

# Hydrogen-powered aircraft: Fundamental concepts, key technologies, and environmental impacts

Eytan J. Adler<sup>\*</sup>, Joaquim R.R.A. Martins

Department of Aerospace Engineering, University of Michigan, Ann Arbor, United States

## ARTICLE INFO

### Keywords:

Hydrogen-powered aircraft

## ABSTRACT

Civil aviation provides an essential transportation network that connects the world and supports global economic growth. To maintain these benefits while meeting environmental goals, next-generation aircraft must have drastically reduced climate impacts. Hydrogen-powered aircraft have the potential to fly existing routes with no carbon emissions and reduce or eliminate other emissions. This paper is a comprehensive guide to hydrogen-powered aircraft that explains the fundamental physics and reviews current technologies. We discuss the impact of these technologies on aircraft design, cost, certification, and environment. In the long term, hydrogen aircraft appear to be the most compelling alternative to today's kerosene-powered aircraft. Using hydrogen also enables novel technologies, such as fuel cells and superconducting electronics, which could lead to aircraft concepts that are not feasible with kerosene. Hydrogen-powered aircraft are technologically feasible but require significant research and development. Lightweight liquid hydrogen tanks and their integration with the airframe is one of the critical technologies. Fuel cells can eliminate in-flight emissions but must become lighter, more powerful, and more durable to make large, fuel cell-powered transport aircraft feasible. Hydrogen turbofans already have these desirable characteristics but produce some emissions, albeit much less damaging than kerosene turbofans. Beyond airframe and propulsion technologies, the viability of hydrogen aircraft hinges on low-cost green hydrogen production, which requires massive investments in the energy infrastructure.

## 1. Introduction

Aircraft are the only vehicles that can transport people and goods across the world within one day. In 2016, aviation drove \$2.7 trillion in economic activity and supported 65.5 million jobs, which made up 3.6% of the global gross domestic product (GDP) [1]. Civil aviation also catalyzes economic growth in developing markets by increasing their access to the global economy. Aircraft efficiency has doubled since the dawn of the jet age thanks to technological breakthroughs and continuous incremental improvements [2]. Compared to other forms of transportation, there is much more of an incentive to reduce the fuel consumption of aircraft because added weight requires increasing lift, which in turn increases drag, further increasing the fuel required. This incentive is why aircraft have been at the forefront of innovations in structures, materials, aerodynamics, control systems, propulsion, operations, and engineering design methods.

However, aviation currently relies on fossil fuels, and its emissions are responsible for 3.5% of climate warming caused by humans [3]. This percentage is bound to increase because aviation is one of the most challenging sources to decarbonize. Given the long development time

of aircraft and slow fleet turnover rate, there is an immediate need to develop new aircraft with drastically lower climate impact.

Hydrogen-powered aircraft emit no carbon dioxide and would reduce or eliminate other emissions while maintaining existing routes. Interest in these aircraft is currently high, but hydrogen aircraft present technical and economic challenges. Handling and storing hydrogen is challenging, particularly as a liquid. Designing hydrogen propulsion systems is also a new challenge. The cost of new aircraft and infrastructure would be significant. Additionally, the price of renewable hydrogen would need to be competitive. These technical and economic factors, along with inertia in the aircraft industry, may slow the transition to hydrogen aircraft.

It is not the first time that hydrogen aircraft have gained interest. In the 1950s, the United States government investigated hydrogen as a fuel to increase the performance of high-altitude reconnaissance aircraft [4,5]. It funded the Lockheed CL-400 Suntan project, a Mach 2.5 reconnaissance aircraft. This project and others around the same time included modeling and experimental studies to investigate hydrogen propulsion, fuel systems, storage, and safety. However, the combination of falling short in range estimates and concerns from government

<sup>\*</sup> Corresponding author.

E-mail address: [eytana@umich.edu](mailto:eytana@umich.edu) (E.J. Adler).

<https://doi.org/10.1016/j.paerosci.2023.100922>

Received 6 December 2022; Received in revised form 17 April 2023; Accepted 4 June 2023

Available online 19 September 2023

0376-0421/© 2023 The Author(s). Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

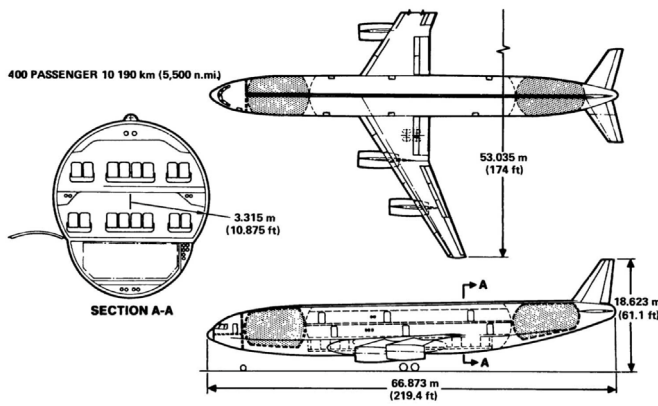


Fig. 1.1. In the 1970s, hydrogen aircraft gained interest because of the oil crisis. NASA contracted Lockheed to investigate the feasibility of a range of hydrogen aircraft concepts, one of which is shown here.

Source: Reproduced from Brewer et al. [9].

funding agencies ended the project. In the 1970s, the oil crisis spurred interest in commercial transport aircraft powered by alternative fuels [6]. Lockheed was funded again, this time by NASA, to investigate using hydrogen to fuel subsonic and supersonic transport aircraft [7,8]. Fig. 1.1 shows one of the concepts. However, the oil crisis waned, and the designs were not pursued further.

Aviation's impact on climate change is driving renewed interest in hydrogen aircraft. Climate change is a long-term and global problem, so this interest might be here to stay. The European Commission-funded Cryoplane project [10], which began in 2000, was the first large-scale project investigating the feasibility of hydrogen aircraft with the motivation of reducing climate impact. In the past decade, the aircraft design community has pursued an array of government- and privately-funded hydrogen aircraft projects and the pace of these projects is accelerating.

Airlines run on slim profit margins, and new commercial airplane programs are costly and risky. Some researchers expect that hydrogen aircraft need government incentives or regulations penalizing conventional aircraft to overcome the industry's inertia and make an economically-compelling case for airlines [11]. However, there may be scenarios where hydrogen aircraft are economically advantageous in the long run.

From a technological perspective, hydrogen-powered aircraft could look similar to today's aircraft and fly similar missions. The most significant changes involve accommodating the hydrogen storage and the new fuel system. A similar approach to today's aircraft would leverage existing design tools and technologies. Alternatively, hydrogen opens possibilities for new technologies, including fuel cells, enabling new configurations and capabilities, such as distributed electric propulsion.

This paper provides the background for readers to play an informed role in the budding hydrogen-powered aircraft industry. We explain the fundamental physics that drives key hydrogen aircraft technologies and review the current state-of-the-art for those technologies. We also describe how those technologies affect the overall aircraft design. Finally, we outline the cost, certification, and climate consequences of hydrogen aircraft.

## 2. The case for hydrogen aircraft

Current transport aircraft are well-optimized. Aircraft manufacturers and airlines continue decreasing fuel burn per seat mile through composite materials, advanced engine technologies, aerodynamic refinement, and improved operational efficiency. However, the continued increase in demand for air transportation is expected to outpace the rate of efficiency improvement. Fig. 2.1 shows that the predicted overall

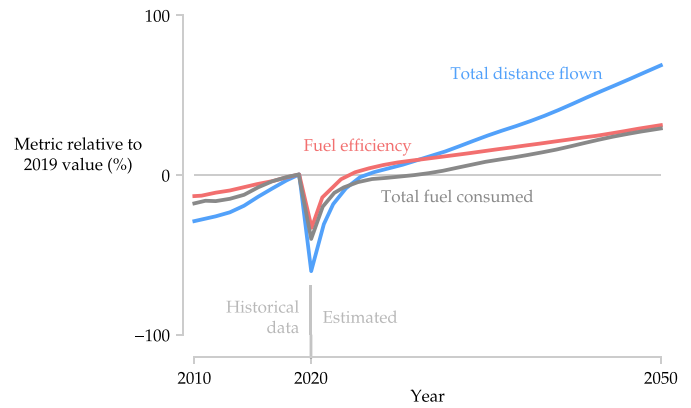


Fig. 2.1. The demand for passenger air travel outpaces aircraft efficiency, so energy consumption is projected to increase through 2050.

Source: Data from U.S Energy Information Administration [12].

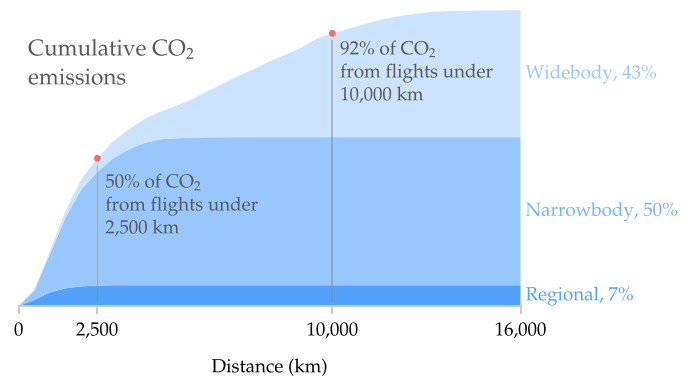


Fig. 2.2. Cumulative CO<sub>2</sub> emissions from passenger aviation in 2019.

Source: Data from Graver et al. [21].

energy consumption of passenger air travel in the U.S. will continue to increase despite efficiency improvements [12]. Similar trends exist globally. The COVID-19 pandemic caused the passenger distance flown to plummet in 2020, but the recovery was swift [13].<sup>1</sup>

The vast majority of commercial aviation's emissions come from narrowbody and widebody aircraft, as shown in Fig. 2.2. Full-electric aircraft powered by batteries can potentially eliminate direct emissions from short-haul regional routes in the coming decade. However, most commercial flights cannot be replaced by full-electric aircraft because the specific energy (energy per mass) of batteries is far too low [15,16]. The specific energy of batteries is currently about 50 times lower than that of kerosene. Filling the entire fuselage of a Boeing 737 with batteries would only allow it to fly for one hour [17]. Advanced battery chemistries, such as lithium-air, may increase the specific energy by an order of magnitude. However, they still require considerable development to increase their power density, cycle life, and other critical properties [18–20].

There are two schools of thought for drastically reducing aircraft emissions. One advocates using hydrocarbon fuel with reduced lifecycle emissions compared to fossil fuel called *sustainable aviation fuel* (SAF). Using SAF requires only minimal changes to existing aircraft, so it is also known as a *drop-in fuel*. The other school of thought advocates fuels that do not emit any carbon in use, such as hydrogen or ammonia.

<sup>1</sup> The efficiency also decreased temporarily because of lower passenger load factors, as airlines blocked off middle seats, struggled to sell tickets, and, in some cases, operated empty flights to maintain airport slots [14].

SAFs, are hydrocarbon fuels whose production partially offsets the carbon dioxide emitted during flight. This includes fuel derived from plants (biofuels), used cooking oil, waste, and other sources. SAFs are convenient because they can power existing aircraft with minimal or no modifications, offering a solution for near-term emission reduction. SAFs are more expensive than conventional jet fuel, which would increase the aircraft operating cost [22]. Furthermore, SAFs are unlikely to reach net-zero lifecycle emissions, optimistically reducing the climate impact of flying by 60% [23]. Farming the feedstock and chemically synthesizing fuel produce greenhouse gases that prevent SAFs from achieving net-zero lifecycle emissions [24]. Vast amounts of farmland are needed to grow the feedstock. To create new farmland, farmers can plow existing forests or grasslands. The plowed plants and soil release CO<sub>2</sub> as they are decomposing or are burned [25]. Those plants were already absorbing CO<sub>2</sub>, which further hinders the emissions reductions [22]. These changes to the land are called *land use emissions*. Laborde [26] estimates that in Europe, they would cut the benefits of SAFs versus conventional fossil fuels in half. Lark et al. [27] find that the carbon intensity of corn ethanol biofuel is at least as high as gasoline, if not higher, largely because of land use change estimates. Another type of SAF is *electrofuel* (also known as *e-fuel*, or *synfuel*). To produce electrofuel, electrolysis and carbon capture powered by renewable electricity generate hydrogen and carbon dioxide, which are then used to create hydrocarbon fuels through chemical synthesis [28]. Electrofuel requires nearly three times the amount of energy to produce and distribute per unit of energy stored than hydrogen and is expected to be more costly [23].

Hydrogen can be produced using water and renewable electricity via electrolysis. Ammonia can be produced by combining hydrogen with nitrogen from the air via chemical processes [29,30]. Ammonia's energy per weight is one sixth of hydrogen's and half of kerosene's, so it is not favored for aviation applications. Since these fuels do not contain carbon, using them produces no carbon dioxide. However, clean sheet aircraft designs are necessary to reap the benefits of these fuels, primarily because of their different storage properties, energy densities, and propulsion system requirements compared to kerosene.

While they can help reduce the climate impact of existing aircraft, SAFs are not the best long-term solution because they cannot achieve zero CO<sub>2</sub> emissions, require large amounts of land, and are costly. Hydrogen fuel cell aircraft can reach true zero-emission during operation. Hydrogen combustion aircraft eliminate CO<sub>2</sub> emissions and reduce other emissions. Hydrogen aircraft are predicted to be the least expensive and most sustainable way to fly without carbon [31]. Airbus has stated that hydrogen propulsion is the technology with the lowest cost per ton of CO<sub>2</sub> avoided compared to all other options for decarbonizing air transportation.<sup>2</sup> Depending on how optimistic the assumptions are, hydrogen aircraft may also be lighter, use less energy, and have lower operating costs than current kerosene-powered aircraft by taking advantage of hydrogen's high specific energy [7,9,32].

Hydrogen is a potential solution for other hard-to-decarbonize industries. Besides aviation, the most challenging industries to decarbonize are shipping, iron, steel, and cement production [33]. In 2016 these industries made up 14% of global greenhouse gas emissions (CO<sub>2</sub>eq). Hydrogen and biofuels are two of the most promising solutions to reduce the climate impact of steel and cement production [34] and have the potential to power rail and marine applications [35–37]. This further incentivizes developing infrastructure for producing and distributing renewable hydrogen to take full advantage of economies of scale.

For these reasons, hydrogen aircraft have gained traction in industry and government projects. In the near term, Universal Hydrogen (shown in Fig. 2.3) and ZeroAvia are independently retrofitting existing turboprop aircraft with hydrogen fuel cell propulsion systems to serve

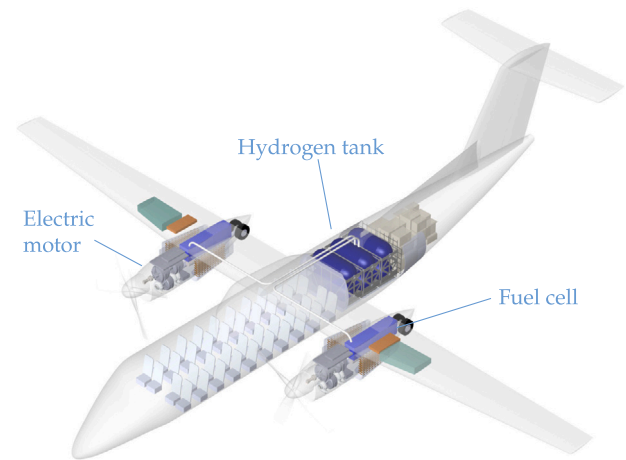


Fig. 2.3. Universal Hydrogen's turboprop fuel cell retrofit concept (Universal Hydrogen image).



Fig. 2.4. H2FLY began flight testing its HY4 aircraft in 2016 (H2FLY GmbH image).



Fig. 2.5. Airbus' ZEROe hydrogen-powered turboprop concept (Airbus image).

regional markets beginning around 2025. H2FLY, bought by Joby Aviation in 2021, is flight-testing its hydrogen fuel cell-powered HY4 demonstrator to develop a hydrogen propulsion system for small to regional aircraft (Fig. 2.4). In the longer term, Airbus announced its ZEROe project in 2020 to develop clean sheet commercial hydrogen aircraft [49], shown in Fig. 2.5. In Europe, the government-funded FlyZero project [50], the Clean Sky 2 Joint Undertaking [23], and the Clean Aviation Joint Undertaking [51] have focused on developing an array of hydrogen aircraft concepts and technologies.

<sup>2</sup> <https://youtu.be/8oh5Pfvtwz8?t=2327>, accessed 24 August 2021.



**Table 2.1**

Large hydrogen-powered aircraft that have flown.

Aircraft	First flight	Storage	Propulsion	Notes	Source
NACA-modified B-57	1957	LH <sub>2</sub>	Turbojet	One hydrogen-powered engine	Sloop [4]
Tupolev Tu-155	1988	LH <sub>2</sub>	Turbofan	One hydrogen-powered engine	Sosounov and Orlov [38]
Boeing Fuel Cell Demonstrator Airplane	2008	GH <sub>2</sub>	PEMFC	Fuel cell provided all power in cruise	Boeing [39]
Antares DLR-H2	2009	GH <sub>2</sub> , 350 bar	33 kW fuel cell		German Aerospace Center [40]
AeroVironment Global Observer	2011	LH <sub>2</sub>			AeroVironment [41,42]
Boeing Phantom Eye	2012	LH <sub>2</sub>	Modified Ford 2.3L ICE		Boeing [43]
H2FLY HY4	2016	GH <sub>2</sub>	45 kW PEMFC		German Aerospace Center [44]
ZeroAvia Piper Malibu demonstrator	2020	GH <sub>2</sub> , 350 bar	PEMFC	Only partially fuel-cell powered	Harris [45], Warwick [46]
ZeroAvia Dornier 228 demonstrator	2023	GH <sub>2</sub>	Fuel cell	Batteries and fuel cell each powered half of left propeller with stock right engine	Crownhart [47]
Universal Hydrogen Dash-8 demonstrator	2023	GH <sub>2</sub>	Megawatt-class PEMFC	Fuel cell powered right engine with stock left engine	Norris [48]

While there is much excitement surrounding hydrogen aircraft, only a few have flown. None have been used regularly by commercial operators or governments (at least based on public knowledge). Table 2.1 lists human-scale hydrogen aircraft that have been flight tested. The frequency of hydrogen aircraft's first flights has increased in recent decades, but most are still small, one-off demonstrators. Experimental flight testing would need to increase substantially to make hydrogen aircraft viable in the near future.

### 3. Hydrogen aircraft design

Using hydrogen as a fuel involves different design challenges and active constraints compared to conventional kerosene-powered aircraft. The differences are primarily due to hydrogen's substantially higher specific energy (energy per unit mass) and unique storage challenges because of its lower energy density (energy per unit volume).

Hydrogen must be stored as a compressed gas or cryogenic liquid to achieve practical energy densities. Table 3.1 lists the specific energy and energy densities of kerosene (Jet A-1), cryogenic liquid hydrogen (LH<sub>2</sub>), and gaseous hydrogen (GH<sub>2</sub>) at two different pressures. The highest energy density for hydrogen is obtained for liquid hydrogen storage, but it is still four times lower than kerosene's. Hydrogen storage requires specialized tanks that incur a weight penalty relative to kerosene storage. The tank efficiency in Table 3.1 quantifies this penalty; we define it in Section 4. Highly compressed hydrogen requires pressure vessel tanks, often cylindrical, to carry the pressure loads. Liquid hydrogen (LH<sub>2</sub>) storage requires a heat management system. The heat from the environment entering the LH<sub>2</sub> (called *heat leak*) causes the liquid to boil. This is called *boil-off* and increases pressure in the tank. If the pressure reaches the tank's structural limit, the hydrogen must be vented, which wastes fuel. To avoid this waste, tanks can be designed to withstand greater pressures, insulate better, or both. To reduce heat leak, cryogenic tanks are most efficient when they have a low surface area-to-volume ratio, so the closer to a sphere, the better.

Low surface area-to-volume ratio tank shapes do not fit well into aircraft wings, so they are usually placed in the fuselage or dedicated fuel pods. Both external fuel pods and additional fuselage space increase the aircraft's wetted area, increasing aerodynamic drag. Removing the fuel from the wings eliminates the structural load alleviation benefit, which may increase the wing's structural weight. Thus, hydrogen storage incurs drag and weight penalties [32,55].

As previously mentioned, hydrogen's energy density is about four times lower than kerosene's; however, its energy per unit mass is nearly three times *greater*. For the same amount of energy required to fly, the weight of hydrogen needed is a third of the weight of the required kerosene. If there were no weight or drag penalties, this would mean a lower takeoff weight and, thus, a smaller wing, particularly for an aircraft with a high fuel fraction (the fuel weight divided by the aircraft's total takeoff weight). Because of the cyclical dependence in the aircraft sizing procedure, a smaller wing further reduces the aircraft drag and structural weight, reducing the takeoff weight, and so on.

However, as already mentioned, there are weight or drag penalties due to the hydrogen storage tanks' added weight, volume, and packaging. Based on previous design studies, it is still unclear whether the net effect of higher energy per unit mass and storage penalties would be to increase or decrease in the energy used for a given flight [32,56]. Verstraete [57] predicts that for large long-haul aircraft, the takeoff weight is reduced by 25% and total energy reduced by 15% compared to a kerosene aircraft. For a similar design mission, the Cryoplane study [56] found a takeoff weight decrease of only 14.8% and a total energy *increase* of 9%. The Cryoplane project aimed to retrofit an existing aircraft rather than design a new one, potentially explaining the differences. As the fuel fraction decreases, so do the takeoff weight savings, potentially becoming a weight increase for small aircraft [56].

The decrease in fuel weight due to hydrogen's high specific energy affects the active constraints in the aircraft's design. A certain amount of energy is required for the aircraft to climb to the cruise altitude. The hydrogen required to provide that energy is roughly one-third of the mass of the required kerosene. This means that a hydrogen aircraft loses less weight in climb than a kerosene aircraft. The higher weight at the end of the climb phase may require more thrust relative to the takeoff thrust. Thus, the top-of-climb thrust requirement is more likely to be an active constraint on the engine design if it is not already active. Secondly, the weight decrease during cruise is lower, so the ideal cruise altitude increases more slowly. This means smaller altitude step climbs or no step climbs at all.

From an operating cost perspective, the high specific energy of hydrogen and lighter takeoff weight may result in lower energy usage for large long-haul flights compared to kerosene [57] (as mentioned, this is in contrast to the Cryoplane study [56]). For smaller, shorter-range aircraft, the same may not be true. The complexity and performance

**Table 3.1**

Properties of liquid (LH<sub>2</sub>) and gaseous (GH<sub>2</sub>) hydrogen [52–54] and approximate tank gravimetric efficiencies (higher indicates a lighter tank). Specific energies are given as the lower heating value (LHV). In some cases, more energy than the LHV dictates may be extracted by condensing water vapor in the exhaust (see Section 5.2.6).

Property	Jet A-1	LH <sub>2</sub>	GH <sub>2</sub> (350 bar)	GH <sub>2</sub> (700 bar)
Specific energy (MJ/kg)	43.2	120	120	120
Energy density (MJ/L)	34.9	8.5	2.9	4.8
Storage temperature (K)	Ambient	20	Ambient	Ambient
Storage pressure (bar)	Ambient	~2	350	700
Tank gravimetric efficiency (%)	100	~30–90	1–15	1–15

penalty of hydrogen storage will likely increase the operating cost. Because of their added complexity, hydrogen tanks and airframes are expected to have higher maintenance and acquisition costs. The tank integration with the airframe adds drag, whether using pods or the fuselage. Verstraete [32] predicts that for large long-haul aircraft, these effects would result in a net decrease in direct operating cost, assuming hydrogen is at cost parity with kerosene on a per-unit energy basis (reasonable expectations for the cost of hydrogen are discussed further in Section 8). The Cryoplane study [56] found that the cost of hydrogen per unit of energy would need to fall to match that of kerosene for the two aircraft to have the same operating cost. The study predicted that this would happen around 2040.

#### 4. Storage

Hydrogen has an extremely low volumetric energy density at ambient temperature and pressure. If the energy that a Boeing 777-200ER carries in kerosene were stored as hydrogen at ambient temperature and pressure, the required volume would correspond to about 500 fuselages of this aircraft. To reduce the required volume, the hydrogen can be compressed as a gas or cooled to make it liquid. If the hydrogen is compressed to 700 bar, the volume would reduce to a single Boeing 777-200ER fuselage. As a liquid, it would be half of that. These calculations do not include redesigning the aircraft to account for weight and fuel volume changes, but they give an idea of the required volume.

The specialized tanks to store hydrogen as a compressed gas or cryogenic liquid result in added weight. An important performance metric to assess the storage efficiency of a tank is *gravimetric efficiency* (also known as *mass fraction*), defined as

$$\eta_{\text{tank}} = \frac{W_{H_2}}{W_{H_2} + W_{\text{tank}}}, \quad (1)$$

where  $W_{H_2}$  is the weight of hydrogen the tank can hold and  $W_{\text{tank}}$  is the weight of the empty tank. The gravimetric efficiency is the fraction of the storage system weight taken up by fuel when it is full—the higher, the better. While this tank metric does not represent the *volumetric* efficiency, it quantifies the weight penalty incurred by using a given hydrogen storage solution. The gravimetric efficiency of kerosene tanks is 100% because they are integral to the wingbox structure and thus do not incur additional weight.

Tank gravimetric efficiency dramatically affects the design trades and benefits of hydrogen-powered aircraft. Tank gravimetric efficiency explains why some researchers say that hydrogen is feasible only for short- and medium-range aircraft, while others say that hydrogen is increasingly beneficial with increasing range. Fig. 4.1 shows how a hydrogen aircraft's fuel energy usage compares to that of a kerosene aircraft with varying tank gravimetric efficiencies and mission ranges. For low gravimetric efficiencies, hydrogen aircraft performance worsens relative to kerosene aircraft the longer the range. The assumption of a lower tank gravimetric efficiency is why some say hydrogen is only suitable for short- and medium-range aircraft. However, when the tank gravimetric efficiency is high, the opposite trend is observed: hydrogen aircraft improve over conventional kerosene aircraft as the range increases. The tipping point where the trend flips is around a tank gravimetric efficiency of 55%, regardless of the mission range. These trends align with energy usage in concepts published by Mukhopadhyaya and Rutherford [58], Verstraete [32], and Brewer and Morris [7].

Fig. 4.2 shows a range of existing and proposed hydrogen tanks, illustrating the relationship between their gravimetric efficiency and

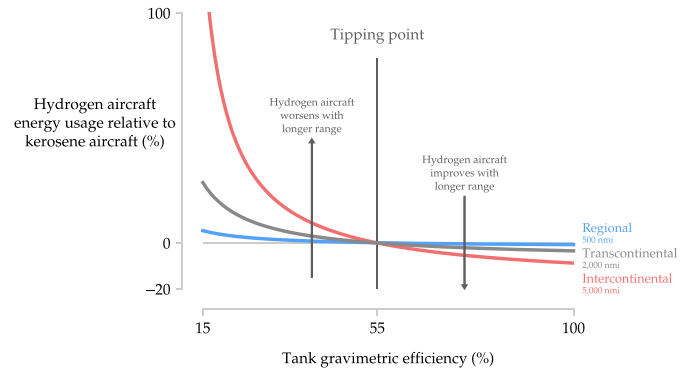


Fig. 4.1. Depending on the tank gravimetric efficiency, hydrogen might be feasible only for short and medium ranges or might improve as the mission range increases. The tipping point between these opposing trends is a tank gravimetric efficiency of around 55%.<sup>3</sup>

the density of the hydrogen storage. The ideal point is as high and to the right on the plot as possible (gravimetric efficiency of 100% and hydrogen density as high as possible) because it means lower tank weight and smaller onboard storage. At first glance, LH<sub>2</sub> seems like the obvious solution. Its gravimetric efficiency is far greater, and the storage density is nearly twice that of compressed hydrogen. This conclusion is often true for large aerospace vehicles with high fuel fractions because they tend to be highly weight-sensitive. However, storing LH<sub>2</sub> adds complexity, which may not be worthwhile for smaller aircraft. This complexity is discussed in Section 4.2.

In Fig. 4.2, there are underlying trends that explain variations in certain tanks. For example, the Space Shuttle used its fuel orders of magnitude more quickly than Boeing's Phantom Eye, and the Shuttle's LH<sub>2</sub> tank was far larger. These effects enable higher gravimetric efficiency (less insulation needed and scaling properties work in the Shuttle's favor). However, the Shuttle's tank could never be used on an aircraft because of its high boil-off rate and single-use nature. For this reason, the plot offers only an idea of what can be expected from certain storage types.

Another challenge with hydrogen storage is hydrogen embrittlement and permeation. Embrittlement drastically decreases the material yield stress and ductility [64–66]. Materials, particularly metals, can become embrittled under tensile stress and hydrogen exposure. Permeation occurs because the hydrogen molecules are so small that some of them make their way through tank wall [64]. To give a sense of reasonable permeation rates, launch vehicle LH<sub>2</sub> tanks allow relatively high permeation losses of about 0.25% of the tank volume during ascent and orbital insertion [67]. Embrittlement and permeation are challenges in compressed and cryogenic storage, as explained in Sections 4.1 and 4.2, respectively.

##### 4.1. Compressed

Compressing hydrogen to high pressures is one way of increasing hydrogen's density for onboard storage. Compressed GH<sub>2</sub> tanks operate at ambient temperatures, which requires much less active management than LH<sub>2</sub>. GH<sub>2</sub> tanks can sit for extended periods without needing to be vented or refilled. These factors reduce the complexity of airplane fuel management.

The downside of compressed hydrogen is that it requires heavy pressurized tanks to withstand the high pressure safely. These tanks have low gravimetric efficiencies, seen in Fig. 4.2. The efficiencies are 1%–10% for most tanks, though it may be possible to achieve 10%–20% with advanced design and manufacturing techniques. Furthermore, compressed GH<sub>2</sub> storage is less space efficient than LH<sub>2</sub> storage.

Table 4.1 lists five categories of pressure vessels for compressed GH<sub>2</sub> storage. Type IV and Type V composite tanks (carbon or glass fiber

<sup>3</sup> Estimates are based on the Breguet range equation. We assume a thrust-specific energy consumption based on the GE90 [59] turbofan and Mach 0.8 cruise at 35,000 ft. The lift-to-drag ratio is assumed to be 20. Tank weight is added to the base zero fuel weight. We found that the tipping point of 55% is insensitive to these parameter values. However, using different lift-to-drag ratios for the hydrogen and kerosene concepts could shift it.

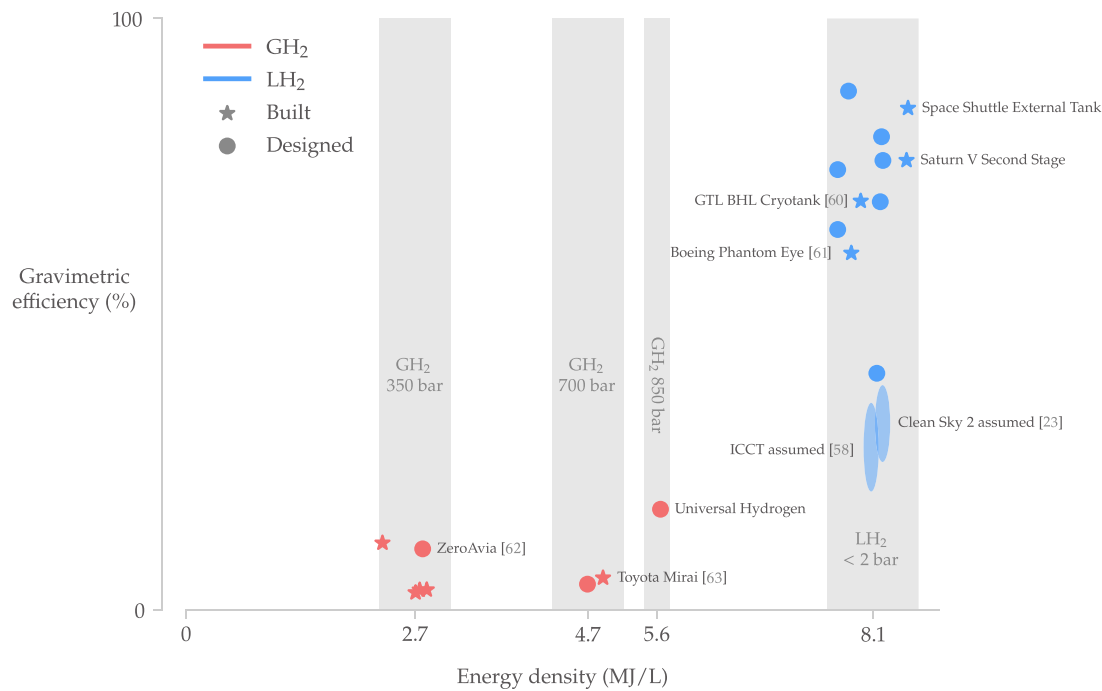


Fig. 4.2. Gravimetric efficiencies (as defined by Eq. (1)) of proposed designs and existing tanks. Realistic gravimetric efficiencies of LH<sub>2</sub> tanks are still uncertain; evolutionary improvements are predicted to be 25%–40% and revolutionary improvements 70% or more (see Refs. [23,58,60–63]).

**Table 4.1**  
Materials and approximate gravimetric efficiency for pressure vessel types [72–74]. The most promising composites to reduce weight are carbon or glass fiber reinforced.

Tank type	Construction	Gravimetric efficiency
I	All metal	1%–2%
II	Mostly metal with some fiber composite overwrap	2%
III	Composite tank with metal liner	4%
IV	Composite tank with polymer liner	5%
V	Linerless composite tank	6%

reinforced) offer the best gravimetric efficiency, achieving one-fifth of the weight of steel and half of the weight of aluminum tanks [68]. Universal Hydrogen, a startup developing hydrogen tanks and conversion kits for existing aircraft, is seeking further weight reduction by removing the resin from the carbon fiber structure [69], shown in Fig. 4.3; it reports gravimetric efficiencies of 17% using this technique (the company now appears to be focusing more on liquid hydrogen storage development).<sup>4</sup> Modeling and experimental research to characterize the permeability of polymer liners and their related failure modes for Type IV tanks is ongoing [70,71].

Another vital weight consideration is the balance of plant, which refers to the necessary auxiliary tank components other than the tank itself. This system includes pressure regulators and valves. Lightweight and reliable balance of plant components are essential for gravimetrically-efficient tanks [72]. The drawback of lightweight composite tanks is the cost; the composite layer makes up 40%–80% of the total tank cost [68].

When considering metal as a material for compressed GH<sub>2</sub> tanks, it is essential to consider hydrogen embrittlement [66]. Metal is prone to hydrogen embrittlement under high tensile stress and when in contact with high-pressure hydrogen. The risk of embrittlement is particularly high at temperatures near or just below room temperature. These are temperatures experienced regularly by passenger aircraft, further increasing the required safety factor for metal hydrogen tanks [66].



Fig. 4.3. Universal Hydrogen reduced its composite GH<sub>2</sub> tank weight by removing the resin (Universal Hydrogen image).

The design of these tanks is nearly always cylindrical because circular cross sections improve structural efficiency for supporting pressure loads. The cylinder’s end caps tend to be hemispherical, torispherical, or ellipsoidal. A hemisphere is the theoretical ideal shape, but it is costly to manufacture because forming flat sheets of metal into a hemisphere is challenging. Therefore, torispherical and ellipsoidal ends are the most common [68]. Manufacturing hemispherical end caps may be easier when using composite materials.

McLaughlan et al. [75] provide a qualitative overview of composite overwrapped pressure vessels (COPV), which are lightweight relative to other GH<sub>2</sub> storage solutions. Colozza [76] presents a simplified analysis method for sizing GH<sub>2</sub> tank wall thickness. Netting analysis [77,78] is an analytical technique for fiber-reinforced composite analysis that ignores the polymer matrix and assumes the fibers carry all the loads. This technique is well-suited for first-order pressure vessel analysis. It offers higher fidelity for analyzing fiber directions and layers than

<sup>4</sup> <https://youtu.be/fsN90HSglxc?t=53>, accessed 21 November 2022.

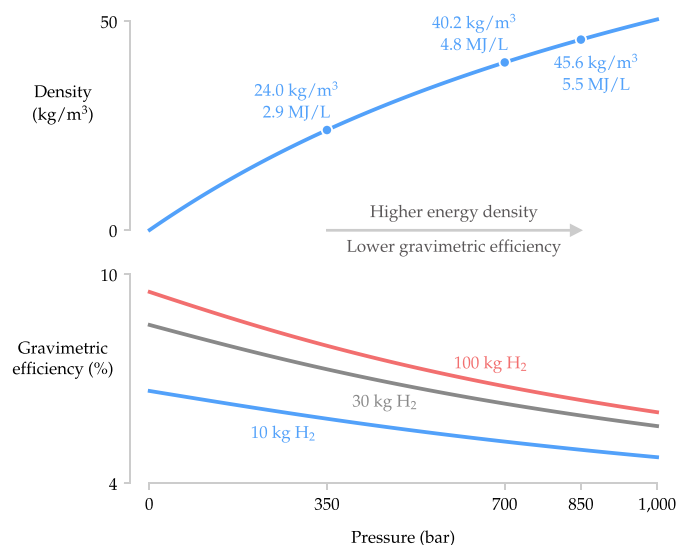


Fig. 4.4. For compressed GH<sub>2</sub> storage, there is a tradeoff between weight and storage density that depends on the storage pressure. The upper figure shows GH<sub>2</sub> density at an ambient temperature of 15 °C (standardized equation from Lemmon et al. [81]). The lower figure shows the approximate trend in tank gravimetric efficiency with respect to storage pressure and mass of hydrogen stored. The absolute value for the gravimetric efficiency depends on the tank design and intended application.

Colozza's technique, but it is still simple enough to carry out by hand or quickly implement in a program. Safety factors for the design of these tanks vary depending on the application, but a factor of 2.25 is common [79,80].

Determining the optimal pressure for compressed GH<sub>2</sub> tanks is essential for achieving the best performance for a given application. Higher pressure enables higher energy density; 350 and 700 bar are common design pressures. However, higher pressure requires a heavier tank to withstand the pressure and incurs higher costs [79]. Fig. 4.4 shows the opposing influences of increased density and decreased gravimetric efficiency as pressure increases. It also shows increased gravimetric efficiency for greater volume but with diminishing returns. The gravimetric efficiency in this plot assumes a tank with a 3:1 length-to-diameter ratio and hemispherical end caps. The wall thickness sizing uses a simple netting analysis times an empirical factor to account for the liner, valves, regulators, and other components. For applications where high energy density is critical, higher pressures may be worth the increased cost, complexity, and weight. Nonetheless, there is variability in the chosen design pressure, even for similar applications. Universal Hydrogen has opted for a high 850 bar pressure for its composite tanks [69], while ZeroAvia has chosen 350 bar for its testbed aircraft [46] (this is subject to change for the production model).

Despite the downsides of compressed GH<sub>2</sub> storage, there is a compelling case for less weight-sensitive applications, such as small regional aircraft. Compressed GH<sub>2</sub> can be stored passively and at ambient temperature for long periods, enabling easier transportation and system design. It also avoids dealing with cryogenic fuel, simplifying onboard fuel systems and refueling operations. These factors may result in a lower cost for GH<sub>2</sub> storage than LH<sub>2</sub> for smaller aircraft.

## 4.2. Cryogenic liquid

Cryogenic LH<sub>2</sub> storage offers two main advantages over compressed gas storage: firstly, the density of the hydrogen is increased by a factor of 2 to 3; secondly, the hydrogen can be stored near ambient pressure—1 to 3 bar. These two advantages enable gravimetric efficiencies over 50%, shown in Fig. 4.2. The significant drawback is that hydrogen boils at 20 K, which requires significant insulation and careful fuel

system design. Larger commercial transport aircraft are so weight-sensitive that higher gravimetric efficiencies are necessary to enable these missions to use hydrogen, as shown in Fig. 4.1. Airbus plans to use LH<sub>2</sub> for all future hydrogen aircraft in its ZEROe project [49]. Nearly all studies of hydrogen aircraft to replace current turbofan-powered commercial aircraft propose LH<sub>2</sub> storage [7,32,56].

Storing hydrogen at cryogenic temperatures brings new design challenges and increases complexity. The tank shape should have a low surface area-to-volume ratio to reduce heat entering the fuel. To further reduce boil-off, the tanks require thermal insulation. The tank structure needs to tolerate cryogenic temperatures. This means that the materials should maintain sufficient strength at low temperatures. In addition, when layering different materials, their thermal expansion coefficients should be compatible so that induced stresses during cooling and heating do not rupture the tank. The temperature of LH<sub>2</sub> is low enough to solidify nearly all gases and fluids, so special attention must be paid to avoid freezing other components and frost buildup inside and outside the aircraft.

Hydrogen that boils off rises to the gaseous upper region of the LH<sub>2</sub> tank, called the *ullage*. The ullage increases in pressure as hydrogen boils off, and it must be vented if the pressure reaches the tank's limit. Determining the appropriate amount of boil-off is a balance between reducing insulation weight and meeting all operational constraints. A commonly cited value to give an idea of the order of magnitude for an acceptable boil-off rate for hydrogen aircraft is 0.1% of the hydrogen weight per hour [64]. The short- to mid-range commercial transport aircraft concepts presented by Silberhorn et al. [82] boil off about 2% of the total fuel during the mission.

In practice, adequate boil-off is determined by operational constraints, such as sitting overnight without venting [64,83]. For a high-altitude long-endurance aircraft, Millis et al. [84] find that the most demanding time for the tank insulation is when the aircraft is parked with a full tank before takeoff in a hot desert, which can reach ambient temperatures 51 °C. In that scenario, the ambient environment is hot, and the ullage is small, so there is little room for the boil-off gas. Furthermore, the mass flow rate of fuel out of the tank is low or zero, so there is no pressure relief from an increasing ullage volume. Acceptable boil-off rates also depend on the mission length, aircraft size, tank venting pressure, and other factors.


### 4.2.1. Insulation

The most commonly considered insulation types are foam, sometimes referred to as *spray-on foam insulation* (SOFI), vacuum-based insulation, or a combination of the two. Active refrigeration has also been considered to avoid boil-off, but both Brewer [55] and Millis et al. [84] find that it adds complexity, and the added weight vastly exceeds the weight of fuel saved.


SOFI has a long history in space applications, including the Space Shuttle's external tank, shown in Fig. 4.5. However, it is poorly suited to hydrogen aircraft. The most significant barrier is its inability to handle repeated thermal cycles. To enable aircraft maintenance or storage, the tank must cycle between cryogenic operating conditions and ambient temperature without damage. SOFI is prone to cracking or delaminating from the tank's structural wall [85]. It may also require regular maintenance to ensure adequate thermal performance [64]. Therefore, it is practical only for single-use launch vehicles. Transport aircraft are expected to fly multiple times per day and operate for weeks or months between maintenance checks. Significant foam insulation technology breakthroughs would be required to meet these criteria.

Although SOFI has lifetime and maintainability issues, Brewer [55] and Verstraete et al. [87] still propose using it for transport aircraft LH<sub>2</sub> tanks, shown in Fig. 4.6. This is in part because they estimate it will enable higher tank gravimetric efficiencies. To work around SOFI's intolerance to thermal cycling, they suggest always leaving some LH<sub>2</sub> in the tank to keep it at cryogenic temperatures, except during major maintenance checks. The Boeing Phantom Eye aircraft is another



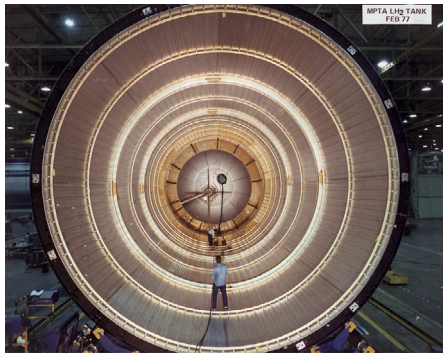

(a) Cross section of the Space Shuttle's external  $\text{LH}_2$  tank showing the internal structure.

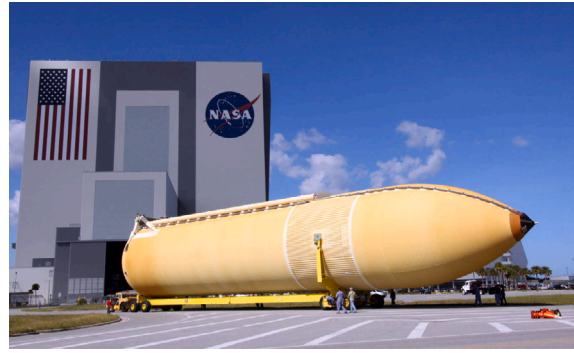

(b) The external tank was covered in a layer of spray-on foam insulation (the orange material) that was 1–2 inches thick [86].

Fig. 4.5. The Space Shuttle's external tank stored  $\text{LH}_2$  and oxygen. Its outer layer was spray-on foam to insulate the cryogenic fuels (NASA images).

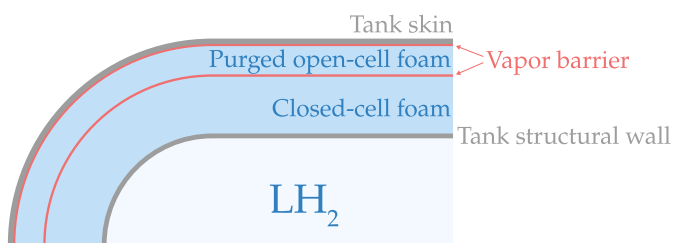


Fig. 4.6. A possible foam insulation configuration that uses an inner layer of closed-cell for its low thermal conductivity and an outer layer of open-cell foam that deforms as the inner layers grow and shrink from thermal expansion [55,87].

exception that used SOFI to insulate its  $\text{LH}_2$  tanks [61,88]. At the time, SOFI was the only technology that met the mission requirements and had an acceptable technology readiness level. Less restrictive time and budget constraints would have enabled additional insulation technology development.

The heat leak of vacuum insulation is much lower than that of foam insulation. Vacuum-based insulation methods are also more reliable than foam-based systems. Airbus appears to have selected vacuum insulation for its  $\text{LH}_2$  tanks [89]. In the tank's vacuum gap, radiation becomes a significant component of the heat leak. Placing multiple layers of highly reflective foil in the gap reduces the radiation. These layers, called *multi-layer insulation* (MLI), lower the thermal conductivity by two orders of magnitude compared to foam insulation [64, 90].

One drawback of vacuum-insulated tanks is that they require two walls to support the vacuum, resulting in heavy tanks. With current technology, gravimetric efficiencies of around 60% appear possible [84, 91]. There are several ways to reduce the weight of the vacuum walls. Machining a pattern of ribs into the wall to stiffen the structure is a promising technique [61,92]. Sullivan et al. [92] find that aluminum alloys are competitive materials for the tank walls but that a nanoclay-enhanced graphite-epoxy outer tank would be lighter. Employing composites creates new challenges, such as hydrogen permeation and mismatches in the thermal expansion coefficients of the fibers and matrix. If the application requires storing hydrogen for hours to days, vacuum-insulated  $\text{LH}_2$  storage systems may be lighter overall than foam-insulated ones [64,92]. This is because the lower thermal conductivity of vacuum insulation results in less boil-off, which means less fuel must be loaded initially, and the tanks can be smaller.

A common concern with vacuum-insulated tanks is that the vacuum may fail, causing boil-off rates to increase dramatically [55,87]. This problem can be addressed by designing the venting system to handle such cases, as specified in CGA S-1.2 [93]. Upon failure, the boil-off

rate is high. The tank's outer wall cools down drastically, causing the gases in the air to freeze on the tank's surface. This provides temporary insulation, reducing the boil-off rate. Additionally, it might make sense to include a thin layer of foam insulation to reduce the boil-off in the case of a vacuum failure [64,87].

#### 4.2.2. Tank materials

An ideal tank wall structural material has a high strength-to-weight ratio, maintains strength at cryogenic temperatures, and has a low cost. Aluminum alloys, composite materials, stainless steel, and titanium alloys are frequent candidates [92,94]. Stainless steel is usually too heavy for aircraft and may experience hydrogen embrittlement under certain conditions. Titanium has suitable material properties but is one order of magnitude more expensive. Aluminum alloys and composites are the most commonly proposed materials for aircraft cryogenic hydrogen tanks. Aluminum has high strength, low susceptibility to hydrogen embrittlement, and low cost, making it suitable for cryogenic tank walls. Composites also have a promising future for further weight reduction. The current challenges are the higher cost compared to aluminum and complex failure modes [75]. Engineers also have limited experience with composites under these cryogenic conditions. Material challenges include cooling-induced stresses due to different thermal expansion coefficients in the resin and fiber, cracking, and potentially hydrogen permeability. The permeability could be addressed with a liner [95], but linerless designs may also be feasible [96,97]. Silberhorn et al. [82] and Brewer [55] use a safety factor of two to account for these unknowns, though that is likely conservative. Mital et al. [64] note mandated safety factors between 1.4 and 2. Considering all factors, aluminum alloys currently appear to be the best material, but further research and development may result in composites becoming advantageous for some applications.

#### 4.2.3. Integral versus non-integral tanks

Another consideration when sizing the tank is deciding whether the tank's structure is integral to the aircraft structure or not. Fig. 4.7 shows sketches of integral and non-integral tanks. Integral tanks are commonly chosen in design studies because they enable aircraft weight savings [32,56,98,99], achieved by using the tank wall to serve multiple load-carrying purposes. In tube-and-wing configurations, the integral tank extends the fuselage with the same cross-sectional shape. Compared to non-integral tanks that must fit inside the fuselage structure, integral tanks can use the whole fuselage cross-section. This may allow shapes closer to a sphere with lower surface area-to-volume ratios because the tank can be shorter longitudinally.

Vacuum-insulated tanks have a thick outer wall, potentially making them well-suited to integral tank configurations. Foam-insulated tanks may be more challenging to make integral because their structural



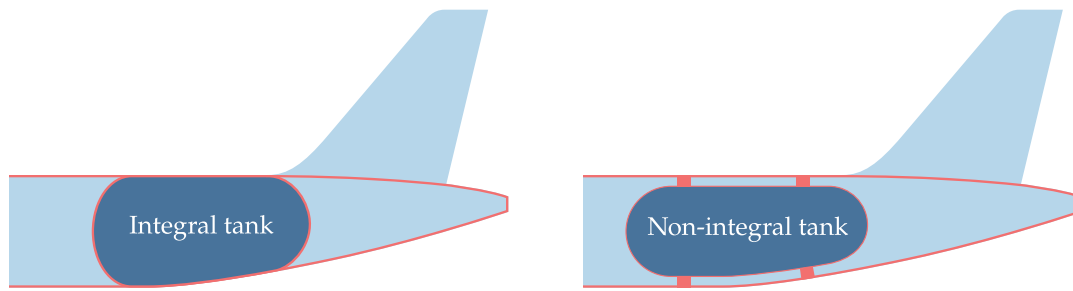


Fig. 4.7. The structure of an integral tank is integrated with the airframe and carries external structural loads, while the non-integral tank carries only fuel-related loads.

wall is usually underneath the foam insulation. Nonetheless, integral foam-insulated tank designs have been proposed [32,55].

The advantage of non-integral tanks is that they can be positioned anywhere in the aircraft. They are also easier to model because supporting aircraft structure loads need not be considered. Because detailed finite element models are not feasible in the conceptual design stage, the most common method of including aircraft structure loads to design integral tanks is to use a safety factor [57]. Onorato et al. [100] find that the larger the aircraft, the greater the advantage of integral tanks over non-integral ones because of the increased mass savings.

Expressing the gravimetric efficiency of integral and non-integral tanks introduces a bookkeeping challenge. Compared to the wall of a non-integral tank, an integral tank wall must be stronger to carry the additional airframe loads. The thicker wall could make integral tanks appear to have worse gravimetric efficiencies even though the aircraft weight is lower. A fairer tank gravimetric efficiency calculation should exclude the portions of the integral tank that contribute to the carrying of airframe loads. This should include at least part of the fuselage skin, but determining exactly how much to include requires detailed analysis.

#### 4.2.4. Tank shape

A low tank surface area-to-volume ratio reduces the boil-off rate. The heat entering the  $\text{LH}_2$  is proportional to the surface area of the storage tank. The boil-off rate is roughly proportional to the amount of heat entering the  $\text{LH}_2$ . The amount of hydrogen that can be stored is proportional to the tank volume. This has two consequences. The first is that the tank surface area should be reduced as much as possible for a given volume to reduce the boil-off rate (a sphere is best from a boil-off standpoint). The need to reduce the surface area-to-volume ratio is why it is not effective to store  $\text{LH}_2$  in the wingbox as is done with kerosene. The second consequence is that larger tanks have an advantage from a boil-off perspective because surface area scales with the square of the characteristic dimension, whereas the volume scales with the dimension cubed. Fig. 4.8 illustrates these trends.

$\text{LH}_2$  tanks must be able to contain pressures on the order of a few atmospheres. They are usually shaped to carry these loads efficiently, similarly to the  $\text{GH}_2$  tanks discussed in Section 4.1. However, since the pressure is only a few atmospheres rather than the hundreds needed for  $\text{GH}_2$ , it might be feasible to design  $\text{LH}_2$  tanks shaped to conform to the spaces available in the airframe. Conformal tank designs incur a weight penalty because they use a suboptimal pressure vessel shape. However, the weight penalty might be offset by improved aerodynamics or tank integration into the airframe.

NASA studied conformal tanks for single-stage-to-orbit (SSTO) vehicles. NASA's X-33 SSTO demonstrator, shown in Fig. 4.9, was one of the first concepts to use conformal  $\text{LH}_2$  tanks [64]. The tanks were ahead of their time; they were integral to the airframe structure, constructed of fiber-reinforced composites, and linerless. Unfortunately, they failed during testing, and the project was eventually cancelled. NASA continued to pursue conformal and integral composite tanks, eventually succeeding by applying the lessons learned from the X-33 testing, such as using an impermeable liner [64,101]. Conformal

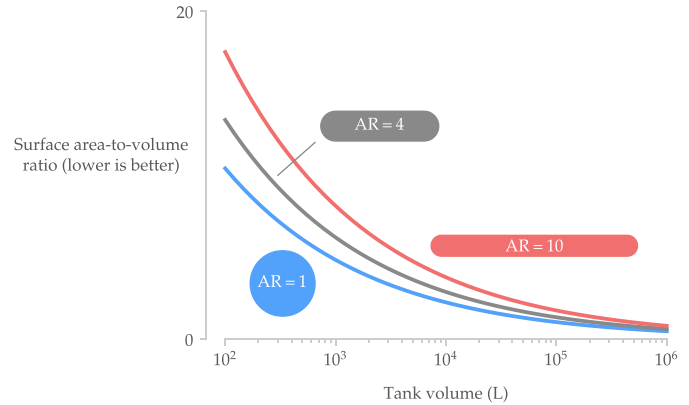


Fig. 4.8. The surface area-to-volume ratio decreases as the tank volume increases, which is desirable to reduce heat leak. Tank shapes closer to a sphere also reduce the surface area-to-volume ratio. AR is the length-to-diameter ratio.

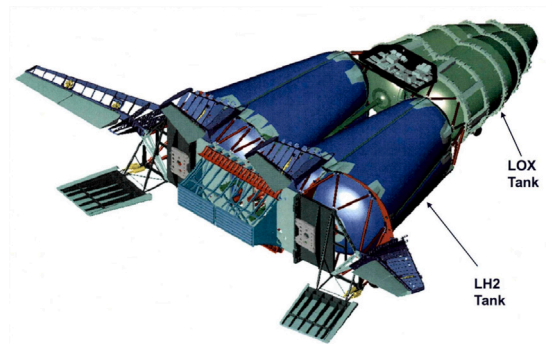


Fig. 4.9. The NASA X-33 project designed and tested conformal  $\text{LH}_2$  tanks. Source: Reproduced from Letchworth [103].

tanks have garnered renewed interest; Collins Aerospace has proposed a variable geometry box-shaped  $\text{LH}_2$  tank built with thermoplastic composites [102].

#### 4.2.5. Operating pressure

As with  $\text{GH}_2$ , the tank design operating pressure—also called maximum expected operating pressure (MEOP) or venting pressure—must be considered in the tank's structural sizing. These values are specified in absolute pressure rather than gauge because if the tank pressure reduced as the aircraft climbs to altitude, substantial amounts of hydrogen would boil off as the liquid and gaseous hydrogen in the tank equilibrate [55]. On this same front, the tank wall structure must be sized to contain the pressure differential between the design pressure and the minimum atmospheric pressure in which the aircraft flies. While lower design pressures result in lighter tank walls because of this structural sizing consideration, two factors require higher design

pressures. The tank pressure must always be greater than the atmospheric (and cabin) pressure to prevent air from leaking in and forming a combustible mixture. Secondly, a higher venting pressure allows for more  $\text{LH}_2$  to boil off before venting is necessary.

These two factors result in typical minimum operating pressures of about 1.2 bar and venting pressures between 1.5 and 3 bar. For example, Millis et al. [84] find that 2 bar is the optimum operating pressure for their high-altitude long-endurance aircraft's 8.5 ft diameter  $\text{LH}_2$  tank. In their case, further reduction of the operating pressure offers no weight reduction because the tank's inner wall is already at its minimum manufacturable thickness. Smaller tanks tend to have a higher venting pressure because they need more insulation per unit of  $\text{LH}_2$  due to the greater surface area-to-volume ratio. A higher venting pressure enables reduced insulation weight because more hydrogen can boil off before venting is necessary [87]. Conversely, larger tanks tend to have lower venting pressures. The tank is not filled beyond 95%–98% with liquid to avoid reaching the venting pressure too quickly when nearly full [84,87]. If the tank were filled beyond this level, the ullage volume would be so small that the pressure would rise too rapidly. The contraction of the tank when it is cooled from ambient to cryogenic temperatures must be considered when determining this fill level.

#### 4.2.6. Modeling boil-off

Given the complex constraints on boil-off, the  $\text{LH}_2$  boil-off must be modeled. The model can be divided into two necessary components. The first is a model of the heat entering the tank. The second is a model of how the heat leak affects the boil-off rate and pressure rise in the ullage.

To estimate the heat leak, Verstraete [57] develops a thermal circuit model. He assumes forced convection, radiation on the tank's surface, conduction through the tank walls, and natural convection in the tank interior. Verstraete et al. [87] adds a 30% empirical factor for heat transfer through support, connections, and piping.

Accurately estimating the boil-off rate and pressure rise in the ullage is challenging because of the complex coupled physics of heat transfer, phase changes, varying fluid properties with temperature and pressure, and thermal stratification and convection in the ullage and liquid. Mendez Ramos [104] reviews existing approaches and proposes a modified model for conceptual design. The simpler models traditionally used in conceptual design, namely the homogeneous model used by Verstraete [57] and Onorato [99], can be off by a factor of two [104]. Nonetheless, they may still offer insights in the conceptual design stage. By separating the tank into control volumes and incorporating empirical relationships, Estey et al. [105] and Mendez Ramos [104] (based on work by Ring [106]) develop moderate fidelity models that better capture the tank behavior while still maintaining complexity manageable in conceptual design.

#### 4.3. Other storage methods

Alternative hydrogen storage methods include metal hydrides, chemically bound hydrogen, cryo-compressed hydrogen, and slush hydrogen. Overall, these other storage methods are too heavy to be useful for aircraft. Metal hydrides store 1 to 5% hydrogen by weight and require a long time to recharge [55]. Chemically bound hydrogen can store 5 to 15% hydrogen by weight but requires additional energy and complexity to separate the hydrogen [107]. Cryo-compressed hydrogen is pressurized  $\text{LH}_2$  stored in a high-pressure cryogenic hydrogen tank (usually 100s of bars). As discussed in Section 4.2, higher venting pressures allow more boil-off before venting is needed (which may be needed with hydrogen cars that sit for extended periods) but require thicker tank walls that make the tanks heavy. Slush hydrogen, where a portion of the hydrogen is solid, has a slightly higher density and heat capacity than  $\text{LH}_2$ . Its downside is that it is energy intensive to produce because of how much cooling is necessary, which results in higher production costs (8%–17%) [56,57]. Brewer [55] identifies hypersonic aircraft as an exception where slush hydrogen may be beneficial.

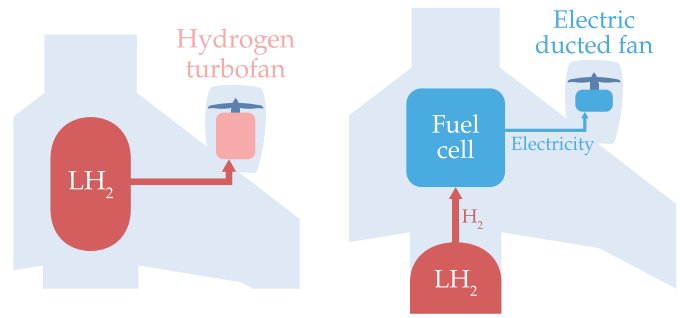


Fig. 5.1. The most commonly studied propulsion architectures are hydrogen combustion and pure fuel cell. As with electrified aircraft, there is a wide range of possible hybrid architectures [16].

## 5. Propulsion

Combustion in turbomachinery and hydrogen fuel cells are the two most common methods to turn hydrogen into thrust (see Fig. 5.1). Combusting hydrogen in a gas turbine to produce thrust leverages technology already used in commercial aircraft. Turbofans and turboprops are powered by gas turbines and cover the vast majority of current air transportation needs. Because hydrogen has different combustion properties than kerosene, new engines optimized specifically for hydrogen must be designed. However, it is possible to adapt existing turbomachinery to burn hydrogen by modifying the combustor and fuel supply system [108]. Fuel cells convert hydrogen to electricity, which can be used to power a propeller or ducted fan. Most of the thrust in modern turbofans is generated by the fan, so it is conceivable that a ducted fan can match the thrust of a turbofan. However, larger electric motors with high power density need to be developed. The highest power aerospace grade electric propulsion unit commercially available and flight tested is magniX's 650 kW magni650 [109]. Transport aircraft powered by electric ducted fans require rated powers of at least 1 to 10 MW [110]. Fuel cells produce electricity from hydrogen with efficiencies as high as 60% and only water vapor as a byproduct. The downside of fuel cells is that they are challenging to scale to high-power applications because of specific power and thermal constraints. While combustion solves fuel cells' specific power and thermal problems, it also has a higher environmental impact because it produces nitrogen oxides ( $\text{NO}_x$ ) in addition to water vapor.

Fig. 5.2 shows the propulsion systems chosen by various concepts from industry and the literature. Fuel cells appear to be the dominant choice for small short-range aircraft, while hydrogen combustion dominates for large long-range aircraft. Fuel cells are preferred for smaller aircraft because, unlike turbomachinery, their efficiency is relatively constant across a wide range of sizes. This is because the electrical current a fuel cell can produce is approximately proportional to the active area available for the reactions to take place; doubling the active area roughly doubles the current [111]. Fuel cells' ability to scale down and maintain their efficiency can enable higher efficiency propulsion systems for these aircraft than is possible with hydrogen combustion. As the propulsion system power requirements increase, combustion eventually displaces fuel cells. This is because turbofans have higher specific power and fewer thermal management challenges than fuel cells; a fuel cell propulsion system for a 737-sized aircraft would be three times heavier than a similarly-sized turbofan system (see calculation details in Section 5.1). With creative engineering, the higher efficiencies of fuel cells may be beneficial for longer ranges because they can reduce fuel weight.

### 5.1. Combustion

Gas turbines have been the aircraft propulsion system of choice for decades in the form of turboprops and turbofans. Legacy manufacturers

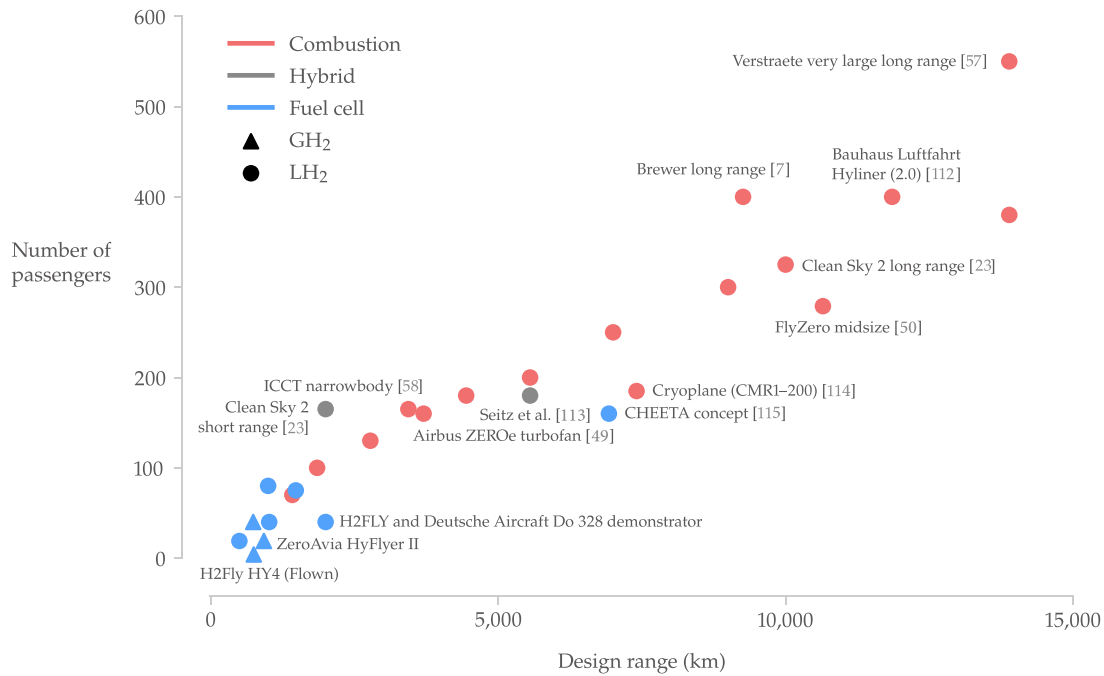


Fig. 5.2. Hydrogen combustion is currently the preferred propulsion system for aircraft larger than small turboprops (see Refs. [7,23,49,50,57,58,112–115]).

have accumulated vast experience in gas turbine propulsion thanks to sustained investment in the development of computational models, engineering knowledge, and manufacturing techniques. The concept of a hydrogen-powered gas turbine remains the same as kerosene-powered engines, and thus engineers can leverage the previous experience. Gas turbines have higher specific power than other propulsion methods, particularly for high-power propulsion. For example, the fuel cell-powered propulsion system of the 737–800-sized CHEETA aircraft [115,116] is roughly three times heavier<sup>5</sup> than estimates of the turbofan propulsion system installed on the 737–800 [117–119].

Because of the high specific power and historical engineering experience with turbomachinery, hydrogen combustion is the proposed solution for many hydrogen aircraft—particularly those from airframers and aircraft engine manufacturers. The four largest commercial aircraft engine manufacturers (GE Aerospace, Rolls-Royce, Pratt & Whitney, and Safran) have all published plans to build and test hydrogen combustion aircraft engines. CFM (a joint venture between GE Aerospace and Safran) is modifying a GE Passport turbofan to run on hydrogen. Airbus plans to fly the modified engine on an A380 demonstrator with liquid hydrogen tanks by around 2025 [120]. Pratt & Whitney announced its HySITE project, funded by ARPA-E, to develop an LH<sub>2</sub> combustion engine with steam injection to reduce NO<sub>x</sub> emissions [121]. They claim they will achieve greater thermal efficiency than fuel cells and lower operating costs than burning SAF. Rolls-Royce performed ground tests of an AE 2100 engine converted to combust hydrogen in 2022 and has plans to do the same with a Pearl 15 engine [122].

#### 5.1.1. Combustor modifications

The fan, compressor, turbine, and nacelle in a hydrogen-powered gas turbine all work the same way as they do with kerosene and thus require minimal design changes, if any. The only component that requires significant changes is the combustor. To understand why hydrogen combustion is different, we must first review basic thermodynamic terms. The *stoichiometric fuel-to-air ratio* is the ratio of fuel mass flow

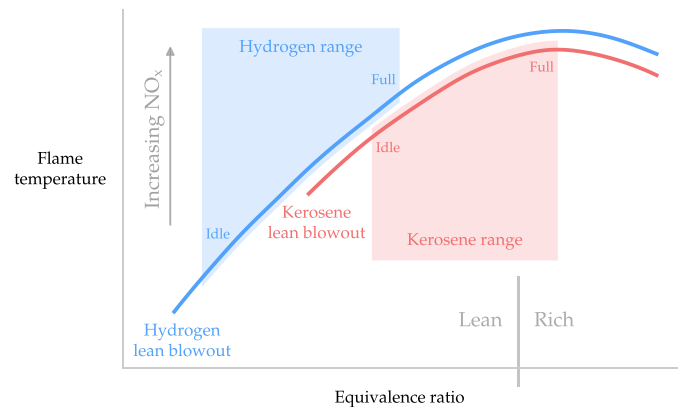


Fig. 5.3. Hydrogen has wider flammability limits than kerosene, which means that it can be burned leaner.

Source: Adapted from Brand et al. [108].

to air mass flow where all the fuel is burned, and all the oxygen in the air is consumed. Hydrogen's stoichiometric fuel-to-air ratio is 1:34, which is less than half kerosene's 1:15. Dividing the actual fuel-to-air ratio by the stoichiometric fuel-to-air ratio yields the *equivalence ratio*, a helpful parameter for quantifying how much air is involved in the combustion. Equivalence ratios less than one correspond to lean combustion, in which more air is supplied than is necessary to fully burn the hydrogen. Hydrogen's wider flammability limits enable it to be burned much leaner than kerosene [123], as illustrated in Fig. 5.3.

The downside of the greater flammability range is that the hydrogen-air mixture is so reactive that premixing before injection into the combustor is risky. Premixing introduces the risk of *flashback*, where the flames travel upstream from the combustor into the mixing zone.

Although hydrogen combustion does not produce soot, CO<sub>2</sub>, or other pollutants produced by hydrocarbon combustion, it still produces nitrogen oxide (NO<sub>x</sub>). The amount of NO<sub>x</sub> produced depends on the residence time and combustion temperature. Hydrogen has a higher flame speed than kerosene. This means faster combustion and thus shorter residence times, yielding lower NO<sub>x</sub> emissions and shorter combustors.

<sup>5</sup> The CHEETA propulsion system weight includes the fuel cell, ducted fan, and superconducting electric motor weights. The 737–800 installed engine weight incorporates nacelle, pylon, and auxiliary system weight estimates.



Hydrogen's flame temperature is greater than kerosene's when burned at an equivalence ratio of one. However, the flame temperature can be lowered because hydrogen can be burned much leaner than kerosene. Assuming the hydrogen-air mixture is fully mixed, the lower flame temperature of lean combustion reduces  $\text{NO}_x$  production. However, without sufficient mixing, hot spots form in regions where air and fuel are at stoichiometric conditions, producing  $\text{NO}_x$ . Mechanisms to increase the mixing intensity without premixing the fuel and air are necessary to enable low- $\text{NO}_x$  hydrogen combustion.

Khandelwal et al. [123] cite lean direct injection (LDI) and micro-mix combustion as two mechanisms to mix hydrogen more thoroughly. Both use many small gaseous hydrogen injectors at an angle to the airflow direction to increase the turbulent mixing of the two streams. Marek et al. [124] performed experimental tests of LDI combustion and achieved low  $\text{NO}_x$  emissions, stable combustion, and no flashback even without significant optimization. Dahl and Suttrop [125] converted an Airbus A320 auxiliary power unit (APU) from kerosene to hydrogen with a micro-mix combustor. The initial conversion from kerosene to hydrogen gas nozzles with no further modifications resulted in minimal changes to the  $\text{NO}_x$  emissions. After fitting the micro-mix combustor, the  $\text{NO}_x$  emissions decreased by a factor of four.

### 5.1.2. Benefits of hydrogen over kerosene

Hydrogen's ability to combust at lean equivalence ratios reduces the temperature of the hot gas entering the turbine after combustion. Reduced turbine inlet temperature increases the turbine's lifetime and decreases the maintenance frequency. Corchero and Montañés [126] find a 37 K decrease in turbine inlet temperature for a hydrogen combustion engine compared to a similar kerosene engine, which translates to nearly doubling the turbine's life.

If the hydrogen is stored onboard as a liquid, it provides a large heat sink. This allows engine designers to explore creative ways of increasing performance. Boggia and Jackson [127] analyze three potential changes to a hydrogen-burning version of the A320's engine (IAE V2527-A5). They investigate precooling air entering the compressor to make compression easier and estimate a 5.7% reduction in thrust-specific fuel consumption (TSFC). They also consider cooling bleed air around the combustor and mixing it before the turbine, enabling increases to the turbine inlet temperature and a 2.1% reduction in TSFC. Finally, vaporizing the fuel is critical, but further preheating using the engine's hot exhaust reduces fuel consumption. Corchero and Montañés [126] estimate a 1%–3% decrease in TSFC by heating the hydrogen fuel from 25 to 250 K. Abedi et al. [128] also investigate uses for  $\text{LH}_2$  in the engine cycle. They find only limited improvements to TSFC, but optimizing the engine cycle around these changes may uncover more significant fuel savings.

Other than the hydrogen-specific changes to the combustor and potential adjustments to the engine cycle that take advantage of the cryogenic fuel, most future advancements apply to both kerosene- and hydrogen-powered engines [129]. In particular, further increases in the bypass ratio to improve propulsive efficiency and increases in the overall pressure ratio to improve thermal efficiency. Advanced materials, design, and manufacturing will reduce engine weight.

### 5.1.3. Modeling for conceptual aircraft design

One essential metric in aircraft design is the thrust-specific fuel consumption (TSFC) of the engine, which is the fuel mass flow rate required per unit thrust the engine produces, that is

$$\text{TSFC} = \frac{\dot{m}_{\text{fuel}}}{F_{\text{thrust}}}, \quad (2)$$

where  $\dot{m}_{\text{fuel}}$  is the fuel mass flow rate and  $F_{\text{thrust}}$  is the thrust. Although TSFC is widely used for comparing engines, it is not appropriate for comparing engines that use fuels with different energy densities. For example, a given mass flow rate of hydrogen delivers nearly three times more energy than the same mass flow of kerosene. Instead of

quantifying the mass flow rate per unit thrust, it is more appropriate to quantify the *energy* consumption per unit thrust. This leads to the thrust-specific energy consumption (TSEC), which is written as

$$\text{TSEC} = \frac{\dot{m}_{\text{fuel}} \text{LHV}}{F_{\text{thrust}}} = \text{TSFC} \times \text{LHV}, \quad (3)$$

where LHV is the lower heating value of the fuel (120 MJ/kg for hydrogen and 43 MJ/kg for kerosene).

The TSEC for hydrogen engines is about the same as the TSEC for kerosene engines, though hydrogen's unique combustion and heat sink qualities may enable small improvements in TSEC. Maniaci [130] lists TSEC values from a range of papers that compare hydrogen and kerosene engines. The percentage change in TSEC at takeoff relative to kerosene ranges from −0.59% to −6.21%, with an average of −2.85%. At cruise, the average change in TSEC is −0.81%, with values ranging from −3.65% to +0.95%. Verstraete [57] assumes a TSEC savings of 3% for hydrogen, which he attributes to the increased water vapor in the combustor exhaust. Mukhopadhyaya and Rutherford [58] hold TSEC constant between kerosene- and hydrogen-powered turboprop engines. Using the same TSEC is a reasonable conservative assumption for similar hydrogen and kerosene engine cycles.

Single-digit percent reductions in TSEC may be possible due to hydrogen's combustion properties [57,126]. There is a benefit from switching to hydrogen from kerosene due to increased water in the exhaust [57,127]. This water increases the exhaust's specific heat, which decreases the temperature and pressure changes across the turbine stages for a fixed power output (Boggia and Jackson [127] attribute this effect to a decrease in TSEC of 1.70% at takeoff and 2.76% in cruise). Further reductions in TSEC may be possible with modified engine cycles [128].

## 5.2. Fuel cells

A hydrogen fuel cell is a device that produces electricity from hydrogen and oxygen. Fuel cell propulsion architectures are usually proposed for small aircraft up to the size of a regional propeller aircraft (e.g., Dash 8 or ATR 72). Using a fuel cell avoids the costs and maintenance incurred by using turbomachinery. This is the architecture chosen by H2FLY's HY4 aircraft [131], Universal Hydrogen [48], and ZeroAvia [132]. Fuel cell propulsion architectures often use a battery to handle transient high-power requirements and rapid changes to throttle. Some architectures, including ZeroAvia's, supplement the fuel cell's power with batteries throughout the flight.

### 5.2.1. Fuel cell types

The most common fuel cell varieties considered for aircraft are polymer electrolyte membrane fuel cells (PEMFC), also known as proton exchange membrane, and solid-oxide fuel cells (SOFC) [133].

PEMFCs operate at low temperatures (30–100 °C [134]) and can start up and shut down in seconds. They also are the highest power density fuel cell type [111]. Careful humidification of the cell is critical to maintain adequate performance. A platinum catalyst is also required to speed up the chemical reaction (due to the low temperatures). PEMFCs have been a popular choice for transportation applications because of their portability and quick response times.

SOFCs operate at high temperatures (600–1000 °C [134]) and thus require some time to start up and shut down (at least 10 min and maybe an hour or more). One advantage of high-temperature operation is that the chemical reaction does not need a catalyst. Because the high temperatures enable the use of different materials, no humidification is necessary. SOFCs alone cannot surpass the power density of PEMFCs. However, if the high-temperature waste heat can be used productively (e.g., by generating power with a turbine or reforming hydrocarbon fuel), SOFCs may be a better choice.

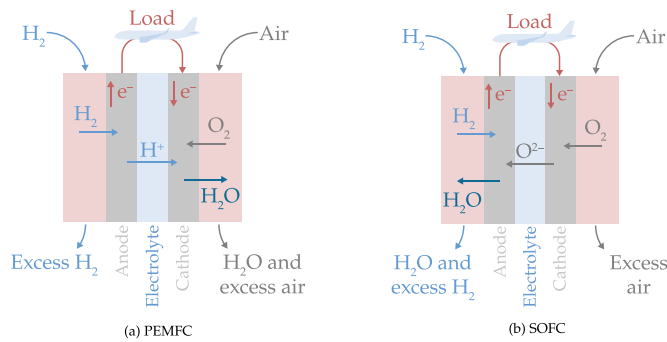


Fig. 5.4. In PEMFCs and SOFCs, hydrogen is consumed at the anode, and oxygen is consumed at the cathode, producing water.

### 5.2.2. Fundamental principles

Hydrogen fuel cells consume hydrogen at the negative electrode (anode), and oxygen at the positive electrode (cathode). The oxygen is usually drawn from the ambient air. Electrons from the hydrogen break off and flow through the circuit, powering the electric load. In a PEMFC, the positively-charged hydrogen ions flow through the electrolyte and meet up with oxygen and the electrons at the cathode, forming water. In an SOFC, the electrons meet the oxygen at the cathode, forming negatively-charged oxygen ions. These oxygen ions flow through the ceramic electrolyte back to the anode, where they meet with hydrogen ions and produce water. These two types of fuel cells are shown in Fig. 5.4.

Electrical current is directly proportional to the number of electrons flowing through the circuit. The faster the reaction in the fuel cell, the more current is produced. The reaction happens at the interface of the electrodes, electrolyte, and hydrogen or oxygen. A larger cell has more reaction sites and thus can produce more current. Therefore, it is common to normalize the current by the area of the cell, yielding the *current density*.

The electrical power produced is the product of the current and the voltage. The current is solely dependent on the reaction rate. The ideal voltage is dictated by thermodynamics—usually about 1 V per cell. The actual voltage is the ideal voltage minus three types of losses: activation losses, ohmic losses, and mass transport losses [111]. Each type of loss can be described as a function of current density. The curve of the actual voltage versus the current density is often called the *polarization curve* and is an essential tool for modeling fuel cell performance.

Activation losses, also called *activation overvoltage*, describe the voltage the chemical reaction uses to reduce the activation barrier. This voltage allows the chemical reaction to occur, but it reduces the fuel cell's usable voltage. In the high current density regime in which fuel cells usually operate, activation losses are described by the Tafel equation,  $A \log(j/j_0)$ , where  $A$  is a constant called the Tafel slope,  $j$  is the current density, and  $j_0$  is the exchange current density [134]. The exchange current density  $j_0$  represents the amount of electrons flowing between each cathode and the electrolyte at zero current density. In other words, it represents the amount of chemical activity at the electrodes when the fuel cell is not under load. A high  $j_0$  is desirable because more activity generates more current. One way to reduce the activation overvoltage (and increase  $j_0$ ) is to use catalysts. PEMFCs take this approach and use platinum as the catalyst. Another approach is to raise the operating temperature, which is how SOFCs work. A third is to make more reaction sites by using highly porous electrodes—all fuel cells do this. The Tafel equation suggests that activation losses approach negative infinity as current densities go to zero. This is not physical but can be avoided by modifying the Tafel equation to  $A \log((j + j_n)/j_0)$ , where  $j_n$  is the internal current density. Larminie and Dicks [134] give a typical value of 0.06 V for  $A$ , 0.04 mA/cm<sup>2</sup> for  $j_0$ , and 3 mA/cm<sup>2</sup> for  $j_n$  for a low-temperature cell.

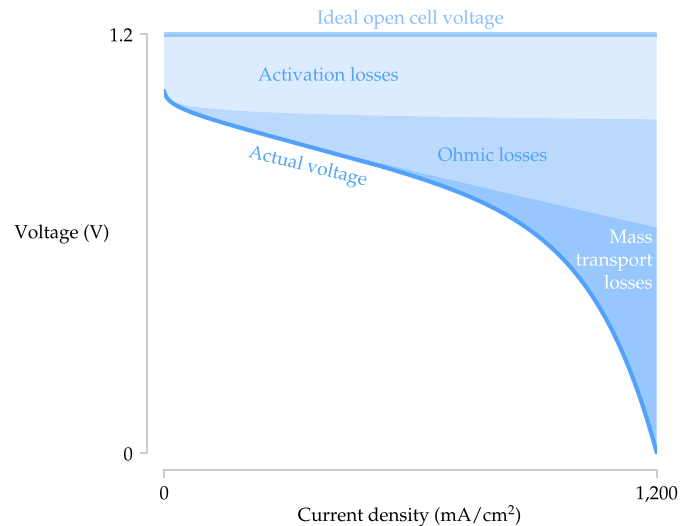


Fig. 5.5. Polarization curve for a fuel cell including the three sources of voltage loss. Source: Data from Laurencelle et al. [135].

Ohmic losses are a result of internal resistance in the fuel cell. These losses are called “ohmic” because they follow Ohm’s law ( $V = IR$ ). Therefore, the voltage reduction due to ohmic losses increases linearly with current, and thus also current density. While all fuel cell components contribute to these losses, the electrolyte is often the highest resistance part. The way to decrease electrolyte resistance is material-dependent, but generally, a thinner electrolyte has a lower resistance.

Mass transport losses, also called *concentration losses*, are caused by limitations on the rate at which reactants can reach the reaction sites. Depending on the fuel cell design, this limitation is dictated by the rate at which reactant gas can be pushed through the channels to the electrodes or the rate at which the reactants can diffuse through the electrodes to the reaction sites. This type of loss determines the cell’s maximum current density because it describes the maximum rate at which the reactants can be supplied. The mass transport losses can be described by  $c \ln(j_{\max}/(j_{\max} - j))$ , where  $c$  is a constant,  $j_{\max}$  is the maximum current density, and  $j$  is the current density [111]. An alternative way of modeling the mass transport losses uses the empirical equation  $m \exp(nj)$ , where  $m$  and  $n$  are constants determined by fitting experimental data [136]. Unlike the first equation, the empirical equation has no theoretical foundation. However, it fits experimental data closely and thus takes into account effects that are not captured by the theoretical equation, such as the movement of water in the electrodes.

Fig. 5.5 shows the combination of the three types of losses to determine the actual voltage at a given current density. There are three regions in the resulting polarization curve. At low current densities, the activation losses dominate. At moderate current densities, the activation losses flatten out, and the ohmic losses determine the shape of the polarization curve. Mass transport losses grow rapidly at high current densities and set the maximum current density.

The power produced by a single fuel cell is not enough for most applications, so cells are stacked in series. To stack cells, current must be carried from the anode of one cell to the cathode of the neighboring cell. However, it is still necessary to deliver hydrogen and oxygen evenly to the surface of the electrodes. This is the function of the bipolar plates, which are made of a conductive material and designed with channels to carry the reactants to the electrodes. Fig. 5.6 shows an arrangement of fuel cells in series separated by bipolar plates. The bipolar plates must be designed to perform all these functions while being as lightweight as possible.

Cooling this stack is challenging. To appreciate how much heat must be removed, consider battery-powered electric aircraft. The thermal

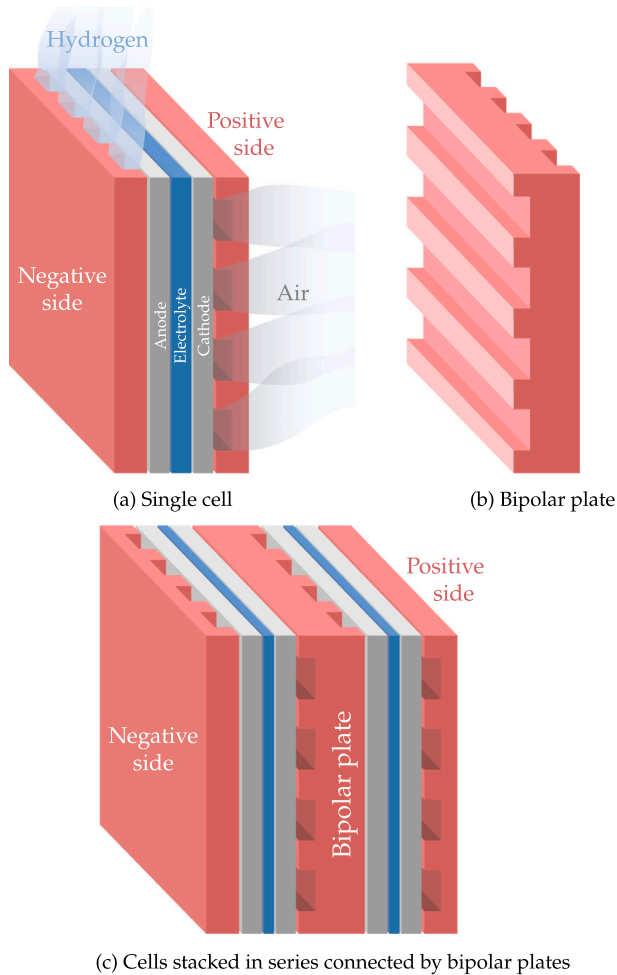


Fig. 5.6. To achieve enough power, individual fuel cells are arranged in series and separated by the bipolar plates. Many cells in series form the stack.

management of electrical components for battery-powered aircraft is a known challenge [16]. This is because their temperature limits are relatively low, and the heat produced by electrical components accumulates in their structure instead of being expelled in the exhaust like in a gas turbine. Low-temperature PEMFCs have the same problem but must reject at least one order of magnitude more heat than electric components. This is because the efficiency of fuel cells is about 50%, which is much lower than a typical 95% efficiency of electrical components.

Wilberforce et al. [137] and Baroutaji et al. [138] discuss a range of cooling approaches and how they can be implemented. Air cooling, liquid cooling, and phase change cooling are the most common approaches. For applications requiring more than a few kilowatts, such as aircraft, liquid and phase change cooling are often the best or only options because passive and air cooling cannot reject enough heat. Kösters et al. [139] suggest using active cooling with a heat pump in combination with a phase change coolant to reduce the cooling system weight and drag for a low-temperature PEMFC. They find savings in net thrust of 16% compared to a liquid-cooled version. The most common approach to cool the fuel cell stack is by adding coolant channels to the bipolar plates. Because bipolar plates have so many functions, they often make up the majority of the stack's volume and weight, and they are the target of substantial design effort. Their shape is optimized to deliver reactants to the electrodes, manage cooling, and limit weight; their material must be highly conductive and lightweight.

Like turbocharging in combustion engines, the specific power of fuel cells can be increased by operating at higher pressure. The power

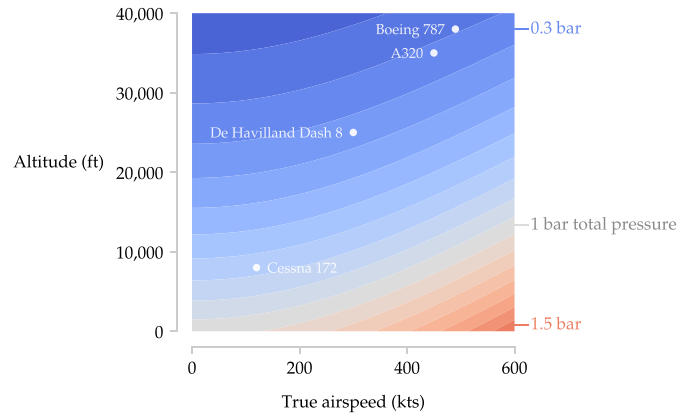


Fig. 5.7. Total pressure at a range of flight conditions in standard atmospheric conditions. Depending on the fuel cell's operating pressure, it may need substantial additional compression at higher altitudes.

increase is due to a reduction in the cathode activation overvoltage. The voltage increase is proportional to the logarithm of the pressure rise [134] (new operating pressure divided by original operating pressure, usually atmospheric). In other words, increasing operating pressure helps somewhat but eventually yields diminishing returns. Unlike turbocharged internal combustion engines, PEMFCs do not produce hot exhaust gas that can drive a compressor. Using a turbine to recover pressure from the PEMFC exhaust can still be worthwhile, but the recovered power alone cannot drive the compressor. Compressors for fuel cells must be powered by electricity produced by the fuel cell itself. The question now becomes whether the increase in the fuel cell's power is worth the power used by the compressor, the added weight, and the increased complexity. The answer depends on the fuel cell and the application. Schröder et al. [140] design a fuel cell to supply more than 300 kW of auxiliary power for a commercial aircraft and find that pressurizing the fuel cell to between 1.5 and 2.0 bar absolute pressure achieves the optimum overall system efficiency. Larminie and Dicks [134] provide a quantitative method to determine if incorporating a compressor may be worthwhile. For aircraft, the operating pressure is further complicated by the variation in total pressure at different altitudes and speeds (Fig. 5.7 shows total pressure at a range of flight conditions). Particularly for larger aircraft that operate in conditions with lower total pressure, fuel cell pressurization is likely beneficial or even necessary to improve fuel cells' specific power.

### 5.2.3. PEMFC operation

PEMFCs require humidification and water management. The electrolyte membrane is often made of Nafion, a polymer material that looks like plastic wrap and must be kept wet to conduct the positively-charged hydrogen ions efficiently. On the other hand, the electrodes must not become flooded by water, which clogs their carefully-crafted, porous structure.

This is further complicated by the reactions and forces that create and move water around the cell, illustrated in Fig. 5.8. In PEMFCs, water is created at the cathode. Water is also pushed from the anode toward the cathode (the wrong direction to hydrate the membrane) by electro-osmotic drag, a force created by the hydrogen ions moving across the electrolyte membrane. A handful of other forces, including diffusion, push water in the opposite direction [141].

The final complicating factor is that as the air moves across the cathode, it absorbs water and heat. If it absorbs a lot of water and little heat, the relative humidity may be nearly 100% by the time the air reaches the exit. If it absorbs much heat and not much water, the relative humidity may decrease substantially by the exit. Both extremes are undesirable because they result in too little or too much water being removed from the downstream portion of the cathode.



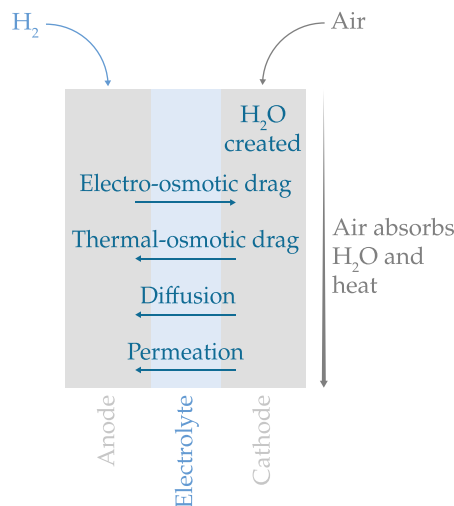


Fig. 5.8. Careful water management in PEMFCs is necessary to keep the electrolyte membrane hydrated without flooding the porous electrodes.

These effects can be controlled by adjusting the temperature and humidity of the gases being sent to the fuel cell stack. The amount of air flowing into the stack can also be changed. In practice, more air is blown through the stack than is necessary for the chemical reaction—partially for water management and potentially for thermal management. The fuel cell's designer also controls the operating pressure, which changes the amount of water required to achieve a given relative humidity.

As the fuel cell operates, nitrogen (from the air) and water travel to the anode. The build-up of nitrogen and water degrades the fuel cell performance [142]. Continued operation without clearing the nitrogen and water can permanently damage the fuel cell. Periodic purging of the anode compartment is essential to maintain the fuel cell's performance and lifetime. Unfortunately, purging wastes hydrogen. Thus, the selected purge time interval is a compromise between maintaining the fuel cell's performance by purging the impurities and avoiding hydrogen loss. A reasonable time interval between purges is in the order of minutes [143].

Small amounts of carbon monoxide exist in hydrogen produced from fossil fuels. This carbon monoxide can poison low-temperature PEMFCs [144]. Even very low amounts of carbon monoxide in the order of 10 ppm can permanently absorb onto the surface of the platinum catalyst, preventing the chemical reactions from occurring. To prevent this, the hydrogen fuel should have low carbon monoxide levels.

#### 5.2.4. SOFC operation

Solid oxide fuel cells operate at high temperatures of 600–1000 °C, which provides several benefits. The reaction occurs more readily at higher temperatures, which means that no precious metal catalyst is necessary. A greater temperature difference between the fuel cell and ambient air eases thermal management. Oxygen ions can be used as a charge carrier with a ceramic electrolyte, which requires no water management. Finally, the high-temperature waste heat can be useful. One commonly cited use for the waste heat is to reform fuel (either internally in the cell or externally), which in this case means converting hydrocarbon fuel to hydrogen (to be used by the fuel cell) and other products [111]. However, this does not apply when pure hydrogen is already stored onboard. Another use is with hybrid fuel cell and hydrogen-powered gas turbine propulsion architectures, where the fuel cell's heat preheats the air entering the combustor [145].

The high temperatures also introduce new challenges. SOFCs have long startup times and limited shutdowns in their lifetime [146]. Larger temperature changes on startup and shutdown introduce material and

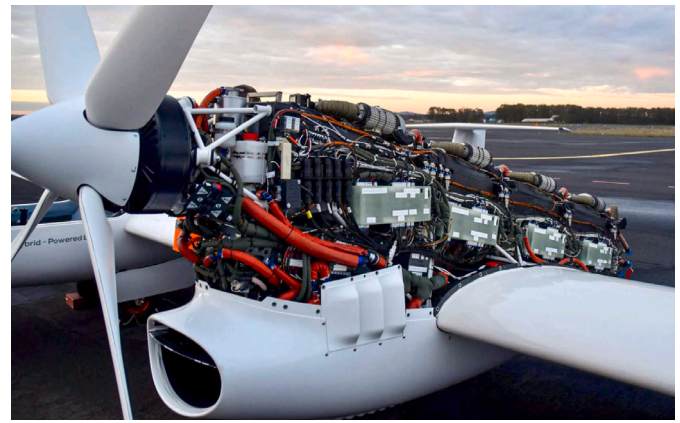


Fig. 5.9. The fuel cell's balance of the plant can be as heavy and large as the fuel cell stack itself. The fuel cell propulsion unit for H2FLY's HY4 aircraft includes a thermal management system, power conditioning, water management, and more (H2FLY GmbH image).

mechanical difficulties, including thermal expansion compatibility and sealing [111]. Additionally, the air and fuel must be preheated.

The materials and components required for SOFCs produce lower specific power than PEMFCs, but similar efficiencies. If the waste heat can be used effectively for fuel reforming or preheating air in a gas turbine hybrid architecture, SOFCs may be worthwhile; many SOFC and gas turbine hybrid architectures have been proposed [147]. Otherwise, PEMFCs are usually chosen because of their high specific power and quick startup.

#### 5.2.5. Balance of plant

As previously explained, fuel cell stack operation might require thermal management, pressurization, and humidification. Other processes might be required, such as electric power conditioning. Similarly to the tank auxiliary systems in Section 4.1, the components required to support the fuel cell's operation form the *balance of plant*. The balance of plant must be included when modeling the fuel cell system's mass, volume, pressure loss, and cost. In practice, the balance of plant can weigh at least as much as the fuel cell stack, if not more. Visually, the balance of plant often obscures the fuel cell, as shown in Fig. 5.9.

#### 5.2.6. Aircraft design considerations

An important distinction exists between a fuel cell's efficiency and power output. We define efficiency as the ratio of the electrical power produced by the stack to the rate at which energy (in the form of hydrogen) flows into the stack. In practice, the overall system efficiency may include other factors, such as the electricity supplied to the balance of plant's compression system. Nonetheless, the stack efficiency still gives a sense of the overall trends.

For intuition on stack efficiency, let us consider voltage and current. Electrical power (the numerator in the stack efficiency equation) is the product of the current and voltage. Current is directly proportional to the amount of fuel entering the stack because the reactant gases supply the electrons flowing through the circuit. This leaves voltage to determine the shape of the efficiency curve, so it should not be surprising that the efficiency is similar to the polarization curve.

As shown in Fig. 5.10, the efficiency decreases as the current density increases. On the other hand, the power (and specific power) increases as current density increases. These opposing effects introduce an interesting problem for aircraft designers [148]. Oversizing the fuel cell to operate at low current density reduces the necessary fuel weight because the fuel is used more efficiently [140,149]. However, this results in a larger, heavier, and more expensive fuel cell. Alternatively, sizing the fuel cell to operate at maximum specific power reduces the

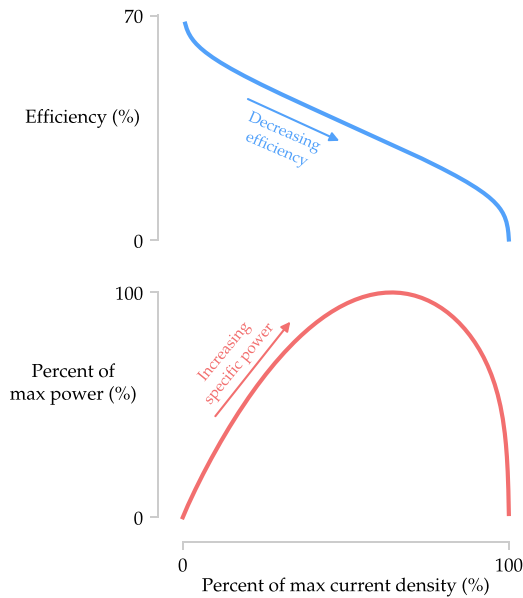


Fig. 5.10. Fuel cells are most efficient at low current densities but have the highest specific power at higher current densities. Designers must decide how to size the fuel cell to best balance the weight of the needed fuel and the weight of the fuel cell while meeting maximum thrust requirements.

fuel cell weight but increases the fuel required. The optimal balance between the fuel and fuel cell's volume, weight, and cost depends on the particular aircraft.

Unlike a gas turbine's power output, the power produced by a fuel cell is insensitive to altitude, assuming a compressor is used to maintain the absolute pressure of air flowing into the stack as altitude changes. However, the compressor requires more power as altitude increases and total pressure drops, which adds some altitude sensitivity. The thrust of a gas turbine engine decreases substantially with altitude, so top of climb is a common design point.<sup>6</sup> The reduced altitude sensitivity of fuel cells may impact the design points [149]. If the takeoff design point is what constrains the fuel cell power, there may be substantial extra power available at altitude compared to what a gas turbine would provide. This could be a benefit because the fuel cell could operate in the higher efficiency portion of its polarization curve. However, if the fuel cell is sized for top of climb, less power may be available at takeoff than a gas turbine would provide.

For fuel cell thermal management system design, knowing how the fuel cell's efficiency is measured is vital. The efficiency can be measured relative to hydrogen's lower heating value (LHV) or higher heating value (HHV). The LHV corresponds to the heat produced when hydrogen is combusted. The HHV is the LHV plus the heat generated when the water vapor from the combustion is condensed. This becomes relevant for fuel cells when the water vapor exhaust is manipulated. In some cases, the thermal management system rejects more heat than predicted by the LHV efficiency because additional energy can be extracted by condensing the exhausted water vapor.

Aircraft propulsion systems must respond to rapid throttle changes and achieve high thrust for brief periods. PEMFCs appear to have fast enough response times to serve this purpose [150]. However, a battery is often included to serve as a buffer and to enable higher transient peak power output [72,151,152]. With careful system design, it may be possible to remove the battery.

<sup>6</sup> Top of climb is the point where transport aircraft transition from climb to cruise. This point often sizes turbofan engines because their thrust decreases with altitude, and the aircraft is still heavy with fuel at this point.

Finally, there is a sentiment within the aircraft design community that fuel cells are suitable only for smaller aircraft. Most current hydrogen fuel cell concepts are for regional aircraft or smaller because of the fuel cells' low specific power and power density compared to conventional gas turbines. There is also a more significant thermal management challenge as the power requirements increase. White et al. [116] find that the thermal management system drag could be up to 10% of the total aircraft drag for their 737-sized concept. Thermal management has coupled effects on the aircraft and propulsion system design, so it should be considered early in the design process. Despite the challenges, it may be possible for fuel cells to achieve better performance than gas turbines, even for long-range aircraft, by taking advantage of fuel cells' high efficiency to reduce fuel weight. Research is underway on novel fuel cell concepts to replace current narrowbody aircraft [153] and to address the thermal management issues [116].

### 5.2.7. Recent developments

The growing interest in hydrogen as a solution for hard-to-decarbonize transportation sectors has spurred significant advancement in fuel cells, particularly PEMFCs. Bhatti et al. [154] give an estimate of technology parameters and costs of PEMFCs through 2050. The most commonly stated challenges of fuel cells are the high cost and low durability [141,155–157]. The cost of fuel cells is expected to decrease as mass production scales up. Researchers are developing cheaper and higher-performance membrane materials [141]. Bipolar plate material, durability, and channel geometry research is ongoing.

Toyota has invested in hydrogen technology for vehicles since the 1990s and is ramping up its efforts. For the Mirai fuel cell vehicle, Toyota developed a self-humidifying PEMFC to reduce weight and volume. The self-humidifying system supplies the reactant gases to the electrodes in opposite directions to promote internal water circulation and diffusion through the electrolyte. Additionally, they have developed new bipolar plate geometries to improve the flow of gases through the cell. These improvements, in combination with other optimizations, have allowed them to more than double their stack's power density and specific power to 3.1 kW/L and 2.0 kW/kg, respectively, and increase current density by a factor of 2.4 [158].

Another advancement poised to decrease the weight and size of PEMFCs is transitioning to high-temperature PEMFCs (HT-PEMFC) [159]. The thermal management system is a significant contributor to the size and weight of a PEMFC's balance of plant [155], so reducing its weight is critical to increasing specific power. Operating at higher temperatures simplifies the thermal management challenges by providing a larger temperature difference between the fuel cell and ambient air. Another benefit of HT-PEMFCs is that they are less sensitive to carbon monoxide poisoning. HT-PEMFCs' near-term challenge is the high weight of their fuel cell stack, but that is expected to improve with continued material and design research [154].

HyPoint Inc [160], owned by ZeroAvia, is developing an HT-PEMFC that operates in the 140–180 °C range. The higher operating temperature allows them to cool the fuel cell with air instead of liquid and use the same compressed air to feed the stack. Phosphoric acid is used instead of water in their electrolyte, which circumvents the need for water management. They claim that these advancements enable a 61% weight reduction, resulting in a specific power of 2 kW/kg including the balance of plant. They also quote a carbon monoxide tolerance in the order of a few percent, which is substantially higher than current low-temperature PEMFCs.

A handful of hydrogen fuel cell regional aircraft demonstrators are expected to fly in the coming years. H2FLY and Deutsche Aircraft are converting a Dornier 328 to a 40-seat hydrogen fuel cell propeller plane with a 1.5 MW hydrogen system set to fly in 2025 [161]. ZeroAvia is retrofitting a Do228 for certification in 2024 [162], with interest from Alaska Air [163] and United Airlines [164]. Universal Hydrogen is retrofitting existing turboprops with hydrogen-powered fuel cells and already has orders from airlines [165]. They aim to fly paying passengers by 2025. The German Aerospace Center (DLR) is developing 1.5 MW fuel cell systems for regional transport as well [166].

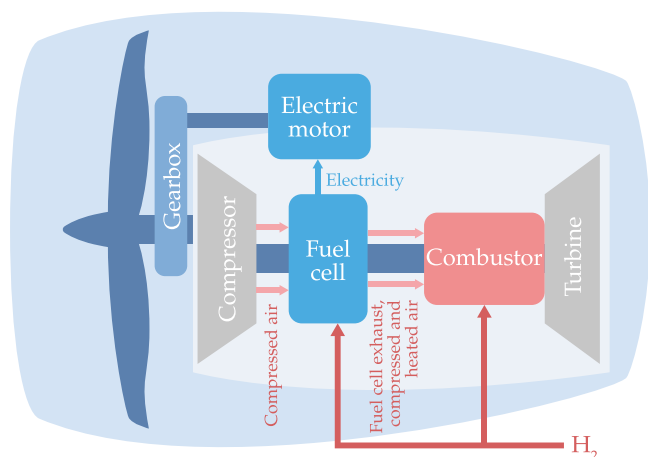


Fig. 5.11. A highly-integrated fuel cell and combustion hybrid propulsion architecture proposed by Bradley and Droney [168].

### 5.3. Hybrid

Hydrogen propulsion offers the same hybridization opportunities as battery-powered hybrid aircraft [16]. Adding a fuel cell enables more tightly-integrated hybrid architectures. Bradley [167] describes a range of possible architectures combining batteries, fuel cells, and gas turbines. A particularly novel architecture integrates a fuel cell with a hydrogen gas turbine, as shown in Fig. 5.11. The gas turbine's compressor pressurizes air used by the fuel cell, and the fuel cell's hot product gases are fed to the gas turbine's combustor, increasing thermal efficiency. This architecture was studied in the Subsonic Ultra Green Aircraft Research (SUGAR) program [168].

Waddington et al. [149] investigate a similar architecture with an SOFC system and small turbogenerator that combusts the remaining hydrogen exiting the fuel cell. They find that the low technology readiness level of SOFC systems relative to PEM fuel cells adds uncertainty to the specific power and performance of the solid oxide fuel cell. Their project targets zero  $\text{NO}_x$  emissions, which leads them to rule out SOFCs because the high temperatures produce  $\text{NO}_x$ . However, they mention that future SOFC systems may become a compelling technology for reducing aircraft energy costs.

Seitz et al. [113] explore another variation of the SOFC and gas turbine hybrid architecture that collects water vapor from the fuel cell exhaust and injects it into the gas turbine to improve efficiency and decrease  $\text{NO}_x$  emissions. Their system separates the fuel cell and gas turbine, so the fuel cell is not integrated into the gas turbine's engine cycle. The concepts by Bradley and Droney [168] and Waddington et al. [149] likely add water vapor to the combustor to some extent (unless they explicitly extract it) because there is water in the SOFC exhaust. However, Seitz et al. [113] focus specifically on the relationship between the amount of water vapor injected and the gas turbine's efficiency by varying the SOFC and gas turbine power split. They find a 7.1% decrease in block fuel burn and 62% decrease in  $\text{NO}_x$  compared to their turbofan-powered baseline aircraft.

It has also been proposed to replace the auxiliary power unit (APU) with a fuel cell. The Cryoplane project [56] mentions the option of using a fuel cell for the APU, which can provide electrical power in flight—it may be possible to power it with the boil-off gas from the  $\text{LH}_2$  tank, reducing the amount of fuel that must be vented. This could replace the need for electricity generation and hot bleed air from the gas turbine, allowing it to be downsized. Burger [169] investigates using a fuel cell as both an APU and additional tail propulsor.

Lastly, DLR is exploring a range of novel hybrid architectures [170]. One concept uses fuel cells for cruise and taxiing with gas turbines for takeoff and go-around conditions.

### 5.4. Additional considerations

Storing hydrogen as a liquid adds complexity to the fuel system, but it also offers possible synergies because the cryogenic fuel can be used as a heat sink. One idea for an electric propulsion architecture is to use the cryogenic fuel to cool electrical components, which could reduce drag from radiators in the thermal management system. Taking this idea further, the  $\text{LH}_2$  could be used to cool electrical components to the point that they are superconducting. The CHEETA program takes this approach, using the  $\text{LH}_2$  to cool superconducting electric motors, inverters, and transmission lines [115]. Airbus UpNext's ASCEND demonstrator program also aims to investigate superconducting electrical propulsion systems with  $\text{LH}_2$  [171]. Harnessing superconductivity would increase efficiency, system-level specific power, and power density of the electrical components.

## 6. Fuel system

Ultimately, both fuel cells and gas turbines consume gaseous hydrogen. If the fuel is stored as a cryogenic liquid, it must be converted from liquid to gas at some point. The point where the fuel is vaporized affects the design of the entire fuel system because it determines whether the fuel is moved within the aircraft as a gas or cryogenic liquid. Most concepts in the literature store the fuel as  $\text{LH}_2$  and burn it in a gas turbine (see Fig. 5.2). These designs use an  $\text{LH}_2$  fuel system and vaporize the fuel using heat generated by the gas turbine before it is combusted [9,129]. For fuel cells, a separate heat exchanger can be used to vaporize the fuel—this could use heat from a high-temperature fuel cell, such as an SOFC [84].

If the hydrogen is stored as a pressurized gas, the cryogenic challenges do not apply. Small uncrewed fuel cell aircraft that store hydrogen as  $\text{LH}_2$  often also use a  $\text{GH}_2$  fuel system that takes fuel from the tank's ullage [172,173]. A resistive heater in the  $\text{LH}_2$  tank generates more  $\text{GH}_2$  when the natural boil-off alone is insufficient.

Cryogenic liquid fuel systems are usually preferred over pressurized gaseous ones because of tank ullage pressure constraints [84]. During cruise, the natural boil-off will almost certainly be less than the fuel mass flow rate required by the engines. Therefore, if the engines were fed ullage gas, the ullage pressure would plummet. Because the density of  $\text{LH}_2$  is far greater than the density of the  $\text{GH}_2$  in the ullage, feeding the fuel system with the liquid results in a slower ullage pressure decrease for a given fuel mass flow rate. However, there may be configurations where pressurizing the ullage and using it to feed a gaseous fuel system makes more sense.

Whether the fuel system is liquid or gaseous, cryogenic fuel tanks require heaters to prevent the ullage pressure from reducing too much. When liquid is removed from the tank, the ullage volume increases. When ullage gas is drawn from the tank, the amount of  $\text{GH}_2$  in the ullage decreases while the ullage volume remains the same. In both cases, the boil-off caused by the tank's heat leak may not be sufficient to maintain the ullage pressure. Additional boil-off can be generated by adding heat to the tank.

Cryogenic liquid fuel systems must minimize the amount of boil-off in the fuel lines because liquid fuel systems can only handle so much vapor in the liquid [9]. These systems use insulated fuel lines to limit the heat entering the system. Fuel lines are usually vacuum-jacketed or foam-insulated [55]. Every component in an  $\text{LH}_2$  fuel system must be carefully designed to minimize the heat leak into the cryogenic fuel.

Because hydrogen has a wide flammability range and is prone to leaking due to its small molecular size, it is vital to incorporate leak detection into the fuel system [174]. Aircraft-specific hydrogen leak detection must be developed for future hydrogen aircraft [175].

Once the  $\text{LH}_2$  reaches the engine or fuel cell, it must be vaporized and likely heated. Both fuel cell and gas turbine aircraft have components that need cooling, such as the fuel cell stack, engine oil, turbine blades, or compressed cabin air. There is an opportunity to take





Fig. 7.1. Proposed tube-and-wing configurations store the hydrogen in the fuselage. The darker area of the fuselage shows the passenger cabin.

advantage of this relationship by designing a symbiotic system that reduces the thermal management system's drag compared to a design where the two systems are separate [129].

More technology development is necessary to enable these cryogenic fuel systems. The most cited challenge is the lack of cryogenic pumps suitable for aircraft [9,23,129,153,175]. The rocket industry has already addressed this challenge. However, cryogenic rocket pumps have different requirements: they have much shorter operating times (a few minutes for launch), shorter expected lifetimes, and higher flow rates. Aircraft applications demand pumps that can operate reliably for hours, have a lifetime of thousands or tens of thousands of hours, and handle the lower mass flow rates required by aircraft. Other cryogenic fuel system technologies also require further development, including valves, vents, seals, bearings, and methods for accurately controlling gaseous fuel lines.

## 7. Aircraft configuration

Hydrogen aircraft configurations differ from conventional aircraft designs because of the hydrogen storage requirements. Whether stored as a liquid or gas, hydrogen takes up at least four times more volume than kerosene for a given amount of energy. For  $\text{LH}_2$  storage, reducing the heat leak favors tank shapes with low surface area-to-volume ratios. Because of hydrogen's low volumetric energy density, limiting the weight and drag penalties of integrating hydrogen tanks into an aircraft configuration is vital.

Because wings have a high surface area-to-volume ratio, the tanks are usually placed elsewhere, and the wing is "dry". (One exception is Silverstein and Hall [5], who wanted to store the maximum possible amount of fuel to maximize range.) A dry wing no longer benefits from load alleviation due to fuel weight, probably resulting in a heavier design. Detailed aerostructural design considering all relevant load conditions and dynamic aeroelasticity would be necessary to design a dry wing with optimal trades between weight and drag.

For  $\text{GH}_2$  storage, long and thin pressure vessels that fit in large wings may be feasible. However,  $\text{GH}_2$  is proposed mainly for smaller aircraft (see Fig. 5.2), which have wings that may be too thin for wing-based storage to be effective. Lastly, current aircraft wings do not have the volume necessary to store enough hydrogen for long commercial flights [176].

### 7.1. Tube-and-wing

The most commonly proposed configurations involve integrating the tanks into the fuselage of a conventional tube-and-wing configuration. Fig. 7.1 shows a few examples of such configurations. Some configurations reserve the whole cross section in a portion of the fuselage for one or more tanks [7,32,49,50,112]. This approach offers the highest tank volume to surface area ratio because the tanks use the entire fuselage width. It also enables integral tank designs because the tank's outer surface conforms to the fuselage's outer surface.

For aircraft with a low fuel fraction (smaller aircraft with shorter range), it may be possible to employ this configuration with only a single fuselage tank behind the rear pressure bulkhead [56]. Trim and stability constraints force larger aircraft with this configuration to have both fore and aft tanks to limit the center-of-gravity movement. The forward tank is placed between the cabin and the cockpit. It is unclear whether regulations require pilot access to the cabin, so a cutout in

the forward tank may be necessary [57]. This configuration may not be suitable for narrowbody aircraft if access is required because their fuselage diameter is not large enough for a viable cutout [56].

Another possible tube-and-wing configuration places the  $\text{LH}_2$  tank above the fuselage along its length [177]. Because the tanks are longer and thinner, they require more insulation for a given amount of fuel. Furthermore, their walls cannot double as fuselage structure to make integral tanks. These factors incur a weight penalty, which results in degraded performance compared to the whole cross-section tank configuration. Troeltsch et al. [112] perform a trade study that compares the fuel consumption of a configuration that stores fuel in large tanks fore and aft of the cabin in the whole cross-section to one that stores fuel above the cabin, and also a combination of the two. The configuration with tanks at the front and rear of the cabin that fill the fuselage's cross-section has over 10% lower fuel burn.

While the over-cabin configuration has a performance penalty, it offers several safety benefits [176]. Placing tanks higher protects them from debris on landing and takeoff that could puncture the tank. They are also safer if a belly landing is necessary (e.g., if the landing gear fails to extend). Finally, positioning the tanks above the cabin and outside the pressure vessel increases the probability that leaks vent upward and away from the passenger cabin.

### 7.2. Unconventional configurations

Because hydrogen's onboard storage requirements differ significantly from kerosene's, the tube-and-wing configurations that are well suited to current kerosene aircraft may not be the best choice for hydrogen aircraft. The blended wing body (BWB) configuration [178–180], shown in Fig. 7.2, is the most promising among the unconventional designs, particularly for long-range missions [177,181]. The blending region between the cabin and the wings creates a large irregularly-shaped volume. Loading and storing cargo in this volume is impractical because of its shape. However, this volume may be convenient for storing hydrogen with a low drag penalty.

However, there are still questions about the BWB's viability. Designing a lightweight structure that can withstand cabin pressure loads is one of the most significant challenges. The PRSEUS project aimed to address this challenge with novel composite manufacturing techniques [182–184].

Other unconventional configurations that have been proposed include twin fuselages and podded wing tanks. However, these configurations tend to have inferior overall performance because of the increased drag [56,177].

## 8. Cost

Operating cost is a significant driver for the commercial aviation industry. Hydrogen aircraft change the cost in two ways: aircraft cost, including acquisition and maintenance, and fuel cost. Both categories are subject to high uncertainties. Accordingly, operating cost estimates compared to similar kerosene aircraft range from a slight decrease [55] to a 50% increase [23] or more, depending on the aircraft size, propulsion system, and technology assumptions.

Hydrogen aircraft acquisition cost will be higher than conventional aircraft because of the hydrogen storage tank and system integration. In addition, the first hydrogen aircraft must be priced to offset the higher research and development costs involved. Hoelzen et al. [185]



Fig. 7.2. Two potential arrangements for hydrogen tanks in a BWB configuration. The darker area shows the passenger cabin.

estimate a 12%–13% increase in the acquisition cost component of direct operating cost for short- and medium-range aircraft. Depending on their price, fuel cells may also increase the acquisition cost if used in the propulsion system.

The change in maintenance cost is also uncertain. There has been speculation that hydrogen turbomachinery has a longer life and requires less maintenance than their kerosene-powered counterparts because hydrogen burns more cleanly—Janić [186] and Brewer et al. [9] estimate a 25% longer engine life. On the other hand, maintenance costs could increase due to the complexity of operating and maintaining LH<sub>2</sub> tanks and fuel systems. Like all primary structures, the LH<sub>2</sub> tanks require regular inspection to ensure the insulation and structure are in adequate condition [187]. Safely defueling and purging the tanks for maintenance is an involved process [188,189].

The other significant influence on operating cost is the fuel, both in terms of how efficiently the aircraft uses the fuel and the fuel's unit cost. The change in fuel energy required compared to kerosene aircraft depends strongly on the tank gravimetric efficiency, as previously explained (see Fig. 4.1). Mukhopadhaya and Rutherford [58] estimate an energy usage increase of about 10% for hydrogen combustion turboprop and narrowbody aircraft with tank gravimetric efficiencies of 20%–35%. Verstraete [32] predicts a decrease in energy usage of 10% for a large long-range aircraft with a tank gravimetric efficiency of about 75% [87]. Brewer and Morris [7] compute energy usage somewhere between those two bounds, with lower energy for hydrogen as the range increases.

Switching to a fuel cell propulsion system is another way to change how efficiently the aircraft uses the fuel. Fuel cells' efficiency may be as much as twice a typical turboprop's thermal efficiency of 25–30% [140,154,190]. The greater efficiency means hydrogen fuel cell aircraft can consume less fuel (measured in terms of energy) than conventional turboprops. The lower energy consumption might be able to compensate for a higher cost of hydrogen than kerosene on a per-energy basis. This can make fuel cells a compelling option for regional hydrogen aircraft even at current technology levels.

Reducing the unit cost of hydrogen (the cost per kilogram) is critical for the competitiveness of hydrogen aircraft [83]. Hoelzen et al. [185] find that in an optimistic hydrogen cost scenario, the operating cost of short- and medium-range hydrogen aircraft would be similar to that of the kerosene-powered baseline. In a pessimistic hydrogen cost scenario, they find that operating costs would double.

The remainder of this section focuses on hydrogen's unit cost components. Most hydrogen aircraft concepts aim to reduce the climate impact of aviation. Accordingly, most of these concepts assume that the hydrogen is produced using electrolysis powered by renewable energy. Thus, this is the type of hydrogen discussed here.

Context is necessary to gain intuition on hydrogen prices. The price of a kilogram of hydrogen must be 90% of the price of a gallon of kerosene (or 3.4 times the price of a liter) to achieve the same cost per unit of energy. For kerosene priced at \$3/gal (\$0.79/L), hydrogen must be \$2.70/kg to be at cost parity on an energy basis.

A breakdown of the cost of each component of renewable LH<sub>2</sub> is shown in Fig. 8.1. Most of the cost of hydrogen by the time it is

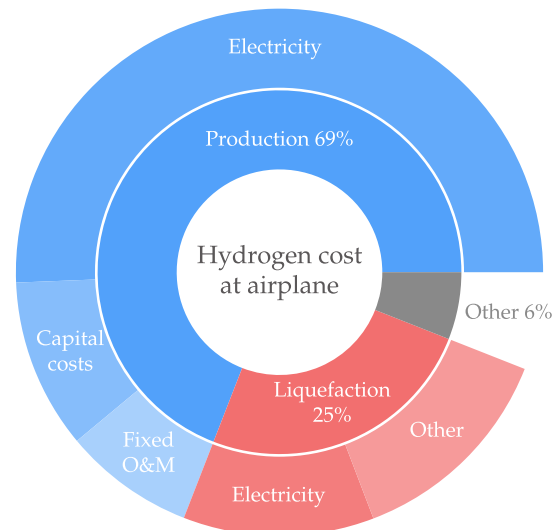


Fig. 8.1. Production is the most significant contributor to the total cost of LH<sub>2</sub>, followed by liquefaction. Both electrolysis and liquefaction costs are dominated by the electricity cost. Source: Data from Hoelzen et al. [185] and more detailed production data from Peterson et al. [191].

delivered to the airplane is the cost of producing it. The production of renewable hydrogen uses a large amount of renewable electricity to drive an electrolyzer, which is a fuel cell in reverse. Electrolyzers are 60%–80% efficient (measured by LHV), so about 1.5 MJ of electricity is required to make 1 MJ of hydrogen [192]. After electrolysis, the hydrogen is liquefied, requiring additional renewable electricity. The hydrogen must also be transported to the airport, stored, and transferred to the aircraft. The production of LH<sub>2</sub> is roughly two-thirds of the final hydrogen cost at the airplane [23,193]. The dominant cost in both electrolysis and liquefaction is the cost of electricity.

As renewable energy resources scale up, their cost is expected to decrease [194]. These resources are also required for electrifying other industries and replacing current fossil fuel electricity generation. There has been some discussion of using electricity in off-peak hours to generate hydrogen [195]. Engineers are looking into using excess energy generated by offshore wind farms to produce hydrogen for selling and smoothing energy production [196,197].

The decreasing cost of hydrogen produced with electrolysis hinges on scaling up hydrogen production volumes and achieving high equipment utilization rates. Increasing the scale of electrolyzer manufacturing enables cost reductions by taking advantage of economies of scale [198]. Increased electrolyzer utilization spreads the capital cost of purchasing the electrolyzer over more hydrogen, which reduces the hydrogen's cost per kilogram [192]. The same principle applies to other equipment, such as liquefaction facilities. In reality, there are times of day when electricity is expensive because of high demand. The

increased electrolyzer utilization from producing hydrogen with this expensive electricity does not outweigh the higher electricity cost, so optimal utilizations are below 100% of the time [199].

Several government-funded projects have sought to reduce the cost of hydrogen. In June 2021, the United States Department of Energy launched the Hydrogen Shot program, which aims to reduce the cost of clean hydrogen to \$1/kg within a decade [200]. The announcement is vague about what counts as “clean” and how the cost of hydrogen is measured (whether it is only the production cost or the final cost to the consumer, and if it is in gas or liquid form). However, it represents a government intent to spur cost reduction. Mukhopadhyaya and Rutherford [58] and Zhou and Searle [201] estimate 2035 and 2050 hydrogen prices to be much higher than \$1/kg—roughly between \$2 and \$7 per kilogram. Their more conservative estimates are for the low-volume production of automotive hydrogen refueling stations, and they consider the cost of hydrogen delivered to the consumer (not just production). The European Union also has a slew of projects to reduce the cost of hydrogen, including the REPowerEU Plan [202] and H2FUTURE [203].

The infrastructure for hydrogen production and distribution to aircraft must be developed from the ground up. Several configurations for this infrastructure are possible.  $\text{LH}_2$  could be delivered directly to airports by trucks or pipelines. Alternatively, airports could be supplied with  $\text{GH}_2$  that would be liquefied on-site. Finally, hydrogen could be produced at the airport. Postma-Kurlanc et al. [204] estimate that the infrastructure for a large airport will cost hundreds of millions to billions of dollars, depending on the chosen configuration. Other infrastructure strategies are also being pursued. Universal Hydrogen plans to deliver filled hydrogen tanks directly to aircraft and swap them with empty ones. This way, the tank becomes both the distribution system and the onboard storage.

## 9. Safety and certification

From a safety point of view, hydrogen has advantages and disadvantages. If  $\text{LH}_2$  is spilled, it rapidly vaporizes. The gaseous hydrogen then quickly rises due to its low density and dissipates into the atmosphere, reducing the fire hazard [55]. Hydrogen fires are hotter than kerosene's, but because hydrogen does not pool, it does not result in long-lasting fires on the ground like kerosene [205]. This means that the thermal radiation dose from exposure to a kerosene fire can quickly surpass the radiation from a hydrogen fire because of its longer duration, despite the kerosene fire's lower temperature. When Lockheed's Skunk Works was developing the hydrogen-powered CL-400 Suntan, engineers concluded that hydrogen could be handled quite safely [4]. They found it more challenging than expected to induce hydrogen to explode. When it did ignite, the hydrogen fire would quickly dissipate and do less damage than a similar gasoline fire.

However, hydrogen introduces material- and handling-related safety concerns [206]. As discussed in Section 4, hydrogen can permeate and embrittle materials. Material properties also change when cooled to cryogenic temperatures. Sensors, material monitoring techniques, and maintenance procedures must be developed for the hydrogen tank and fuel system so that the aircraft is reliable and safe. Hydrogen is prone to leaking, and its wide flammability range means it could ignite at a wide range of concentrations. These properties make careful handling of hydrogen critical for safety. Hydrogen leak detection and prevention are critical to avoid these flammable scenarios. Engineers must also design the fuel tank and fuel system to keep oxygen from entering, which could create a flammable mixture. This involves constantly maintaining fuel tanks at a pressure higher than ambient to prevent air from entering. Reducing the number of ignition sources as much as possible is vital to reduce the probability that the hydrogen ignites if there is a leak.

In terms of certification, it appears that there are no significant barriers that would prevent a hydrogen aircraft from being certified [189].

The most significant unknowns are future hydrogen storage and distribution regulations. Nangia and Hyde [207] take a conservative perspective, suggesting that the hydrogen storage must be far from the passengers. They believe integrating the tank into the fuselage will not be possible from a safety standpoint. Because no hydrogen aircraft has been certified, questions remain about the requirements. New regulations that apply specifically to hydrogen aircraft systems may be established in the coming years.

In 2017, the Federal Aviation Administration's (FAA) Energy Supply Device Aviation Rulemaking Committee published a report with findings and recommendations for airworthiness standards of hydrogen fuel cells on transport aircraft [208]. The report provides insights into potential future regulatory measures for hydrogen aircraft. The committee recommends to the FAA that hydrogen tanks and fuel lines must be “(1) protected from unsafe temperatures; and (2) located where the probability and hazards of rupture in a crash landing are minimized”. It also recommends that fuel lines in the fuselage be “designed and installed to allow a reasonable degree of deformation and stretching without leakage where its leakage could introduce a hazard”. They suggest that “hydrogen leakage detection must be installed in any area of the airplane where hydrogen may accumulate and create a hazardous condition”. The potential influence of these recommendations on the aircraft configuration is unclear.

## 10. Climate impact

Reducing the environmental impact of commercial aviation is one of the primary motivations for hydrogen aircraft. Therefore, it is crucial to evaluate the achievable reduction in impact. We focus on three components of life cycle impact that differ from conventional aircraft: hydrogen production, hydrogen transportation, and aircraft emissions. These make up most of the so-called *well-to-wake* emissions.

We must first discuss how climate impact is measured. Conclusions can vary widely depending on the metric used because different climate forcers have different time scales. *Climate forcers* are substances, such as carbon dioxide, that affect the warming or cooling of the Earth's climate. Fig. 10.1 shows the drastic difference in warming behavior between the same emission amount of two climate forcers. The warming from the emission of a long-lived climate forcer, such as carbon dioxide, follows the *cumulative* amount emitted. On the other hand, the warming from the emission of a short-lived climate forcer, such as methane or contrails, tracks the *emission rate*. To stabilize warming, long-lived climate forcer emissions must be driven to zero, while short-lived climate forcers require only constant emissions.

Different metrics exist to quantify these warming effects. *Radiative forcing* (RF) quantifies the warming effect from the emission of a climate forcer at one instance in time and is sensitive to the amount emitted. Radiation from the sun enters Earth's atmosphere and thermal radiation from the Earth exits. Radiative forcing quantifies the net change to this radiation balance from the emission of a climate forcer. It is an instantaneous and globally-averaged measurement.

*Effective radiative forcing* (ERF) is a modified version of RF that correlates better with the Earth's surface temperature changes. It describes the radiation imbalance after secondary effects (e.g., clouds) have adjusted to the emission.

*Global warming potential* (GWP) measures the total radiative forcing from a one-ton emission of a climate forcer integrated over a specified period relative to the same value for  $\text{CO}_2$ . The most commonly used period is 100 years (called  $\text{GWP}_{100}$ ). This metric is useful for comparing the climate impact of different climate forcers. However, it may not correctly weigh the effects of different climate forcers if minimizing peak warming is the objective [210].



**Table 10.1**

Hydrogen production methods listed from least to greatest climate impact.

Color	Source
Green	Electrolysis powered by renewable energy
Pink	Electrolysis powered by nuclear energy (also known as <i>purple</i> )
Blue	Steam methane reforming with carbon capture and storage
Gray	Steam methane reforming
Brown	Coal gasification (also known as <i>black</i> )

### 10.1. Production

Hydrogen can be produced using various methods. Colors are assigned to the most common methods, listed in Table 10.1. The total impact of production methods ranges from near-zero climate impact (green and pink) to higher impact than continued fossil fuel use (brown). Thus, it is essential to consider the source of hydrogen when evaluating the climate impact of hydrogen aircraft.

Using green hydrogen is the ultimate goal for most proposals because it theoretically has zero climate impact. In practice, some renewable energy sources, photovoltaic solar in particular, still emit greenhouse gases when manufactured. Green hydrogen is currently prohibitively expensive compared to other production methods. As discussed in Section 8, most of that cost is from the consumed electricity. However, as the cost of renewable energy decreases and electrolyzer use scales up, green hydrogen costs decrease. Current state-of-the-art electrolyzers convert 70% of the electric energy into the equivalent in hydrogen energy [23]. Further technology improvements may increase this efficiency to 80% or more [211]. Government investments, incentives, and regulations are likely necessary to make green hydrogen-powered aircraft cost-competitive, particularly in the short term [58].

Nearly 80% of hydrogen produced in 2020 is gray or brown, and almost all the rest is a byproduct of other industrial processes [212]. Using gray or brown hydrogen is not an effective way of reducing climate impact and may be more damaging than fossil fuels.

Blue hydrogen is frequently touted as another low-carbon hydrogen source. However, researchers are unsure of its ability to reduce climate impact compared to gray hydrogen. Blue hydrogen also prolongs society's dependence on methane (natural gas) as an energy source. The most significant concern with blue hydrogen is fugitive methane emissions. These emissions could be pipeline leaks or intentional methane

venting. Methane is a potent greenhouse gas, so fugitive emissions may overshadow the climate impact reduction of using carbon capture. Blue hydrogen climate impact estimates range from an 85% to 9% reduction in CO<sub>2</sub> equivalent emissions relative to gray hydrogen [213–215].


### 10.2. Transportation

As we know from Section 4, hydrogen's small molecules make it prone to leaking. This is an existing problem with the natural gas infrastructure (discussed briefly in Section 10.1). If the hydrogen is transported as a liquid, some venting may also be necessary as the LH<sub>2</sub> boils off to avoid exceeding pressure limits.

Hydrogen is not a greenhouse gas; it does not directly interact with the radiation entering or leaving Earth's atmosphere [216]. However, its presence in the atmosphere affects the behavior of other greenhouse gases. Increased hydrogen concentration increases the lifetime of methane, the amount of water vapor in the upper stratosphere, and the concentration of ozone in the troposphere. Derwent et al. [217] estimate the GWP<sub>100</sub> of hydrogen to be  $5 \pm 1$ . However, they do not include the effects of H<sub>2</sub> emissions on stratospheric water vapor. When those are considered, the GWP<sub>100</sub> increases to  $11 \pm 5$  [218]. Research quantifying the effects of direct hydrogen emission is limited, so uncertainties remain.

Warwick et al. [218] estimate leakage rates between 1 and 10% of the hydrogen produced. Assuming a lower leakage rate, the climate impact relative to the impact from hydrogen production and consumption would be low [217,219]. However, the climate impact of a higher leakage rate could be significant. Combusting fossil fuel also emits hydrogen, so reducing fossil fuel use offsets some of the hydrogen leakage and venting emissions [218,220]. A leakage rate approaching 10% is unlikely because it would be expensive and unsafe [218].

Transporting the hydrogen in its pure form is not the only option. Another approach is to convert the hydrogen into ammonia for transport and convert it back to hydrogen at its destination. Ammonia is already widely distributed as a fertilizer for agriculture. It is liquid at room temperature and only 10 bar, simplifying handling. Transporting hydrogen via ammonia would enable using existing ammonia distribution by pipeline, ship, rail, and truck [221], circumventing the need for an entirely new hydrogen distribution infrastructure. However, the energy losses from the chemical conversions required by this transportation approach may make it uncompetitive [222]. Furthermore, ammonia damages ecosystems through acidification and

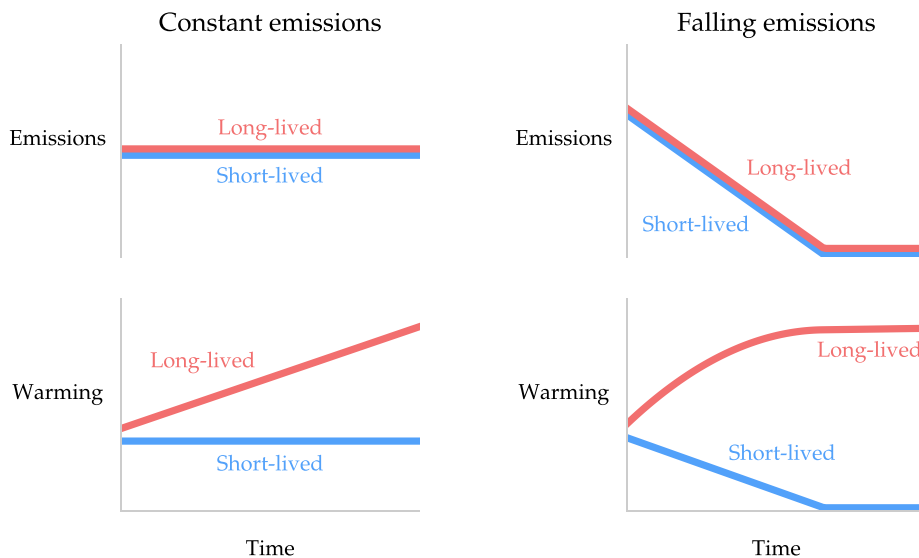

**Fig. 10.1.** Warming from an emission depends on the climate forcer's lifetime.  
Source: Adapted from Allen et al. [209].

eutrophication [223], and poses a risk to human health when released into the atmosphere [224]. These problems could be exacerbated if the ammonia distribution network was expanded.

### 10.3. Aircraft emissions

The climate impact of conventional aircraft is dominated by carbon dioxide ( $\text{CO}_2$ ), nitrogen oxides ( $\text{NO}_x$ ), and contrails [186]. Carbon dioxide is a long-lived climate forcer and the most influential human emission contributing to climate change [225].  $\text{NO}_x$  is produced by high-temperature reactions, such as reactions in gas turbines and SOFCs. It impacts warming indirectly by affecting other greenhouse gas behavior.

Water vapor and other particles emitted by engines form contrails, which may be aviation's most significant impact on the climate. Soot and sulfur emissions contribute to aviation's climate impact, but their effect is much smaller than those already mentioned. Soot emissions have a climate warming effect, sulfur and sulfate aerosols have a cooling effect, and both affect contrail formation. Fig. 10.2 shows the estimated contribution of each emission on radiative forcing in 2018.

Hydrogen aircraft development is motivated by the desire to drastically reduce aviation's climate impact. However, minimizing climate impact is rarely an objective in commercial aircraft design. Instead, airframers aim to minimize a combination of aircraft acquisition and operating costs. Proesmans and Vos [226] design climate- and cost-optimized medium-range narrowbody aircraft and show the difference between the two. They find that optimizing a kerosene aircraft for minimal climate impact increases the cash operating cost by 7% compared to the cost-optimized design. For the hydrogen aircraft, this value increases to 15%, primarily because of a decrease in cruise altitude to reduce contrail formation. Nonetheless, the cost-optimized hydrogen aircraft reduces climate impact by 71% compared to the cost-optimized kerosene aircraft.

In the following subsections, we describe how each major climate forcer from conventional aircraft changes when switching to hydrogen propulsion.  $\text{CO}_2$  emissions are eliminated, and  $\text{NO}_x$  emissions may be reduced or eliminated. The behavior and properties of contrails change when switching from kerosene to hydrogen propulsion. Some predict these changes would result in a lower climate impact from contrails than conventional aircraft, but significant uncertainties remain.

#### 10.3.1. Carbon dioxide

Because there is no carbon in the fuel, hydrogen aircraft do not emit  $\text{CO}_2$ . Eliminating carbon dioxide emissions would be a significant breakthrough because  $\text{CO}_2$ 's long lifetime means its effects on the

climate persist for millennia [227]. From a climate perspective, eliminating  $\text{CO}_2$  emissions is the greatest motivation for hydrogen aircraft. The absence of carbon or sulfur in the fuel also means that hydrogen aircraft produce no soot or sulfur emissions.

#### 10.3.2. Nitrogen oxides

$\text{NO}_x$  is currently aviation's most significant climate forcer after contrail cirrus and carbon dioxide. It is an *indirect greenhouse gas* because it contributes to warming only through its effect on other gases [227].  $\text{NO}_x$  produces ozone, which is a greenhouse gas.  $\text{NO}_x$  also reduces the lifetime and concentration of methane. Methane is a greenhouse gas, so reducing its lifetime in the atmosphere has a cooling effect. The warming from increased ozone outweighs the cooling from the effects on methane, resulting in a net warming effect.

Fuel cells produce virtually no  $\text{NO}_x$  [111], though higher temperature ones, such as SOFCs, do produce some. Hydrogen combustion engines emit  $\text{NO}_x$ , but the amount may be reduced by taking advantage of hydrogen's combustion properties, as discussed in Section 5.1. Considering  $\text{NO}_x$  emissions in the combustor design is critical if aviation's climate impact is to be reduced.

#### 10.3.3. Contrails

Contrails and associated contrail cirrus clouds are the greatest unknown and potentially the most significant contributor to the climate impact of hydrogen aircraft. These and other cloud effects are collectively known as aircraft-induced cloudiness (AIC). Their impact is short-lived, lasting at most 10s of hours [228]. These cloud formations reflect short-wave solar radiation into space during the day, which has a cooling effect. On the other hand, they prevent some long-wave thermal radiation emitted by the Earth from making it out of the atmosphere. This results in a net warming effect of AIC [229].

Contrails form when hot aircraft exhaust containing water vapor cools, causing the air to become saturated. Beyond the saturation point, the remaining water vapor freezes, forming small ice crystals. Soot and other particles in the exhaust act as nucleation sites for the formation of ice crystals. Contrail formation requires additional moisture to be available after the local relative humidity has reached 100%. A contrail is produced when the remaining moisture freezes into ice crystals. The Schmidt–Appleman criterion describes the threshold temperature below which these conditions are met based on the ambient conditions and engine exhaust properties [230–232]. The ambient humidity determines how long the contrail lasts. If the ambient air is not supersaturated with respect to ice, turbulent mixing dissipates the contrails (see Fig. 10.3). If it is, contrails can persist for hours. Much of the water content in persistent contrails comes from the surrounding atmosphere rather than from the water vapor in the engine exhaust. Schumann et al. [233] predict that the median mass of water in persistent contrails is in the order of 1,000 times greater than the mass of water initially emitted by the aircraft.

Contrails can spread from their original linear shape into contrail cirrus clouds indistinguishable from natural cirrus clouds, wispy high-altitude clouds made of ice crystals. Burkhardt and Kärcher [228] estimate that the radiative forcing from contrail cirrus is nine times greater than from linear contrails alone. This would make them the most significant element in the total radiative forcing from aviation.

Only in the past couple of decades have atmospheric scientists uncovered the significant climate impact of contrail cirrus. Contrails were mentioned only once in the Second Assessment Report [234] released in 1995 by the Intergovernmental Panel on Climate Change (IPCC). Linear contrails received more attention in the IPCC's Third Assessment Report [235], released in 2001. Scientists realized that cirrus cloud coverage was greater and more frequent in locations with high air traffic [236,237]. They also discovered thin layers of ice crystals high in the atmosphere that could contribute to warming and might be due to contrails [238]. At the time, the contribution of these phenomena to radiative forcing was poorly understood. By the IPCC's

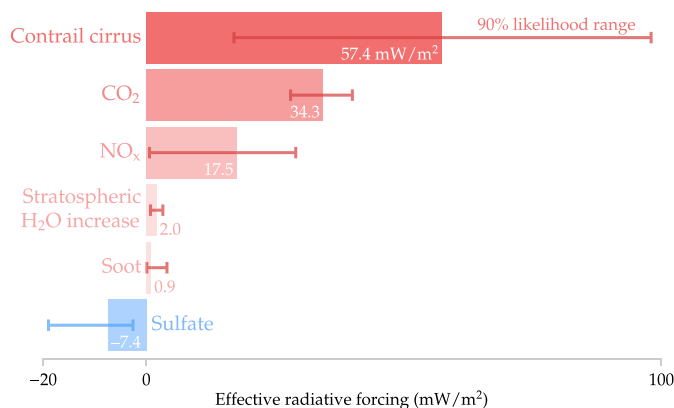


Fig. 10.2. Global aviation's effective radiative forcing in 2018 was dominated by contrail cirrus,  $\text{CO}_2$ , and  $\text{NO}_x$  emissions (data from Lee et al. [3]). Soot and sulfate emissions may also impact cloud formation, but the values are highly uncertain.



Fig. 10.3. Larger ice particles in contrails fall on average 700 m [233] to altitudes where they sublime back into water vapor. Other particles disappear once atmospheric mixing moves them to locations with lower humidity. The larger falling ice crystals can be seen in this photo as streaks directly below the linear contrail (first author's photo).

Sixth Assessment Report [239] in 2021, researchers predicted that the combined effect of contrails and aviation-induced cirrus was the most significant contributor to aviation's effective radiative forcing, albeit still with low confidence.

Uncertainty remains about the climate effects of contrails. Contrail cirrus and natural cirrus clouds appear identical, and some contrail cirrus are so thin that they cannot be detected by satellites or from the ground [228]. These factors make it challenging to quantify their effects by observation. To quantify contrails' impact, most researchers use meteorological data to predict when they will form. Recall that contrail formation and persistence depend on atmospheric temperature and humidity. Temperature data is reliable, but obtaining accurate humidity data is more challenging. By comparing the combined meteorological data to data from radiosondes, Agarwal et al. [240] show that models may overestimate the radiative forcing from persistent contrails by 100%–250% because the meteorological data often overpredicts the humidity. This results in an overprediction of the persistence of contrails.

Finally, contrails have secondary effects that are challenging to quantify. As previously mentioned, most of the water in persistent contrails is taken from the surrounding atmosphere rather than the engine exhaust. The lower humidity results in thinner contrails with higher mean age and suppresses the formation of natural cirrus clouds [233]. This tends to partially offset warming from aircraft-induced cloudiness. Another secondary effect is from soot, which provides nucleation sites for cirrus clouds [241]. This can cause cirrus clouds to form before they would occur naturally. These effects can have either a warming or cooling effect, depending on the atmospheric conditions [242].

Hydrogen combustion in a turbofan changes the contrail equation in two ways. Firstly, using hydrogen produces 2.6 times more water than kerosene per unit of energy consumption. Secondly, hydrogen produces no soot or sulfate aerosols. The increased water vapor emissions cause contrails to form more frequently. Schumann [232] estimates that the threshold temperature below which contrails form is 10 K higher for hydrogen aircraft than for conventional kerosene aircraft. This causes contrails to form at a wider range of altitudes. In 1957, NASA flew a B-57 aircraft with one of the two engines modified to burn hydrogen. The pilots observed that the hydrogen-burning engine produced contrails when the kerosene-powered engine did not [4].

The climate impact of increased contrail formation frequency of hydrogen aircraft is counteracted by the absence of soot and other particles in the exhaust. Eliminating soot and particle emissions leads to fewer, larger ice crystals [232,243–245]. The contrails made up of these larger ice crystals have a smaller optical depth and shorter lifetime, reducing their warming effect. Ponater et al. [246] estimate

that the changes from eliminating soot outweigh the increased formation frequency from increased water vapor emission, reducing the radiative forcing from contrails compared to conventional aircraft. Eliminating soot emissions would also remove the artificial nucleation sites produced by today's aircraft that cause natural cirrus clouds to form before they otherwise would.

Fuel cells may produce no contrails or contrails with a higher impact than those from turbofans, depending on how the propulsion system is designed and operated. Without processing the fuel cell's exhaust, Gierens [247] estimates that fuel cells produce contrails more frequently than hydrogen combustion engines. This is because they produce a large amount of water vapor emissions, and the exhaust's static temperature can be low. Similarly to hydrogen combustion engines, the contrails from fuel cell propulsion are expected to have a smaller optical depth and decreased lifetime compared to those generated by kerosene engines. Unlike a turbofan, a fuel cell's exhaust does not generate thrust. This means the performance penalty of extracting water from the exhaust is lower than for turbofans. Universal Hydrogen has mentioned that it is possible to reduce contrail formation by storing the water vapor emissions and releasing them when onboard atmospheric sensors detect that persistent contrails are less likely to form [248]. However, collecting and storing the water onboard would quickly increase the aircraft weight because the mass flow rate of water produced is nine times the mass flow rate of hydrogen consumed.

In the future, the climate impact of contrails could be reduced by adjusting the cruise altitude or route of flights [249]. This would require more advanced air traffic management and better atmospheric modeling to predict contrail formation. If this strategy was used for kerosene aircraft, they would burn more fuel when cruising at suboptimal altitudes, emitting more CO<sub>2</sub>. The benefits of reducing a short-lived climate forcer (contrails) at the cost of increasing a long-lived climate forcer (CO<sub>2</sub>) are disputed. Because hydrogen aircraft do not emit CO<sub>2</sub>, there is a greater incentive to optimize hydrogen aircraft operations to reduce contrails.

Research is ongoing to understand the formation and climate impact of aircraft-induced cloudiness, including experimental contrail measurements at altitude. The ML-CIRRUS project in Germany instrumented a Gulfstream 550 aircraft to study the properties and behavior of cirrus clouds [250]. Data collected during the project helped scientists validate their models and better understand the climate effects of contrail cirrus clouds. Airbus UpNext announced the Blue Condor program in partnership with DLR to measure the contrail properties of hydrogen-burning and kerosene-burning turbojet engines using a chase aircraft [251].

#### 10.3.4. Other emissions

The water vapor that does not form contrails is only a minor contribution to the climate impact [227]. Its effect is negligible when emitted below 8–10 km, where clouds and precipitation occur. Above that, its warming effect is still small but not negligible because the background water vapor concentration is lower.

Most hydrogen aircraft concepts do not vent H<sub>2</sub> during the flight, but it may be necessary sometimes. As discussed in Section 10.2, hydrogen indirectly affects greenhouse gases, which results in net warming. However, this effect is likely negligible if venting hydrogen is avoided.

## 11. Conclusions

Hydrogen-powered aircraft are a proposed solution to sustain the civil aviation industry in an environmentally-responsible way. Many researchers and engineers consider them the most viable long-term alternative to kerosene-powered aircraft. Hydrogen aircraft are not necessarily restricted to long-term ambitions. H2FLY and Deutsche Aircraft, Universal Hydrogen, and ZeroAvia are pursuing hydrogen-powered regional propeller aircraft to fly passengers by the end of this decade.

Hydrogen aircraft require much more research and development, but there appears to be a path to technological feasibility.

One of the most significant technological challenges is storing and handling hydrogen onboard. Compressed  $\text{GH}_2$  storage may be sufficient for small aircraft, but  $\text{LH}_2$  is crucial for long-range aircraft to limit the tank volume and weight. For tank gravimetric efficiencies greater than about 55%, which are possible with  $\text{LH}_2$ , we estimate that hydrogen aircraft energy consumption decreases relative to kerosene aircraft as the mission range increases. Although  $\text{LH}_2$  tanks are routinely used in rockets, tanks for aircraft need longer lifetimes and lower boil-off rates. In addition, aircraft fuel systems must handle lower mass flow rates and more cycles than rocket fuel systems. In the long term, vacuum-insulated  $\text{LH}_2$  tanks might be the most effective hydrogen storage solution for aircraft. Research efforts should focus on reducing their weight with new materials, designs, and manufacturing techniques. Integral tanks are another way to reduce the weight of onboard hydrogen storage. Conformal tanks might be advantageous if the weight penalty is outweighed by airframe drag reduction.

Hydrogen aircraft can use conventional gas turbines for propulsion. Advanced gas turbines convert fuel to mechanical work at efficiencies of around 40%. Using gas turbines leverages existing knowledge, design tools, and manufacturing techniques. A combustor designed for hydrogen's thermal and combustion properties is the only substantial change to the turbomachinery. The thrust-specific energy consumption of hydrogen turbofans is expected to be about the same as that of kerosene-powered turbofans. Further improvements are possible by taking advantage of hydrogen's unique properties. Cryogenic  $\text{LH}_2$  can be used as a heat sink to move heat to more useful locations in the engine. Condensing some of the water vapor in the exhaust and injecting it back into the engine cycle could be beneficial.

Hydrogen fuel cells are an alternative to combustion-based propulsion. They convert hydrogen into electricity at efficiencies greater than 50%. The electricity then powers electric motors connected to propellers or ducted fans. Aircraft with fuel cell propulsion systems can be true zero-emission aircraft if contrail formation is avoided by managing the water exhaust. The specific power, efficiency, and durability of aviation-specific fuel cells should be improved. Depending on the aircraft and fuel cell designs, a fuel cell propulsion system for a narrowbody transport aircraft is estimated to be three times heavier than an equivalent turbofan propulsion system. Fuel cell-powered aircraft require carefully designed thermal management systems to mitigate the weight and drag penalties. Innovative designs may take advantage of the heat produced by the fuel cell for other purposes, such as managing the  $\text{LH}_2$  storage.

Most proposed hydrogen aircraft concepts use the conventional tube-and-wing configuration because the industry has tube-and-wing-specific design tools and expertise. However, the strong incentive to reduce the weight and drag penalties of onboard hydrogen storage may push aircraft designs toward unconventional configurations, such as blended wing bodies.

Hydrogen has safety benefits over kerosene. It rapidly vaporizes and rises if it leaks, so it does not pool and create standing fires on the ground like kerosene. However, hydrogen has a wider flammability range, making igniting easier. Hydrogen aircraft certification requires thorough leak detection, isolation from ignition sources, and crash-safe structural designs.

From a climate perspective, hydrogen aircraft would have a drastically lower impact than conventional aircraft if the hydrogen is produced with renewable energy, such as wind, solar, or nuclear energy. Hydrogen-powered aircraft produce no carbon dioxide and can reduce or eliminate  $\text{NO}_x$  emissions, depending on the propulsion system. The impact of persistent contrails and contrail cirrus is still uncertain. However, recent estimates predict their impact to be less than the impact of contrails and contrail cirrus from kerosene-powered aircraft. The predicted contrail cirrus impact reduction is because hydrogen combustion exhaust contains no soot or sulfate emissions, which changes

the contrail ice crystal and climate warming properties. The impact of contrails may also be reduced by routing flights around regions where persistent contrails are likely to form. Although hydrogen aircraft would produce more water vapor, direct water vapor emissions (excluding contrails) are expected to have only a minor climate effect, especially when emitted below 8 km.

The economic cost of hydrogen aircraft is still unknown, though most studies predict higher operating costs than today's aircraft. Some of the cost increase is due to higher acquisition and maintenance costs associated with hydrogen storage. Lighter  $\text{LH}_2$  tanks help reduce the amount of fuel the aircraft consumes. The cost of electricity dominates the unit cost of green hydrogen. The decreasing trend in renewable electricity prices will reduce the cost of green hydrogen. Increasing the scale of green hydrogen production would also reduce its unit cost. However, these changes alone may not make green hydrogen cost-competitive with kerosene in the near future.

Transitioning to hydrogen-powered air transportation requires massive investments. Private companies and government-funded projects are designing and flying prototypes, but more funding and engineering development is needed. Together with governmental pressure and industry-wide collaboration, these efforts could steer aviation toward a climate-compatible future based on hydrogen.

### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

### Data availability

Data will be made available on request.

### Acknowledgments

The first author is supported by the Department of Defense through the National Defense Science and Engineering Graduate (NDSEG) Fellowship Program, United States. He is also supported in part by the Michigan Institute for Computational Discovery and Engineering (MICDE) Graduate Fellowship program, United States. The second author was partially supported by NASA, United States through grant number F060365 of the Advanced Air Transport Technology (AATT) and Transformational Tools and Technologies (TTT) projects.

The authors would like to thank Gary Mills for his valuable feedback on liquid hydrogen tank technologies. They are also grateful for Fatemeh Salehi's input on hydrogen safety considerations. Finally, the authors would like to acknowledge Jayant Mukhopadhyaya and Martha Neubauer for their helpful comments and Cody Karcher for his fuel cell efficiency and power data.

### References

- [1] International Civil Aviation Organization Industry High Level Group, Aviation Benefits Report 2019, 2019, <https://www.icao.int/sustainability/Documents/AVIATION-BENEFITS-2019-web.pdf>. (Accessed 17 November 2022).
- [2] Dan Rutherford, Mazyar Zeinali, Efficiency Trends for New Commercial Jet Aircraft, 1960 to 2008, Report, The International Council on Clean Transportation, 2009.
- [3] D.S. Lee, D.W. Fahey, A. Skowron, M.R. Allen, U. Burkhardt, Q. Chen, S.J. Doherty, S. Freeman, P.M. Forster, J. Fuglestedt, A. Gettelman, R.R. De León, L.L. Lim, M.T. Lund, R.J. Millar, B. Owen, J.E. Penner, G. Pitari, M.J. Prather, R. Sausen, L.J. Wilcox, The contribution of global aviation to anthropogenic climate forcing for 2000 to 2018, *Atmos. Environ.* (ISSN: 13522310) 244 (2021) 117834, <http://dx.doi.org/10.1016/j.atmosenv.2020.117834>.
- [4] John L. Sloop, Liquid Hydrogen As a Propulsion Fuel, 1945–1959, Scientific and Technical Information Office at the National Aeronautics and Space Administration, 1978, URL <https://core.ac.uk/download/pdf/10339184.pdf>.
- [5] Abe Silverstein, Eldon W. Hall, Liquid hydrogen as a jet fuel for high-altitude aircraft, Research memorandum NACA-RM-E55C28a, NASA, 1955, URL <https://ntrs.nasa.gov/citations/19930088689>.



- [6] G.D. Brewer, The case for hydrogen fueled transport aircraft, in: 9th Propulsion Conference, American Institute of Aeronautics and Astronautics, 1973, <http://dx.doi.org/10.2514/6.1973-1323>.
- [7] G.D. Brewer, R.E. Morris, Study of LH<sub>2</sub> fueled subsonic passenger transport aircraft, Contractor report NASA/CR-144935, NASA, 1976, URL <https://ntrs.nasa.gov/citations/19760012056>.
- [8] G.D. Brewer, R.E. Morris, Advanced supersonic technology concept study—Hydrogen fueled configuration, summary report, Contractor report NASA/CR-2534, NASA, 1975, URL <https://ntrs.nasa.gov/citations/19750013196>.
- [9] G.D. Brewer, R.E. Morris, G.W. Davis, E.F. Versaw, G.R. Cunningham, J.C. Ripley, C.F. Baerst, G. Garmon, Study of fuel systems for LH<sub>2</sub>-fueled subsonic transport aircraft, Contractor report NASA/CR-145369, NASA, 1978, URL <https://ntrs.nasa.gov/citations/19780023142>.
- [10] Heinz G. Klug, Reinhard Faass, CRYOPLANE: hydrogen fuelled aircraft—status and challenges, Air Space Eur. (ISSN: 1290-0958) 3 (3) (2001) 252–254, [http://dx.doi.org/10.1016/S1290-0958\(01\)90110-8](http://dx.doi.org/10.1016/S1290-0958(01)90110-8).
- [11] Brandon Graver, Xinyi Sola Zheng, Daniel Rutherford, Jayant Mukhopadhyaya, Erik Pronk, Vision 2050: Aligning aviation with the Paris Agreement, Report, The International Council on Clean Transportation, 2022.
- [12] U.S. Energy Information Administration, Annual Energy Outlook 2021: With Projections to 2050, U.S. Department of Energy, 2021, [https://www.eia.gov/outlooks/aeo/pdf/AEO\\_Narrative\\_2021.pdf](https://www.eia.gov/outlooks/aeo/pdf/AEO_Narrative_2021.pdf).
- [13] U.S. Department of Transportation, Bureau of transportation statistics T-100 segment data, 2023, [https://www.transtats.bts.gov/Data\\_Elements.aspx?Data=3](https://www.transtats.bts.gov/Data_Elements.aspx?Data=3). (Accessed 5 March 2023).
- [14] Chris Stokel-Walker, Thousands of planes are flying empty and no one can stop them, 2022, <https://www.wired.com/story/airplanes-empty-slots-covid/>. (Accessed 9 March 2023).
- [15] Jayant Mukhopadhyaya, Brandon Graver, Performance analysis of regional electric aircraft, White paper, The International Council on Clean Transportation, 2022.
- [16] Benjamin Brelje, Joaquim R.R.A. Martins, Electric, hybrid, and turboelectric fixed-wing aircraft: A review of concepts, models, and design approaches, Prog. Aerosp. Sci. 104 (2019) 1–19, <http://dx.doi.org/10.1016/j.paerosci.2018.06.004>.
- [17] Gökçin Çınar, Electric planes are coming: Short-hop regional flights could be running on batteries in a few years, 2022, <https://theconversation.com/electric-planes-are-coming-short-hop-regional-flights-could-be-running-on-batteries-in-a-few-years-190098>. (Accessed 14 November 2022).
- [18] Girish Girishkumar, Bryan McCloskey, Alan C. Luntz, Sally Swanson, Winfried Wilcke, Lithium-air battery: promise and challenges, J. Phys. Chem. Lett. 1 (14) (2010) 2193–2203, <http://dx.doi.org/10.1021/jz1005384>.
- [19] N. Imanishi, O. Yamamoto, Perspectives and challenges of rechargeable lithium-air batteries, Mater. Today Adv. 4 (2019) 100031, <http://dx.doi.org/10.1016/j.mtadv.2019.100031>.
- [20] Jin-Hyuk Kang, Jiyoung Lee, Ji-Won Jung, Jiwon Park, Taegyu Jang, Hyun-Soo Kim, Jong-Seok Nam, Haeseong Lim, Ki Ro Yoon, Won-Hee Ryu, Il-Doo Kim, Hye Ryung Byon, Lithium-air batteries: air-breathing challenges and perspective, ACS Nano 14 (11) (2020) 14549–14578, <http://dx.doi.org/10.1021/acsnano.0c07907>.
- [21] Brandon Graver, Dan Rutherford, Sola Zheng, CO<sub>2</sub> emissions from commercial aviation: 2013, 2018, and 2019, Report, The International Council on Clean Transportation, 2020, pp. 1–36.
- [22] Eduardo Cabrera, João M. Melo de Sousa, Use of sustainable fuels in aviation—A review, Energies (ISSN: 1996-1073) 15 (77) (2022) 2440, <http://dx.doi.org/10.3390/en15072440>.
- [23] Clean Sky 2 Joint Undertaking and Fuel Cells and Hydrogen 2 Joint Undertaking, Hydrogen-powered aviation: A fact-based study of hydrogen technology, economics, and climate impact by 2050, Report, Publications Office of the European Union, 2020, <http://dx.doi.org/10.2843/471510>.
- [24] Matteo Prussi, Uisung Lee, Michael Wang, Robert Malina, Hugo Valin, Farzad Taheripour, César Velarde, Mark D. Staples, Laura Lonza, James I. Hileman, CORSIA: The first internationally adopted approach to calculate life-cycle GHG emissions for aviation fuels, Renew. Sustain. Energy Rev. 150 (2021) <http://dx.doi.org/10.1016/j.rser.2021.111398>.
- [25] Timothy Searchinger, Ralph Heimlich, R.A. Houghton, Fengxia Dong, Amani Elobeid, Jacinto Fabiosa, Simla Tokgoz, Dermot Hayes, Tun-Hsiang Yu, Use of U.S. croplands for biofuels increases greenhouse gases through emissions from land-use change, Science 319 (5867) (2008) 1238–1240, <http://dx.doi.org/10.1126/science.1151861>.
- [26] David Laborde, Assessing the land use change consequences of European biofuel policies, Final report, International Food Policy Institute, 2011, <https://www.ifpri.org/publication/assessing-land-use-change-consequences-european-biofuel-policies>.
- [27] Tyler J. Lark, Nathan P. Hendricks, Aaron Smith, Nicholas Pates, Seth A. Spawn-lee, Matthew Bougie, Eric G. Booth, Christopher J. Kucharik, Holly K. Gibbs, Environmental outcomes of the US renewable fuel standard, Proc. Natl. Acad. Sci. 119 (9) (2022) <http://dx.doi.org/10.1073/pnas.2101084119>.
- [28] Patrick Schmidt, Valentin Batteiger, Arne Roth, Werner Weindorf, Tetyana Raksha, Power-to-liquids as renewable fuel option for aviation: A review, Chem. Ing. Tech. (ISSN: 1522-2640) 90 (1–2) (2018) <http://dx.doi.org/10.1002/cite.201700129>.
- [29] Ibrahim Dincer, Green methods for hydrogen production, Int. J. Hydrogen Energy 37 (2) (2012) 1954–1971, <http://dx.doi.org/10.1016/j.ijhydene.2011.03.173>.
- [30] Seyedehhoma Ghavam, Maria Vahdati, I.A. Wilson, Peter Styring, Sustainable ammonia production processes, Front. Energy Res. 9 (2021) 34, <http://dx.doi.org/10.3389/fenrg.2021.580808>.
- [31] David Timmons, Rob Terwel, Economics of aviation fuel decarbonization: A preliminary assessment, J. Clean. Prod. (ISSN: 0959-6526) (2022) 133097, <http://dx.doi.org/10.1016/j.jclepro.2022.133097>.
- [32] Dries Verstraete, Long range transport aircraft using hydrogen fuel, Int. J. Hydrogen Energy 38 (34) (2013) 14824–14831, <http://dx.doi.org/10.1016/j.ijhydene.2013.09.021>.
- [33] Steven J. Davis, Nathan S. Lewis, Matthew Shaner, Sonia Aggarwal, Doug Arent, Inês L. Azevedo, Sally M. Benson, Thomas Bradley, Jack Brouwer, Yet-Ming Chiang, Christopher T.M. Clack, Armond Cohen, Stephen Doig, Jae Edmonds, Paul Fennell, Christopher B. Field, Bryan Hannegan, Bri-Mathias Hodge, Martin I. Hoffert, Eric Ingersoll, Paulina Jaramillo, Klaus S. Lackner, Katharine J. Mach, Michael Mastrandrea, Joan Ogden, Per F. Peterson, Daniel L. Sanchez, Daniel Sperling, Joseph Stagner, Jessica E. Trancik, Chi-Jen Yang, Ken Caldeira, Net-zero emissions energy systems, Science 360 (6396) (2018) <http://dx.doi.org/10.1126/science.aas9793>.
- [34] S. Julio Friedmann, Zhiyuan Fan, Ke Tang, Low-carbon heat solutions for heavy industry: sources, options, and costs today, Report, Columbia University Center on Global Energy Policy, 2019.
- [35] S. Garmsiri, I. Dincer, G.F. Naterer, Comparisons of automotive, locomotive, aircraft and marine conversion to hydrogen propulsion using six-sigma methodologies, Int. J. Hydrogen Energy (ISSN: 0360-3199) 38 (5) (2013) 2020–2028, <http://dx.doi.org/10.1016/j.ijhydene.2012.11.088>.
- [36] Brian Ehrhart, Lennie Klebanoff, Ethan Hecht, Alex Headley, Melissa Ng, Cheri Markt, Impact of hydrogen for rail applications, 2019, <https://www.energy.gov/sites/prod/files/2019/04/f62/cto-h2-at-rail-workshop-2019-ehrhart.pdf>.
- [37] Joseph Taylor, Jean-Marc Bonello, Domagoj Barešić, Tristan Smith, Future Maritime Fuels in the USA—the options and their potential pathways, Report, Ocean Conservancy, 2022, [https://oceanconservancy.org/wp-content/uploads/2022/04/oc\\_fuels\\_final\\_report\\_20220117.pdf](https://oceanconservancy.org/wp-content/uploads/2022/04/oc_fuels_final_report_20220117.pdf). (Accessed 26 April 2022).
- [38] V. Sosounov, V. Orlov, Experimental turbofan using liquid hydrogen and liquid natural gas as fuel, in: 26th Joint Propulsion Conference, American Institute of Aeronautics and Astronautics, 1990, <http://dx.doi.org/10.2514/6.1990-2421>.
- [39] Boeing, Boeing successfully flies fuel cell-powered airplane, 2008, [https://web.archive.org/web/20080406204719if/http://www.boeing.com:80/news/releases/2008/q2/080403a\\_nr.html](https://web.archive.org/web/20080406204719if/http://www.boeing.com:80/news/releases/2008/q2/080403a_nr.html). (Accessed 21 June 2022).
- [40] German Aerospace Center, Antares DLR-H2—out of operation, 2022, <http://www.dlr.de/content/en/articles/aeronautics/research-fleet-infrastructure/dlr-research-aircraft/antares-dlr-h2-out-of-operation.html>. (Accessed 9 November 2022).
- [41] AeroVironment, AeroVironment's global observer stratospheric unmanned aircraft system completes initial flight testing, 2010, [https://www.avinc.com/resources/press-releases/view/aerovironments\\_global\\_observer\\_stratospheric\\_unmanned\\_aircraft\\_system\\_compl](https://www.avinc.com/resources/press-releases/view/aerovironments_global_observer_stratospheric_unmanned_aircraft_system_compl). (Accessed 9 November 2022).
- [42] AeroVironment, Global observer, AeroVironment's extreme endurance unmanned aircraft system, achieves historic first hydrogen-powered flight, 2011, [https://www.avinc.com/resources/press-releases/view/global\\_observer\\_aerovironments\\_extreme\\_endurance\\_unmanned\\_aircraft\\_system\\_a](https://www.avinc.com/resources/press-releases/view/global_observer_aerovironments_extreme_endurance_unmanned_aircraft_system_a). (Accessed 9 November 2022).
- [43] Boeing, Boeing: Phantom eye, 2022, <https://www.boeing.com/defense/phantom-eye/>. (Accessed 9 November 2022).
- [44] German Aerospace Center, Zero-emission air transport—first flight of four-seat passenger aircraft HY4, 2016, [https://www.dlr.de/content/en/articles/news/2016/20160929\\_zero-emission-air-transport-first-flight-of-four-seat-passenger-aircraft-hy4\\_19469.html](https://www.dlr.de/content/en/articles/news/2016/20160929_zero-emission-air-transport-first-flight-of-four-seat-passenger-aircraft-hy4_19469.html). (Accessed 9 November 2022).
- [45] Mark Harris, ZeroAvia's hydrogen fuel cell plane ambitions clouded by technical challenges, 2021, <https://techcrunch.com/2021/04/14/zeroavias-hydrogen-fuel-cell-plane-ambitions-clouded-by-technical-challenges/>.
- [46] Graham Warwick, ZeroAvia prepares for hydrogen fuel-cell propulsion flight tests, 2020, <https://aviationweek.com/aerospace/emerging-technologies/zeroavia-prepares-hydrogen-fuel-cell-propulsion-flight-tests>. (Accessed 3 December 2022).
- [47] Casey Crownhart, Hydrogen-powered planes take off with startup's test flight, 2023, <https://www.technologyreview.com/2023/01/19/1067113/hydrogen-planes-test-flight/>. (Accessed 16 February 2023).
- [48] Guy Norris, Hydrogen-electric power accelerates with universal dash 8 test flight, 2023, <https://aviationweek.com/aerospace/emerging-technologies/hydrogen-electric-power-accelerates-universal-dash-8-test-flight>. (Accessed 11 March 2023).
- [49] Airbus, Airbus reveals new zero-emission concept aircraft, 2020, <https://www.airbus.com/en/newsroom/press-releases/2020-09-airbus-reveals-new-zero-emission-concept-aircraft>. (Accessed 16 March 2022).

- [50] David Debney, Simon Beddoes, Malcolm Foster, Darren James, Edward Kay, Oliver Kay, Karim Shawki, Emma Stubbs, Deborah Thomas, Karen Weider, Richard Wilson, Zero-Carbon Emission Aircraft Concepts, FlyZero report FZO-AIN-REP-0007, Aerospace Technology Institute, 2022, <https://www.ati.org.uk/wp-content/uploads/2022/03/FZO-AIN-REP-0007-FlyZero-Zero-Carbon-Emission-Aircraft-Concepts.pdf>.
- [51] The Council of the European Union, Council regulation (eu) 2021/2085, 2021, <http://data.europa.eu/eli/reg/2021/2085>. (Accessed 23 January 2023).
- [52] Andreas Goldmann, Waldemar Sauter, Marcel Oettinger, Tim Kluge, Uwe Schröder, Joerg R. Seume, Jens Friedrichs, Friedrich Dinkelacker, A study on electrofuels in aviation, *Energies* 11 (2) (2018) 392, <http://dx.doi.org/10.3390/en11020392>.
- [53] J.W. Sheffield, K.B. Martin, R. Folkson, Electricity and hydrogen as energy vectors for transportation vehicles, in: *Alternative Fuels and Advanced Vehicle Technologies for Improved Environmental Performance*, Woodhead Publishing, 2014, pp. 117–137, <http://dx.doi.org/10.1533/9780857097422.1.117>.
- [54] Kasper T. Møller, Torben R. Jensen, Etsuo Akiba, Hai-wen Li, Hydrogen—A sustainable energy carrier, *Progress Nat. Sci. Mater. Internat.* 27 (1) (2017) 34–40, <http://dx.doi.org/10.1016/j.pnsc.2016.12.014>.
- [55] G.D. Brewer, Hydrogen Aircraft Technology, in: *Aircraft Technology*, CRC Press, Boca Raton, Florida, ISBN: 0-8493-5838-8, 1991, <http://dx.doi.org/10.1201/9780203751480>.
- [56] Cryoplane Project, Liquid hydrogen fuelled aircraft—system analysis, Technical report GRD1-1999-10014, European Commission, 2003.
- [57] Dries Verstraete, The potential of liquid hydrogen for long range aircraft propulsion (Ph.D. thesis), Cranfield University, 2009, URL <https://dspace.lib.cranfield.ac.uk/handle/1826/4089>.
- [58] Jayant Mukhopadhyaya, Dan Rutherford, Performance Analysis of Evolutionary Hydrogen-Powered Aircraft, White paper, The International Council on Clean Transportation, 2022.
- [59] Leland M. Nicolai, Grant E. Carichner, Fundamentals of Aircraft and Airship Design, Vol I — Aircraft Design, AIAA, Reston, VA, 2010.
- [60] Ginger Gardiner, HyPoint partners with GTL to extend zero-emission flight with ultralight liquid hydrogen tanks, 2022, <https://www.compositesworld.com/news/hypoint-partners-with-gtl-to-extend-zero-emission-flight-with-ultralight-liquid-hydrogen-tanks>. (Accessed 27 January 2023).
- [61] Gary L. Mills, Brian W. Buchholtz, Al Olsen, Design, fabrication and testing of a liquid hydrogen fuel tank for a long duration aircraft, in: *AIP Conference Proceedings*, Vol. 1434, 2012, pp. 773–780, <http://dx.doi.org/10.1063/1.4706990>.
- [62] David Kramer, Hydrogen-powered aircraft may be getting a lift, *Phys. Today* 73 (12) (2020) 27–31, <http://dx.doi.org/10.1063/PT.3.4632>.
- [63] Toyota, 2019 Mirai product information, 2019, <https://pressroom.toyota.com/vehicle/2019-mirai/>. (Accessed 27 January 2023).
- [64] Subodh K. Mital, John Z. Gyekenyesi, Steven M. Arnold, Roy M. Sullivan, Jane M. Manderscheid, Pappu L.N. Murthy, Review of Current State of the Art and Key Design Issues with Potential Solutions for Liquid Hydrogen Cryogenic Storage Tank Structures for Aircraft Applications, Technical memorandum NASA/TM-2006-214346, NASA, 2006.
- [65] N.R. Moody, A.W. Thompson, Hydrogen effects on material behavior, in: *Fourth International Conference on the Effect of Hydrogen on the Behavior of Metals*, 1990, URL <https://www.osti.gov/biblio/5241236>.
- [66] Jonathan A. Lee, Hydrogen Embrittlement, Technical memorandum NASA/TM-2016-218602, NASA, 2016, URL <https://ntrs.nasa.gov/citations/20160005654>.
- [67] Michael J. Robinson, Determination of allowable hydrogen permeation rates for launch vehicle propellant tanks, *J. Spacecr. Rockets* (ISSN: 0022-4650) 45 (1) (2008) 82–89, <http://dx.doi.org/10.2514/1.29709>.
- [68] D. Nash, D. Aklil, E. Johnson, R. Gazey, V. Ortisi, Hydrogen storage: Compressed gas, in: *Comprehensive Renewable Energy*, 4, Elsevier, ISBN: 978-0-08-087873-7, 2012, pp. 131–155, <http://dx.doi.org/10.1016/B978-0-08-087872-0.00413-3>.
- [69] Ginger Gardiner, Carbon fiber in pressure vessels for hydrogen, 2020, <https://www.compositesworld.com/articles/cfrp-pressure-vessels-for-hydrogen>. (Accessed 21 February 2022).
- [70] Ying Su, Hong Lv, Wei Zhou, Cunman Zhang, Review of the hydrogen permeability of the liner material of type IV on-board hydrogen storage tank, *World Electr. Veh. J.* (ISSN: 2032-6653) 12 (33) (2021) 130, <http://dx.doi.org/10.3390/wevj12030130>.
- [71] Hirokata Fujiwara, Hiroaki Ono, Keiko Ohyama, Masahiro Kasai, Fumitoshi Kaneko, Shin Nishimura, Hydrogen permeation under high pressure conditions and the destruction of exposed polyethylene-property of polymeric materials for high-pressure hydrogen devices (2)-, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 46 (21) (2021) 11832–11848, <http://dx.doi.org/10.1016/j.ijhydene.2020.12.223>.
- [72] Andrew Gong, Dries Verstraete, Fuel cell propulsion in small fixed-wing unmanned aerial vehicles: Current status and research needs, *Int. J. Hydrogen Energy* 42 (33) (2017) 21311–21333, <http://dx.doi.org/10.1016/j.ijhydene.2017.06.148>.
- [73] Etienne Rivard, Michel Trudeau, Karim Zaghib, Hydrogen storage for mobility: A review, *Materials* (ISSN: 1996-1944) 12 (1212) (2019) 1973, <http://dx.doi.org/10.3390/ma12121973>.
- [74] Zhoutian Ge, Yutong Yuan, Jianfeng Shi, Challenges in developing linerless composite gas cylinder for on-board hydrogen storage, in: *ASME 2022 Pressure Vessels & Piping Conference*, American Society of Mechanical Engineers Digital Collection, 2022, <http://dx.doi.org/10.1115/PVP2022-85852>.
- [75] Pat B. McLaughlan, Scott C. Forth, Lorie R. Grimes-Ledesma, Composite Overwrapped Pressure Vessels, A Primer, Special publication NASA/SP-2011-573, NASA, 2011, URL <https://ntrs.nasa.gov/citations/20110008406>.
- [76] Anthony J. Colozza, Hydrogen Storage for Aircraft, Contractor report NASA/CR—2002-211867, 2002, URL <https://ntrs.nasa.gov/citations/20020085127>.
- [77] David K. Roylance, Netting Analysis for Filament-Wound Pressure Vessels, Technical note AMMRC TN 76-3, Army Materials and Mechanics Research Center, 1976, URL <http://web.mit.edu/roylance/www/netting.pdf>.
- [78] S.T. Peters, W.D. Humphrey, R.F. Foral, Filament winding—Composite structure fabrication, 1991, URL <https://www.osti.gov/biblio/5642746>.
- [79] T.Q. Hua, R.K. Ahluwalia, J.-K. Peng, M. Kromer, S. Lasher, K. McKenney, K. Law, J. Sinha, Technical assessment of compressed hydrogen storage tank systems for automotive applications, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 36 (4) (2011) 3037–3049, <http://dx.doi.org/10.1016/j.ijhydene.2010.11.090>.
- [80] Thanh Q. Hua, Hee-Seok Roh, Rajesh K. Ahluwalia, Performance assessment of 700-bar compressed hydrogen storage for light duty fuel cell vehicles, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 42 (40) (2017) 25121–25129, <http://dx.doi.org/10.1016/j.ijhydene.2017.08.123>.
- [81] Eric W. Lemmon, Marcia L. Huber, Jacob W. Leachman, Revised standardized equation for hydrogen gas densities for fuel consumption applications, *J. Res. Natl. Inst. Stand. Technol.* 113 (6) (2008) 341, <http://dx.doi.org/10.6028/jres.113.028>.
- [82] Daniel Silberhorn, Georgi Atanasov, Jan-Niclas Walther, Thomas Zill, Assessment of hydrogen fuel tank integration at aircraft level, in: *Deutscher Luft-Und Raumfahrtkongress 2019*, 2019, URL <https://elib.dlr.de/129643/>.
- [83] Hans W. Pohl, Valentin V. Malychyev, Hydrogen in future civil aviation, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 22 (10) (1997) 1061–1069, [http://dx.doi.org/10.1016/S0360-3199\(95\)00140-9](http://dx.doi.org/10.1016/S0360-3199(95)00140-9).
- [84] Marc G. Millis, Robert T. Tornabene, John M. Jurns, Mark D. Guynn, Thomas M. Tomsik, Thomas J. Van Overbeke, Hydrogen Fuel System Design Trades for High-Altitude Long-Endurance Remotely-Operated Aircraft, Technical memorandum NASA/TM-2009-215521, NASA, 2009, URL <https://ntrs.nasa.gov/citations/20090013674>.
- [85] J.E. Fesmire, B.E. Coffman, B.J. Meneghelli, K.W. Heckle, Spray-on foam insulations for launch vehicle cryogenic tanks, *Cryogenics* (ISSN: 0011-2275) 52 (4) (2012) 251–261, <http://dx.doi.org/10.1016/j.cryogenics.2012.01.018>.
- [86] National Aeronautics and Space Administration, Thermal Protection System, Contractor report NASA/FS-2004-08-97-MSFC, NASA, 2004, URL [https://www.nasa.gov/pdf/63758main\\_TPS\\_FACT\\_SHEET.pdf](https://www.nasa.gov/pdf/63758main_TPS_FACT_SHEET.pdf).
- [87] D. Verstraete, P. Hendrick, P. Pilidis, K. Ramsden, Hydrogen fuel tanks for subsonic transport aircraft, *Int. J. Hydrogen Energy* 35 (20) (2010) 11085–11098, <http://dx.doi.org/10.1016/j.ijhydene.2010.06.060>.
- [88] J. Marquardt, J. Keller, G. Mills, J. Schmidt, An overview of Ball Aerospace cryogen storage and delivery systems, in: *IOP Conference Series: Materials Science and Engineering*, Vol. 101, IOP Publishing, 2015, <http://dx.doi.org/10.1088/1757-899X/101/1/012086>.
- [89] Airbus, How to store liquid hydrogen for zero-emission flight, 2021, <https://www.airbus.com/en/newsroom/news/2021-12-how-to-store-liquid-hydrogen-for-zero-emission-flight>. (Accessed 24 January 2023).
- [90] Jon Huete, Pericles Pilidis, Parametric study on tank integration for hydrogen civil aviation propulsion, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 46 (74) (2021) 37049–37062, <http://dx.doi.org/10.1016/j.ijhydene.2021.08.194>.
- [91] Gary Mills, A comparison of liquid hydrogen tanks for aircraft, in: *Presented at the 2021 AIAA Electric Aircraft Technologies Symposium*, 2021.
- [92] Roy M. Sullivan, Joseph L. Palko, Robert T. Tornabene, Brett A. Bednarczyk, Lynn M. Powers, Subodh K. Mital, Lizalyn M. Smith, Xiao-Yen J. Wang, James E. Hunter, Engineering Analysis Studies for Preliminary Design of Lightweight Cryogenic Hydrogen Tanks in UAV Applications, Technical publication NASA/TP-2006-214094, NASA, 2006, URL <https://ntrs.nasa.gov/citations/20060021606>.
- [93] CGA, Pressure Relief Device Standards—Part 2—Portable Containers for Compressed Gases, Standard CGA S-1.2, Compressed Gas Association, McLean, Virginia, 2019, URL <https://portal.cganet.com/Publication/Details.aspx?id=S-1.2>.
- [94] Yanan Qiu, Huan Yang, Lige Tong, Li Wang, Research progress of cryogenic materials for storage and transportation of liquid hydrogen, *Metals* (ISSN: 2075-4701) 11 (77) (2021) 1101, <http://dx.doi.org/10.3390/met11071101>.
- [95] R. Heydenreich, Cryotanks in future vehicles, *Cryogenics* (ISSN: 0011-2275) 38 (1) (1998) 125–130, [http://dx.doi.org/10.1016/S0011-2275\(97\)00122-7](http://dx.doi.org/10.1016/S0011-2275(97)00122-7).
- [96] Michael Robinson, Jeffrey Eichinger, Scott Johnson, Hydrogen permeability requirements and testing for reusable launch vehicle tanks, in: *43rd AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics, and Materials Conference*, American Institute of Aeronautics and Astronautics, ISBN: 978-1-62410-117-5, 2002, <http://dx.doi.org/10.2514/6.2002-1418>.

- [97] Boeing, Boeing breakthrough in all-composite cryogenic propellant tank advances technology readiness, 2022, <https://boeing.mediaroom.com/news-releases-statements?item=130996>. (Accessed 9 February 2022).
- [98] G.D. Brewer, R.E. Morris, R.H. Lange, J.W. Moore, Study of the application of hydrogen fuel to long-range subsonic transport aircraft. Volume 1: Summary, Contractor report NASA/CR-132558, NASA, 1975, URL <https://ntrs.nasa.gov/citations/19790025036>.
- [99] Giuseppe Onorato, Fuel Tank Integration for Hydrogen Airliners, Delft University of Technology, 2021.
- [100] G. Onorato, P. Proesmans, M.F.M. Hoogreef, Assessment of hydrogen transport aircraft, CEAS Aeronaut. J. (ISSN: 1869-5590) 13 (2022) <http://dx.doi.org/10.1007/s13272-022-00601-6>.
- [101] Brooks McKinney and Tory Neiwerth, Northrop Grumman, NASA complete testing of prototype composite cryogenic fuel tank, 2004, <https://news.northropgrumman.com/news/releases/northrop-grumman-nasa-complete-testing-of-prototype-composite-cryogenic-fuel-tank>. (Accessed 7 April 2023).
- [102] Ginger Gardiner, Collins Aerospace to lead COCOLIH2T project, 2023, <https://www.compositesworld.com/news/collins-aerospace-to-lead-cocolih2t-project>. (Accessed 7 April 2023).
- [103] Gary Letchworth, X-33 reusable launch vehicle demonstrator, spaceport and range, in: AIAA Space 2011 Conference & Exposition, 2011, p. 7314, <http://dx.doi.org/10.2514/6.2011-7314>.
- [104] Eugina D. Mendez Ramos, Enabling Conceptual Design and Analysis of Cryogenic In-Space Vehicles Through the Development of an Extensible Boil-Off Model (Ph.D. thesis), Georgia Institute of Technology, 2021, URL <http://hdl.handle.net/1853/64797>.
- [105] Paul N. Estey, David H. Lewis, Maureen Connor, Prediction of a propellant tank pressure history using state space methods, J. Spacecr. Rockets 20 (1) (1983) 49–54, <http://dx.doi.org/10.2514/3.28355>.
- [106] Elliot Ring, Rocket propellant and pressurization systems, Prentice-Hall, Englewood Cliffs, New Jersey, United States, 1964, pp. 211–245.
- [107] P. Chen, Hydrogen storage: Liquid and chemical, in: Ali Sayigh (Ed.), Comprehensive Renewable Energy, vol. 4, Elsevier, ISBN: 978-0-08-087873-7, 2012, pp. 157–177, <http://dx.doi.org/10.1016/B978-0-08-087873-7.2012>.
- [108] Joseph Brand, Sam Sampath, Frank Shum, Robert Bayt, Jeffrey Cohen, Potential use of hydrogen in air propulsion, in: AIAA International Air and Space Symposium and Exposition: The Next 100 Years, American Institute of Aeronautics and Astronautics, 2003, <http://dx.doi.org/10.2514/6.2003-2879>.
- [109] Jon Hemmerdinger, magniX rolls out two more-powerful electric propulsion systems, 2021, <https://www.flightglobal.com/engines/magnix-rolls-out-two-more-powerful-electric-propulsion-systems/144214.article>. (Accessed 11 March 2023).
- [110] Ruben DelRosario, A Future with Hybrid Electric Propulsion Systems: A NASA Perspective, Presentation GRC-E-DAA-TN17600, NASA, 2014, URL <https://ntrs.nasa.gov/citations/20150000748>, Presented at the Turbine Engine Technology Symposium.
- [111] Ryan O'Hayre, Suk-Won Cha, Whitney G. Colella, Fritz B. Prinz, Fuel Cell Fundamentals, third ed., Wiley, ISBN: 9781119191766, 2016, <http://dx.doi.org/10.1002/9781119191766>.
- [112] Florian M. Troeltsch, Marc Engelmann, Anna E. Scholz, Fabian Peter, Jochen Kaiser, Mirko Hornung, Hydrogen powered long haul aircraft with minimized climate impact, in: AIAA Aviation 2020 Forum, American Institute of Aeronautics and Astronautics, 2020, <http://dx.doi.org/10.2514/6.2020-2660>.
- [113] Arne Seitz, Markus Nickl, Florian Troeltsch, Kathrin Ebner, Initial assessment of a fuel cell-gas turbine hybrid propulsion concept, Aerospace (ISSN: 2226-4310) 9 (22) (2022) 68, <http://dx.doi.org/10.3390/aerospace9020068>.
- [114] Fredrik Svensson, Potential of reducing the environmental impact of civil subsonic aviation by using liquid hydrogen (Ph.D. thesis), Cranfield University, 2005, <http://dspace.lib.cranfield.ac.uk/handle/1826/10726>.
- [115] Durgesh Chandel, Edward M. Greitzer, David K. Hall, John Reband, Thanathepan Balachandran, Jianqiao Xiao, Kiruba S. Haran, Conceptual design of distributed electrified boundary layer ingesting propulsors for the CHEETA aircraft concept, in: AIAA Propulsion and Energy 2021 Forum, American Institute of Aeronautics and Astronautics, 2021, <http://dx.doi.org/10.2514/6.2021-3287>.
- [116] Andrew S. White, Elias Waddington, Jason M. Merret, Edward M. Greitzer, Phillip J. Ansell, David K. Hall, System-level utilization of low-grade, MW-scale thermal loads for electric aircraft, in: AIAA Aviation 2022 Forum, American Institute of Aeronautics and Astronautics, 2022, <http://dx.doi.org/10.2514/6.2022-3291>.
- [117] European Union Aviation Safety Agency, Type-certificate data sheet for CFM56-7B series engines, 2023, <https://www.easa.europa.eu/en/downloads/7795/en>. (Accessed 22 February 2023).
- [118] Jan Roskam, Airplane Design Part V: Component Weight Estimation, Roskam Aviation and Engineering Corporation, Ottawa, Kansas, 1989.
- [119] Douglas P. Wells, Bryce L. Horvath, Linwood A. McCullers, The Flight Optimization System Weights Estimation Method, Technical Memorandum TM-2017-219627, NASA, 2017.
- [120] Airbus, Airbus and CFM international to pioneer hydrogen combustion technology, 2022, <https://www.airbus.com/en/newsroom/press-releases/2022-02-airbus-and-cfm-international-to-pioneer-hydrogen-combustion>. (Accessed 18 July 2022).
- [121] Pratt & Whitney, Pratt & Whitney awarded department of energy project to develop hydrogen propulsion technology, 2022, <https://newsroom.prattwhitney.com/2022-02-21-Pratt-Whitney-Awarded-Department-of-Energy-Project-to-Develop-Hydrogen-Propulsion-Technology>. (Accessed 18 July 2022).
- [122] Rolls-Royce, Rolls-Royce and easyJet set new world first, 2022, <https://www.rolls-royce.com/media/press-releases/2022/28-11-2022-rr-and-easyjet-set-new-aviation-world-first-with-successful-hydrogen-engine-run>. (Accessed 18 February 2023).
- [123] Bhupendra Khandelwal, Adam Karakurt, Paulas R. Sekaran, Vishal Sethi, Riti Singh, Hydrogen powered aircraft: The future of air transport, Prog. Aerosp. Sci. (ISSN: 03760421) 60 (2013) 45–59, <http://dx.doi.org/10.1016/j.paerosci.2012.12.002>.
- [124] Cecil Marek, Timothy Smith, Krishna Kundu, Low emission hydrogen combustors for gas turbines using lean direct injection, in: 41st AIAA/ASME/SAE/ASEE Joint Propulsion Conference & Exhibit, American Institute of Aeronautics and Astronautics, 2005, <http://dx.doi.org/10.2514/6.2005-3776>.
- [125] G. Dahl, F. Suttrop, Engine control and low-NO<sub>x</sub> combustion for hydrogen fuelled aircraft gas turbines, Int. J. Hydrogen Energy (ISSN: 0360-3199) 23 (8) (1998) 695–704, [http://dx.doi.org/10.1016/S0360-3199\(97\)00115-8](http://dx.doi.org/10.1016/S0360-3199(97)00115-8).
- [126] G. Corchero, J.L. Montañés, An approach to the use of hydrogen for commercial aircraft engines, Proc. Inst. Mech. Eng. G (ISSN: 0954-4100) 219 (1) (2005) 35–44, <http://dx.doi.org/10.1243/095441005X9139>.
- [127] Stefano Boggia, Anthony Jackson, Some unconventional aero gas turbines using hydrogen fuel, in: ASME Turbo Expo 2002: Power for Land, Sea, and Air, American Society of Mechanical Engineers Digital Collection, 2002, pp. 683–690, <http://dx.doi.org/10.1115/GT2002-30412>.
- [128] Hamidreza Abedi, Carlos Xisto, Isak Jonsson, Tomas Grönstedt, Andrew Rolt, Preliminary analysis of compression system integrated heat management concepts using LH<sub>2</sub>-based parametric gas turbine model, Aerospace (ISSN: 2226-4310) 9 (44) (2022) 216, <http://dx.doi.org/10.3390/aerospace9040216>.
- [129] Michael Sheath, Michael Spooner, Zakia Hamadache, Hydrogen Gas Turbines and Thrust Generation Roadmap Report, FlyZero report FZO-PPN-COM-0023, Aerospace Technology Institute, 2022, <https://www.ati.org.uk/wp-content/uploads/2022/03/FZO-PPN-COM-0023-Hydrogen-Gas-Turbines-and-Thrust-Generation-Roadmap-Report.pdf>.
- [130] David C. Maniaci, Relative performance of a liquid hydrogen-fueled commercial transport, in: 46th AIAA Aerospace Sciences Meeting and Exhibit, 2008, <http://dx.doi.org/10.2514/6.2008-152>.
- [131] German Aerospace Center, HY4—Zero-emission passenger flights, 2015, [https://www.dlr.de/tt/en/Portaldata/41/Resources/dokumente/esi/DLR\\_Hy4\\_Broschue\\_ENGLISCH\\_ONLINE\\_191115.pdf](https://www.dlr.de/tt/en/Portaldata/41/Resources/dokumente/esi/DLR_Hy4_Broschue_ENGLISCH_ONLINE_191115.pdf). (Accessed 26 July 2022).
- [132] ZeroAvia, ZeroAvia and PowerCell sign memorandum of understanding regarding joint development and series deliveries of fuel cell stacks for aviation, 2022, <https://www.zeroavia.com/powercell-mou>. (Accessed 26 July 2022).
- [133] K.M. Spencer, C.A. Martin, Investigation of Potential Fuel Cell Use in Aircraft, Technical Report IDA Document D-5043, Institute for Defense Analyses, 2013, <https://www.ida.org/-/media/feature/publications/i/in/investigation-of-potential-fuel-cell-use-in-aircraft/d-5043.ashx>.
- [134] James Larminie, Andrew Dicks, Fuel Cell Systems Explained, second ed., Wiley, ISBN: 9781118706992, 2003, <http://dx.doi.org/10.1002/9781118706992>.
- [135] F. Laurencelle, R. Chahine, J. Hamelin, K. Agbossou, M. Fournier, T.K. Bose, A. Laperrière, Characterization of a Ballard MK5-E proton exchange membrane fuel cell stack, Fuel Cells (ISSN: 1615-6854) 1 (1) (2001) 66–71, [http://dx.doi.org/10.1002/1615-6854\(200105\)1:1<66::AID-FUCE66>3.0.CO;2-3](http://dx.doi.org/10.1002/1615-6854(200105)1:1<66::AID-FUCE66>3.0.CO;2-3).
- [136] Junbom Kim, Seong-Min Lee, Supramaniam Srinivasan, Charles E. Chamberlin, Modeling of proton exchange membrane fuel cell performance with an empirical equation, J. Electrochem. Soc. (ISSN: 1945-7111) 142 (8) (1995) 2670, <http://dx.doi.org/10.1149/1.2050072>.
- [137] Tabbi Wilberforce, A.G. Olabi, Imran Muhammad, Abed Alaswad, Enas Taha Sayed, Ahmed G. Abo-Khalil, Hussein M. Maghrabie, Khaled Elsaid, Mohammad Ali Abdelkareem, Recovery of waste heat from proton exchange membrane fuel cells—A review, Int. J. Hydrogen Energy (ISSN: 0360-3199) (2022) <http://dx.doi.org/10.1016/j.ijhydene.2022.08.069>.
- [138] Ahmad Baroutaji, Arun Arjunan, Mohamad Ramadan, John Robinson, Abed Alaswad, Mohammad Ali Abdelkareem, Abdul-Ghani Olabi, Advancements and prospects of thermal management and waste heat recovery of PEMFC, Int. J. Thermofluids (ISSN: 2666-2027) 9 (2021) 100064, <http://dx.doi.org/10.1016/j.ijft.2021.100064>.
- [139] Till Lennart Kösters, Xi Liu, Dragan Kožulović, Shaofan Wang, Jens Friedrichs, Xin Gao, Comparison of phase-change-heat-pump cooling and liquid cooling for PEM fuel cells for MW-level aviation propulsion, Int. J. Hydrogen Energy (ISSN: 0360-3199) (2022) <http://dx.doi.org/10.1016/j.ijhydene.2022.06.235>.
- [140] M. Schröder, F. Becker, J. Kallo, C. Gentner, Optimal operating conditions of PEM fuel cells in commercial aircraft, Int. J. Hydrogen Energy (ISSN: 0360-3199) 46 (66) (2021) 33218–33240, <http://dx.doi.org/10.1016/j.ijhydene.2021.07.099>.



- [141] Lixin Fan, Zhengkai Tu, Siew Hwa Chan, Recent development of hydrogen and fuel cell technologies: A review, *Energy Rep.* (ISSN: 2352-4847) 7 (2021) 8421–8446, <http://dx.doi.org/10.1016/j.egy.2021.08.003>.
- [142] Ali Mokmeli, Saeed Asghari, An investigation into the effect of anode purging on the fuel cell performance, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 35 (17) (2010) 9276–9282, <http://dx.doi.org/10.1016/j.ijhydene.2010.03.079>.
- [143] Jixin Chen, Jason B. Siegel, Anna G. Stefanopoulou, James R. Waldecker, Optimization of purge cycle for dead-ended anode fuel cell operation, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 38 (12) (2013) 5092–5105, <http://dx.doi.org/10.1016/j.ijhydene.2013.02.022>.
- [144] Velia Fabiola Valdés-López, Tom Mason, Paul R. Shearing, Dan J.L. Brett, Carbon monoxide poisoning and mitigation strategies for polymer electrolyte membrane fuel cells—A review, *Prog. Energy Combust. Sci.* (ISSN: 0360-1285) 79 (2020) 100842, <http://dx.doi.org/10.1016/j.pecs.2020.100842>.
- [145] Marty K. Bradley, Christopher K. Droney, Subsonic Ultra Green Aircraft Research: Phase I Final Report, Technical Report CR–2011-216847, NASA, 2011.
- [146] U.S. Department of Energy Fuel Cell Technologies Office, Fuel cells fact sheet, 2015, [https://www.energy.gov/sites/prod/files/2015/11/f27/fcto\\_fuel\\_cells\\_fact\\_sheet.pdf](https://www.energy.gov/sites/prod/files/2015/11/f27/fcto_fuel_cells_fact_sheet.pdf). (Accessed 27 January 2023).
- [147] Mohammad Ali Azizi, Jacob Brouwer, Progress in solid oxide fuel cell-gas turbine hybrid power systems: System design and analysis, transient operation, controls and optimization, *Appl. Energy* (ISSN: 0360-2619) 215 (2018) 237–289, <http://dx.doi.org/10.1016/j.apenergy.2018.01.098>.
- [148] Thomas Kadyk, Christopher Winnefeld, Richard Hanke-Rauschenbach, Ulrike Krewer, Analysis and design of fuel cell systems for aviation, *Energies* (ISSN: 1996-1073) 11 (22) (2018) 375, <http://dx.doi.org/10.3390/en11020375>.
- [149] Elias Waddington, Jason M. Merret, Phillip J. Ansell, Impact of LH<sub>2</sub> fuel cell-electric propulsion on aircraft configuration and integration, in: AIAA Aviation 2021 Forum, American Institute of Aeronautics and Astronautics, 2021, <http://dx.doi.org/10.2514/6.2021-2409>.
- [150] Phillip J. Smith, William R. Bennett, Ian J. Jakupca, Ryan P. Gilligan, Lawrence G. Edwards, Proton Exchange Membrane Fuel Cell Transient Load Response, Technical memorandum NASA/TM–20210018094, NASA, 2021, URL <https://ntrs.nasa.gov/citations/20210018094>.
- [151] G. Romeo, F. Borello, G. Correa, E. Cestino, ENFICA-FC: Design of transport aircraft powered by fuel cell and flight test of zero emission 2-seater aircraft powered by fuel cells fueled by hydrogen, *Int. J. Hydrogen Energy* 38 (1) (2013) 469–479, <http://dx.doi.org/10.1016/j.ijhydene.2012.09.064>.
- [152] Jeffrey M. Collins, Dustin McLarty, All-electric commercial aviation with solid oxide fuel cell-gas turbine-battery hybrids, *Appl. Energy* 265 (2020) <http://dx.doi.org/10.1016/j.apenergy.2020.114787>.
- [153] Wolfgang Stautner, Phillip J. Ansell, Kiruba S. Haran, CHEETA: An all-electric aircraft takes cryogenics and superconductivity on board: Combatting climate change, *IEEE Electr. Mag.* (ISSN: 2325-5889) 10 (2) (2022) 34–42, <http://dx.doi.org/10.1109/MELE.2022.3165948>.
- [154] Wasim Bhatti, Wei Wu, Finn Doyle, Jorge Llambrich, Helen Webber, Nigel Town, Fuel Cells Roadmap Report, FlyZero report FZO-PPN-COM-0033, Aerospace Technology Institute, 2022, <https://www.ati.org.uk/wp-content/uploads/2022/03/FZO-PPN-COM-0033-Fuel-Cells-Roadmap-Report.pdf>.
- [155] Yun Wang, Daniela Fernanda Ruiz Diaz, Ken S. Chen, Zhe Wang, Xavier Corobes Adroher, Materials, technological status, and fundamentals of PEM fuel cells – a review, *Mater. Today* (ISSN: 1369-7021) 32 (2020) 178–203, <http://dx.doi.org/10.1016/j.mattod.2019.06.005>.
- [156] Junye Wang, Barriers of scaling-up fuel cells: Cost, durability and reliability, *Energy* (ISSN: 0360-5442) 80 (2015) 509–521, <http://dx.doi.org/10.1016/j.energy.2014.12.007>.
- [157] Ahmad Baroutaji, Tabbi Wilberforce, Mohamad Ramadan, Abdul Ghani Olabi, Comprehensive investigation on hydrogen and fuel cell technology in the aviation and aerospace sectors, *Renew. Sustain. Energy Rev.* 106 (September 2018) (2019) 31–40, <http://dx.doi.org/10.1016/j.rser.2019.02.022>.
- [158] Toshihiko Yoshida, Koichi Kojima, Toyota MIRAI fuel cell vehicle and progress toward a future hydrogen society, *Electrochem. Soc. Interf.* (ISSN: 1944-8783) 24 (2) (2015) 45, <http://dx.doi.org/10.1149/2.F03152if>.
- [159] Helen Webber, Jorge Llambrich, Henrik Davoudi, Thermal Management Roadmap Report, FlyZero report FZO-PPN-COM-0019, Aerospace Technology Institute, 2022, <https://www.ati.org.uk/wp-content/uploads/2022/03/FZO-PPN-COM-0019-Thermal-Management-Roadmap-Report.pdf>.
- [160] HyPoint Inc, HyPoint technical white paper. white paper, 2021, URL <https://docsend.com/view/t9aw2mk>. (Accessed 7 July 2022).
- [161] H2FLY, H2FLY and Deutsche Aircraft join forces to explore hydrogen powered flight, 2021, [https://www.h2fly.de/\\_files/ugd/403201\\_8a28e7d1e2fc4a32bc5b4592034fc168.pdf](https://www.h2fly.de/_files/ugd/403201_8a28e7d1e2fc4a32bc5b4592034fc168.pdf). (Accessed 21 June 2022).
- [162] ZeroAvia, ZeroAvia kicks off US 19-seat aircraft testing and demonstration program on path to worldwide application of its powertrain technology, 2022, <https://www.zeroavia.com/dornier-228-in-hollister>. (Accessed 21 June 2022).
- [163] ZeroAvia, Alaska air group collaborating with ZeroAvia to develop hydrogen powertrain for 76-seat zero-emission aircraft, 2021, <https://www.zeroavia.com/alaskaair>. (Accessed 21 June 2022).
- [164] ZeroAvia, ZeroAvia raises further \$35 million for zero-emission flight technology, taking total raised to \$115 million, 2021, <https://www.zeroavia.com/united-airlines>. (Accessed 21 June 2022).
- [165] Business Wire, Universal hydrogen and connect airlines announce firm order for conversion of 75 ATR 72-600 regional aircraft to be powered by green hydrogen, 2022, <https://www.businesswire.com/news/home/20220608006035/en/Universal-Hydrogen-and-Connect-Airlines-Announce-Firm-Order-for-Conversion-of-75-ATR-72-600-Regional-Aircraft-to-Be-Powered-by-Green-Hydrogen>. (Accessed 21 June 2022).
- [166] German Aerospace Center, Project BALIS—DLR is developing and testing fuel cells in the megawatt range for air transport, 2021, [https://www.dlr.de/content/en/articles/news/2021/01/20210121\\_balis-project-funding.html](https://www.dlr.de/content/en/articles/news/2021/01/20210121_balis-project-funding.html). (Accessed 21 June 2022).
- [167] Marty Bradley, Identification and descriptions of fuel cell architectures for aircraft applications, in: 2022 IEEE Transportation Electrification Conference & Expo, 2022, pp. 1047–1050, <http://dx.doi.org/10.1109/ITEC53557.2022.9814063>.
- [168] Marty K. Bradley, Christopher K. Droney, Subsonic Ultra Green Aircraft Research Phase II: N+4 Advanced Concept Development, Contractor report NASA/CR–2012-217556, NASA, 2012, URL <https://ntrs.nasa.gov/citations/20120009038>.
- [169] Klaas Burger, Performance of a Single-Aisle Aircraft with Auxiliary Propulsion and Power Unit (Ph.D. thesis), Delft University of Technology, 2022, URL <http://resolver.tudelft.nl/uuid:05b83af2-4538-4d05-9f73-64e1269292cd>.
- [170] Jana Hoidis, A creative drive for the future of flight – bringing e-mobility to the sky requires whole-system thinking, *DLRmagazine* (ISSN: 2190-0108) (164) (2020) 16–19, [https://www.dlr.de/content/en/downloads/2020/dlr-magazine-164-a-creative-drive-for-the-future-of-flight.pdf?\\_\\_blob=publicationFile&v=2](https://www.dlr.de/content/en/downloads/2020/dlr-magazine-164-a-creative-drive-for-the-future-of-flight.pdf?__blob=publicationFile&v=2).
- [171] Airbus, Cryogenics and superconductivity for aircraft, explained, 2021, <https://www.airbus.com/en/newsroom/stories/2021-03-cryogenics-and-superconductivity-for-aircraft-explained>. (Accessed 28 September 2022).
- [172] Pim C. de Boer, Albert J. de Wit, Roel C. van Benthem, Development of a liquid hydrogen-based fuel cell system for the HYDRA-2 drone, in: AIAA SciTech 2022 Forum, American Institute of Aeronautics and Astronautics, 2022, <http://dx.doi.org/10.2514/6.2022-0443>.
- [173] Richard O. Stroman, Michael W. Schuette, Karen Swider-Lyons, Joseph A. Rodgers, Daniel J. Edwards, Liquid hydrogen fuel system design and demonstration in a small long endurance air vehicle, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 39 (21) (2014) 11279–11290, <http://dx.doi.org/10.1016/j.ijhydene.2014.05.065>.
- [174] John Turner, Stephanie Contaut, Alessio Tarantino, Andrew Masson, Cryogenic Hydrogen Fuel System and Storage Roadmap Report, FlyZero report FZO-PPN-MAP-0027, Aerospace Technology Institute, 2022, <https://www.ati.org.uk/wp-content/uploads/2022/03/FZO-PPN-COM-0027-Cryogenic-Hydrogen-Fuel-System-and-Storage-Roadmap-Report.pdf>.
- [175] Robert Bray, Eliot Burrows, Lauren Hadnum, Aircraft Systems, FlyZero report FZO-AIR-REP-0013, Aerospace Technology Institute, 2022, <https://www.ati.org.uk/wp-content/uploads/2022/03/FZO-AIR-REP-0013-Aircraft-Systems.pdf>.
- [176] Phillip J. Ansell, Hydrogen-electric aircraft technologies and integration: Enabling an environmentally sustainable aviation future, *IEEE Electr. Mag.* (ISSN: 2325-5889) 10 (2) (2022) 6–16, <http://dx.doi.org/10.1109/MELE.2022.3165721>.
- [177] Pavlos Rompokos, Andrew Rolt, Devaiah Nalianda, Askin T. Isikveren, Capucine Senné, Tomas Gronstedt, Hamidreza Abedi, Synergistic technology combinations for future commercial aircraft using liquid hydrogen, *J. Eng. Gas Turb. Power* (ISSN: 0742-4795) 143 (7) (2021) <http://dx.doi.org/10.1115/1.4049694>.
- [178] Sean Wakayama, Multidisciplinary design optimization of the blended-wing-body, in: 7th AIAA/USAF/NASA/ISSMO Symposium on Multidisciplinary Analysis and Optimization, American Institute of Aeronautics and Astronautics, 1998, <http://dx.doi.org/10.2514/6.1998-4938>.
- [179] R.H. Liebeck, Design of the blended wing body subsonic transport, *J. Aircr.* 41 (1) (2004) 10–25, <http://dx.doi.org/10.2514/1.9084>.
- [180] Zhoujie Lyu, Joaquim R.R.A. Martins, Aerodynamic design optimization studies of a blended-wing-body aircraft, *J. Aircr.* 51 (5) (2014) 1604–1617, <http://dx.doi.org/10.2514/1.C032491>.
- [181] Mark D. Guynn, Joshua E. Freeh, Erik D. Olson, Evaluation of a Hydrogen Fuel Cell Powered Blended-Wing-Body Aircraft Concept for Reduced Noise and Emissions, Technical memorandum NASA/TM–2004-212989, NASA, 2004, URL <https://ntrs.nasa.gov/citations/20040033924>.
- [182] Victor Li, Alex Velicki, Advanced PRSEUS structural concept design and optimization, in: Proceedings of the 12th AIAA/ISSMO Multidisciplinary Analysis and Optimization Conference, Victoria, BC, 2008, AIAA 2008-5840.
- [183] Dawn C. Jegley, Experimental Behavior of Fatigued Single Stiffener PRSEUS Specimens, Technical Report NASA/TM-2009-215955, 2009.
- [184] Dawn C. Jegley, Influence of impact damage on carbon-epoxy stiffener crippling, in: Proceedings of the American Society for Composites 25th Annual Technical Conference, NASA, Dayton, OH, 2010.
- [185] J. Hoelzen, D. Silberhorn, T. Zill, B. Bensmann, R. Hanke-Rauschenbach, Hydrogen-powered aviation and its reliance on green hydrogen infrastructure—Review and research gaps, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 47 (5) (2022) 3108–3130, <http://dx.doi.org/10.1016/j.ijhydene.2021.10.239>.



- [186] Milan Janić, Greening commercial air transportation by using liquid hydrogen (LH<sub>2</sub>) as a fuel, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 39 (29) (2014) 16426–16441, <http://dx.doi.org/10.1016/j.ijhydene.2014.08.011>.
- [187] G.D. Brewer, The prospects for liquid hydrogen fueled aircraft, *Int. J. Hydrogen Energy* 7 (1) (1982) 21–41, [http://dx.doi.org/10.1016/0360-3199\(82\)90205-1](http://dx.doi.org/10.1016/0360-3199(82)90205-1).
- [188] G.W. Hanks, D.G. Andrews, O.B. Brende, E.E. Eckert, M. Hamamoto, R.H. Kimble, R.L. Kreitinger, H.J. Miyatake, A.M. Momeny, R.A. Taylor, R. Cramer, J.E. West, An exploratory study to determine the integrated technological air transportation system ground requirements of liquid-hydrogen-fueled subsonic, long-haul civil air transports, Contractor report NASA/CR-2699, 1976, URL <https://ntrs.nasa.gov/citations/19770003091>.
- [189] Michael J. Sefain, Hydrogen aircraft concepts and ground support (Ph.D. thesis), Cranfield University, 2005, URL <http://hdl.handle.net/1826/2998>.
- [190] Avions de Transport Regional, ATR: The optimum choice for a friendly environment, 2001, [https://web.archive.org/web/20160808173542/http://web.fc.fi/data/files/ATR\\_TheOptimumChoice.pdf](https://web.archive.org/web/20160808173542/http://web.fc.fi/data/files/ATR_TheOptimumChoice.pdf). (Accessed 19 April 2023).
- [191] David Peterson, James Vickers, Dan DeSantis, Hydrogen Production Cost from PEM Electrolysis—2019, Technical Report 19009, United States Department of Energy, 2020, [https://www.hydrogen.energy.gov/pdfs/19009\\_h2\\_production\\_cost\\_pem\\_electrolysis\\_2019.pdf](https://www.hydrogen.energy.gov/pdfs/19009_h2_production_cost_pem_electrolysis_2019.pdf). (Accessed 29 October 2022).
- [192] International Energy Agency, The Future of Hydrogen, International Energy Agency, 2019, <https://www.iea.org/reports/the-future-of-hydrogen>. (Accessed 16 February 2023).
- [193] J. Hoelzen, M. Flohr, D. Silberhorn, J. Mangold, A. Bensmann, R. Hanke-Rauschenbach, H<sub>2</sub>-powered aviation at airports—Design and economics of LH<sub>2</sub> refueling systems, *Energy Convers. Manag.* X (ISSN: 2590-1745) 14 (2022) 100206, <http://dx.doi.org/10.1016/j.ecmx.2022.100206>.
- [194] National Renewable Energy Laboratory, Levelized cost of energy, State and Local Planning for Energy (SLOPE), 2022, <https://maps.nrel.gov/slope>. (Accessed 30 September 2022).
- [195] Michael J. Ginsberg, Maya Venkatraman, Daniel V. Esposito, Vasilis M. Fthenakis, Minimizing the cost of hydrogen production through dynamic polymer electrolyte membrane electrolyzer operation, *Cell Rep. Phys. Sci.* (ISSN: 2666-3864) 3 (6) (2022) 100935, <http://dx.doi.org/10.1016/j.xcrp.2022.100935>.
- [196] Michele Sclaro, Noah Kittner, Optimizing hybrid offshore wind farms for cost-competitive hydrogen production in Germany, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 47 (10) (2022) 6478–6493, <http://dx.doi.org/10.1016/j.ijhydene.2021.12.062>.
- [197] Albert H. Schrottenboer, Arjen A.T. Veenstra, Michiel A.J. uit het Broek, Evrim Ursavas, A green hydrogen energy system: Optimal control strategies for integrated hydrogen storage and power generation with wind energy, *Renew. Sustain. Energy Rev.* (ISSN: 1364-0321) 168 (2022) 112744, <http://dx.doi.org/10.1016/j.rser.2022.112744>.
- [198] Ahmad Mayyas, Mark Ruth, Bryan Pivovar, Guido Bender, Keith Wipke, Manufacturing Cost Analysis for Proton Exchange Membrane Water Electrolyzers, Technical report NREL/TP-6A20-72740, National Renewable Energy Laboratory, 2019.
- [199] Alex Badgett, Mark Ruth, Bryan Pivovar, Chapter 10—Economic considerations for hydrogen production with a focus on polymer electrolyte membrane electrolysis, in: Tom Smolinka, Jurgen Garche (Eds.), *Electrochemical Power Sources: Fundamentals, Systems, and Applications*, Elsevier, ISBN: 978-0-12-819424-9, 2022, pp. 327–364, <http://dx.doi.org/10.1016/B978-0-12-819424-9.00005-7>.
- [200] U.S. Department of Energy, Hydrogen shot, 2021, <https://www.energy.gov/eere/fuelcells/hydrogen-shot>. (Accessed 12 September 2022).
- [201] Yuanrong Zhou, Stephanie Searle, Cost of Renewable Hydrogen Produced Onsite at Hydrogen Refueling Stations in Europe, White paper, The International Council on Clean Transportation, 2022.
- [202] European Commission, REPowerEU plan, 2022, <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=COM:2022:230:FIN>. (Accessed 3 December 2022).
- [203] Martin Brunner, Eva Maria Plunger, H2FUTURE: Dissemination master plan, 2017, [https://www.h2future-project.eu/images/Publications/H2F\\_WP10\\_D101\\_v11.pdf](https://www.h2future-project.eu/images/Publications/H2F_WP10_D101_v11.pdf). (Accessed 12 September 2022).
- [204] Anna Postma-Kurlanc, Helen Leadbetter, Chris Pickard, Hydrogen Infrastructure and Operations, Airports, Airlines and Airspace, FlyZero report FZO-CST-POS-0035, Aerospace Technology Institute, 2022, <https://www.ati.org.uk/wp-content/uploads/2022/03/FZO-CST-POS-0035-Airports-Airlines-Airspace-Operations-and-Hydrogen-Infrastructure.pdf>.
- [205] P.G. Holborn, J.M. Ingram, C.B. Benson, Modelling studies of the hazards posed by liquid hydrogen use in civil aviation, *IOP Conf. Ser. Mater. Sci. Eng.* (ISSN: 1757-899X) 1226 (1) (2022) 012059, <http://dx.doi.org/10.1088/1757-899X/1226/1/012059>.
- [206] Elham Abohamzeh, Fatemeh Salehi, Mohsen Sheikholeslami, Rouzbeh Abbassi, Faisal Khan, Review of hydrogen safety during storage, transmission, and applications processes, *J. Loss Prev. Process Ind.* (ISSN: 0950-4230) 72 (2021) 104569, <http://dx.doi.org/10.1016/j.jlp.2021.104569>.
- [207] R.K. Nangia, L. Hyde, Arriving at certifiable novel airliner using liquid hydrogen and efficiency metrics, in: 33rd Congress of the International Council of the Aeronautical Sciences, Stockholm, Sweden, 2022, [https://www.icas.org/ICAS\\_ARCHIVE/ICAS2022/data/papers/ICAS2022\\_0373\\_paper.pdf](https://www.icas.org/ICAS_ARCHIVE/ICAS2022/data/papers/ICAS2022_0373_paper.pdf).
- [208] Energy Supply Device Aviation Rulemaking Committee, Energy Supply Device ARC Recommendation Report, Technical report DOT/FAA/TC-19/16, Federal Aviation Administration, 2017, Accessed 30 September 2022.
- [209] Myles Allen, Michelle Cain, Keith Shine, Climate metrics under ambitious mitigation, Oxford Martin School, University of Oxford, 2017, <https://www.oxfordmartin.ox.ac.uk/publications/climate-metrics-under-ambitious-mitigation/>.
- [210] Myles R. Allen, Jan S. Fuglestedt, Keith P. Shine, Andy Reisinger, Raymond T. Pierrehumbert, Piers M. Forster, New use of global warming potentials to compare cumulative and short-lived climate pollutants, *Nature Clim. Change* (ISSN: 1758-6798) 6 (88) (2016) 773–776, <http://dx.doi.org/10.1038/nclimate2998>.
- [211] Aaron Hodges, Anh Linh Hoang, George Tsekouras, Klaudia Wagner, Chong-Yong Lee, Gerhard F. Swiegers, Gordon G. Wallace, A high-performance capillary-fed electrolysis cell promises more cost-competitive renewable hydrogen, *Nature Commun.* (ISSN: 2041-1723) 13 (11) (2022) 1304, <http://dx.doi.org/10.1038/s41467-022-28953-x>.
- [212] Jose M. Bermudez, Stavroula Evangelopoulou, Francesco Pavan, IEA Hydrogen tracking report, International Energy Agency, 2022, <https://www.iea.org/reports/hydrogen>. (Accessed 3 December 2022).
- [213] Cristina Antonini, Karin Treyer, Anne Streb, Mijndert van der Spek, Christian Bauer, Marco Mazzotti, Hydrogen production from natural gas and biomethane with carbon capture and storage—A techno-environmental analysis, *Sustain. Energy Fuels* 4 (6) (2020) 2967–2986, <http://dx.doi.org/10.1039/D0SE00222D>.
- [214] Christian Bauer, Karin Treyer, Cristina Antonini, Joule Bergerson, Matteo Gazzani, Emre Gencer, Jon Gibbins, Marco Mazzotti, Sean T. McCoy, Russell McKenna, Robert Pietzcker, Arvind P. Ravikumar, Matteo C. Romano, Falko Ueckerdt, Jaap Vente, Mijndert van der Spek, On the climate impacts of blue hydrogen production, *Sustain. Energy Fuels* 6 (1) (2022) 66–75, <http://dx.doi.org/10.1039/D1SE01508G>.
- [215] Robert W. Howarth, Mark Z. Jacobson, How green is blue hydrogen? *Energy Sci. Eng.* (ISSN: 2050-0505) 9 (10) (2021) 1676–1687, <http://dx.doi.org/10.1002/ese3.956>.
- [216] Richard Derwent, Peter Simmonds, Simon O'Doherty, Alistair Manning, William Collins, David Stevenson, Global environmental impacts of the hydrogen economy, *Int. J. Nucl. Hydrogen Prod. Appl.* 1 (2006) 57–67, <http://dx.doi.org/10.1504/IJNHPPA.2006.009869>.
- [217] Richard G. Derwent, David S. Stevenson, Steven R. Utembe, Michael E. Jenkin, Anwar H. Khan, Dudley E. Shallcross, Global modelling studies of hydrogen and its isotopomers using STOCHEM-CRI: Likely radiative forcing consequences of a future hydrogen economy, *Int. J. Hydrogen Energy* (ISSN: 0360-3199) 45 (15) (2020) 9211–9221, <http://dx.doi.org/10.1016/j.ijhydene.2020.01.125>.
- [218] Nicola Warwick, Paul Griffiths, James Keeble, Alexander Archibald, John Pyle, Keith Shine, Atmospheric Implications of Increased Hydrogen Use, United Kingdom Department for Business, Energy and Industrial Strategy, 2022, <https://www.gov.uk/government/publications/atmospheric-implications-of-increased-hydrogen-use>.
- [219] Jasmin Cooper, Luke Dubey, Semra Bakkaloglu, Adam Hawkes, Hydrogen emissions from the hydrogen value chain—emissions profile and impact to global warming, *Sci. Total Environ.* (ISSN: 0048-9697) 830 (2022) 154624, <http://dx.doi.org/10.1016/j.scitotenv.2022.154624>.
- [220] D.H. Ehhalt, F. Rohrer, The tropospheric cycle of H<sub>2</sub>: a critical review, *Tellus B: Chem. Phys. Meteorol.* 61 (3) (2009) 500–535, <http://dx.doi.org/10.1111/j.1600-0889.2009.00416.x>.
- [221] George Thomas, George Parks, Potential Roles of Ammonia in a Hydrogen Economy, Technical report, U.S. Department of Energy, 2006, [https://www.energy.gov/sites/prod/files/2015/01/f19/cto\\_nh3\\_h2\\_storage\\_white\\_paper\\_2006.pdf](https://www.energy.gov/sites/prod/files/2015/01/f19/cto_nh3_h2_storage_white_paper_2006.pdf).
- [222] S. Giddey, S.P.S. Badwal, C. Munnings, M. Dolan, Ammonia as a renewable energy transportation media, *ACS Sustain. Chem. Eng.* 5 (11) (2017) 10231–10239, <http://dx.doi.org/10.1021/acsschemeng.7b02219>.
- [223] James N. Galloway, John D. Aber, Jan Willem Erisman, Sybil P. Seitzinger, Robert W. Howarth, Ellis B. Cowling, B. Jack Cosby, The nitrogen cascade, *BioScience* 53 (4) (2003) 341–356, [http://dx.doi.org/10.1641/0006-3568\(2003\)053\[0341:TNC\]2.0.CO;2](http://dx.doi.org/10.1641/0006-3568(2003)053[0341:TNC]2.0.CO;2), ISSN: 0006-3568.
- [224] Susanne E. Bauer, Kostas Tsigaridis, Ron Miller, Significant atmospheric aerosol pollution caused by world food cultivation, *Geophys. Res. Lett.* (ISSN: 1944-8007) 43 (10) (2016) 5394–5400, <http://dx.doi.org/10.1002/2016GL068354>.
- [225] IPCC, Summary for policymakers, in: V. Masson-Delmotte, P. Zhai, A. Pirani, S.L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M.I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J.B.R. Matthews, T.K. Maycock, T. Waterfield, O. Yelekci, R. Yu, B. Zhou (Eds.), *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I To the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 2021, pp. 3–32, <http://dx.doi.org/10.1017/9781009157896.001>.
- [226] Pieter-Jan Proesmans, Roelof Vos, Comparison of future aviation fuels to minimize the climate impact of commercial aircraft, in: AIAA Aviation 2022 Forum, American Institute of Aeronautics and Astronautics, 2022, <http://dx.doi.org/10.2514/6.2022-3288>.

- [227] David W. Fahey, David S. Lee, Aviation and climate change: A scientific perspective aviation and the impacts of climate change, *Carbon Climate Law Rev.* 2016 (2) (2016) 97–104, URL <https://ccrl.lexxion.eu/article/ccrl/2016/2/5>.
- [228] Ulrike Burkhardt, Bernd Kärcher, Global radiative forcing from contrail cirrus, *Nature Clim. Change* (ISSN: 1758-6798) 1 (11) (2011) 54–58, <http://dx.doi.org/10.1038/nclimate1068>.
- [229] Inés Sanz-Morère, Sebastian D. Eastham, Raymond L. Speth, Steven R.H. Barrett, Reducing uncertainty in contrail radiative forcing resulting from uncertainty in ice crystal properties, *Environ. Sci. Technol. Lett.* 7 (6) (2020) 371–375, <http://dx.doi.org/10.1021/acs.estlett.0c00150>.
- [230] Ernst Schmidt, Die entstehung von eisnebel aus den auspuffgasen von flugmotoren, *Schriften Der Deutschen Akademie Der Luftfahrtforschung* 5 (44) (1941) 1–15.
- [231] H. Appleman, The formation of exhaust condensation trails by jet aircraft, *Bull. Am. Meteorol. Soc.* (ISSN: 0003-0007, 1520-0477) 34 (1) (1953) 14–20, <http://dx.doi.org/10.1175/1520-0477-34.1.14>.
- [232] Ulrich Schumann, On conditions for contrail formation from aircraft exhausts, *Meteorol. Z.* 5 (1) (1996) 4–23, <http://dx.doi.org/10.1127/metz/5/1996/4>.
- [233] U. Schumann, J.E. Penner, Yibin Chen, Cheng Zhou, K. Graf, Dehydration effects from contrails in a coupled contrail–climate model, *Atmos. Chem. Phys.* (ISSN: 1680-7316) 15 (19) (2015) 11179–11199, <http://dx.doi.org/10.5194/acp-15-11179-2015>.
- [234] J.T. Houghton, L.G. Meira Filho, B.A. Callander, N. Harris, A. Kattenberg, Maskell K. (Eds.), *Climate Change 1995: The Science of Climate Change. Contribution of Working Group I to the Second Assessment Report of the Intergovernmental Panel on Climate Change*, Technical report, Cambridge University Press, Cambridge, United Kingdom, 1996.
- [235] J.T. Houghton, Y. Ding, D.J. Griggs, M. Noguer, P.J. van der Linden, X. Dai, K. Maskell, C.A. Johnson (Eds.), *Climate Change 2001: The Scientific Basis. Contribution of Working Group I to the Third Assessment Report of the Intergovernmental Panel on Climate Change*, Technical report, Cambridge University Press, Cambridge, United Kingdom, 2001.
- [236] Olivier Boucher, Air traffic may increase cirrus cloudiness, *Nature* (ISSN: 1476-4687) 397 (1999) 30–31, <http://dx.doi.org/10.1038/16169>.
- [237] D.W. Fahey, U. Schumann, S. Ackerman, P. Artaxo, O. Boucher, M.Y. Danilin, B. Kärcher, P. Minnis, T. Nakajima, O.B. Toon, Aviation-produced aerosols and cloudiness, in: J.E. Penner, D.H. Lister, D.J. Griggs, D.J. Dokken, M. McFarland (Eds.), *Intergovernmental Panel on Climate Change Special Report on Aviation and the Global Atmosphere*, Cambridge University Press, Cambridge, United Kingdom, 1999.
- [238] W.L. Smith, S. Ackerman, H. Revercomb, H. Huang, D.H. DeSlover, W. Feltz, L. Gumley, A. Collard, Infrared spectral absorption of nearly invisible cirrus clouds, *Geophys. Res. Lett.* (ISSN: 1944-8007) 25 (8) (1998) 1137–1140, <http://dx.doi.org/10.1029/97GL03491>.
- [239] P. Forster, T. Storelvmo, K. Armour, W. Collins, J.-L. Dufresne, D. Frame, D.J. Lunt, T. Mauritsen, M.D. Palmer, M. Watanabe, M. Wild, H. Zhang, The earth's energy budget, climate feedbacks, and climate sensitivity, in: V. Masson-Delmotte, P. Zhai, A. Pirani, S.L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M.I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J.B.R. Matthews, T.K. Maycock, T. Waterfield, O. Yelekçi, R. Yu, B. Zhou (Eds.), *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I To the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 2021, pp. 923–1054, <http://dx.doi.org/10.1017/9781009157896.009>.
- [240] Akshat Agarwal, Vincent R. Meijer, Sebastian D. Eastham, Raymond L. Speth, Steven R.H. Barrett, Reanalysis-driven simulations may overestimate persistent contrail formation by 100%–250%, *Environ. Res. Lett.* (ISSN: 1748-9326) 17 (1) (2022) <http://dx.doi.org/10.1088/1748-9326/ac38d9>.
- [241] Andrew Heymsfield, Darrel Baumgardner, Paul DeMott, Piers Forster, Klaus Gierens, Bernd Kärcher, Contrail microphysics, *Bull. Am. Meteorol. Soc.* (ISSN: 0003-0007, 1520-0477) 91 (4) (2010) 465–472, <http://dx.doi.org/10.1175/2009BAMS2839.1>.
- [242] Cheng Zhou, Joyce E. Penner, Aircraft soot indirect effect on large-scale cirrus clouds: Is the indirect forcing by aircraft soot positive or negative? *J. Geophys. Res.: Atmos.* (ISSN: 2169-8996) 119 (19) (2014) 11303–11320, <http://dx.doi.org/10.1002/2014JD021914>.
- [243] Lisa Bock, Ulrike Burkhardt, Contrail cirrus radiative forcing for future air traffic, *Atmos. Chem. Phys.* (ISSN: 1680-7316) 19 (12) (2019) 8163–8174, <http://dx.doi.org/10.5194/acp-19-8163-2019>.
- [244] Ulrike Burkhardt, Lisa Bock, Andreas Bier, Mitigating the contrail cirrus climate impact by reducing aircraft soot number emissions, *Npj Climate Atmosph. Sci.* (ISSN: 2397-3722) 1 (11) (2018) 1–7, <http://dx.doi.org/10.1038/s41612-018-0046-4>.
- [245] Christiane Voigt, Jonas Kleine, Daniel Sauer, Richard H. Moore, Tiziana Bräuer, Patrick Le Clercq, Stefan Kaufmann, Monika Scheibe, Tina Jurkat-Witschas, Manfred Aigner, Uwe Bauder, Yvonne Boose, Stephan Borrmann, Ewan Crosbie, Glenn S. Diskin, Joshua DiGangi, Valerian Hahn, Christopher Heckl, Felix Huber, John B. Nowak, Markus Rapp, Bastian Rauch, Claire Robinson, Tobias Schripp, Michael Shook, Edward Winstead, Luke Ziemba, Hans Schlager, Bruce E. Anderson, Cleaner burning aviation fuels can reduce contrail cloudiness, *Commun. Earth Environ.* (ISSN: 2662-4435) 2 (11) (2021) 1–10, <http://dx.doi.org/10.1038/s43247-021-00174-y>.
- [246] Michael Ponater, Susanne Pechtl, Robert Sausen, Ulrich Schumann, Gerhard Hüttig, Potential of the cryoplane technology to reduce aircraft climate impact: A state-of-the-art assessment, *Atmos. Environ.* (ISSN: 1352-2310) 40 (36) (2006) 6928–6944, <http://dx.doi.org/10.1016/j.atmosenv.2006.06.036>.
- [247] Klaus Gierens, Theory of contrail formation for fuel cells, *Aerospace* (ISSN: 2226-4310) 8 (66) (2021) 164, <http://dx.doi.org/10.3390/aerospace8060164>.
- [248] Woodrow Bellamy III, Universal hydrogen secures electric propulsion supplier in magnix, 2020, <https://www.aviationtoday.com/2020/09/23/universal-hydrogen-secures-electric-propulsion-supplier-magnix/>. (Accessed 28 September 2022).
- [249] Banavar Sridhar, Neil Y. Chen, Hok K. Ng, Energy efficient contrail mitigation strategies for reducing the environmental impact of aviation, in: *Proceedings of the 10th USA/Europe Air Traffic Management Research and Development Seminar*, 212, Chicago, Illinois, USA, 2013, [https://aviationsystems.arc.nasa.gov/publications/2013/ATM2013\\_Sridhar\\_Final.pdf](https://aviationsystems.arc.nasa.gov/publications/2013/ATM2013_Sridhar_Final.pdf).
- [250] Christiane Voigt, Ulrich Schumann, Andreas Minikin, Ahmed Abdelmonem, Armin Afchine, Stephan Borrmann, Maxi Boettcher, Bernhard Buchholz, Luca Bugliaro, Anja Costa, Joachim Curtius, Maximilian Dollner, Andreas Dörnbrack, Volker Dreiling, Volker Ebert, Andre Ehrlich, Andreas Fix, Linda Forster, Fabian Frank, Daniel Fütterer, Andreas Giez, Kaspar Graf, Jens-Uwe Grooß, Silke Groß, Katharina Heimerl, Bernd Heinold, Tilman Hüneke, Emma Järvinen, Tina Jurkat, Stefan Kaufmann, Mareike Kenntner, Marcus Klingebiel, Thomas Klimach, Rebecca Kohl, Martina Krämer, Trismono Candra Krisna, Anna Luebke, Bernhard Mayer, Stephan Mertes, Sergej Molleker, Andreas Petzold, Klaus Pfeilsticker, Max Port, Markus Rapp, Philipp Reutter, Christian Rolf, Diana Rose, Daniel Sauer, Andreas Schäfler, Romy Schlage, Martin Schnaiter, Johannes Schneider, Nicole Spelten, Peter Spichtinger, Paul Stock, Adrian Walser, Ralf Weigel, Bernadett Weinzierl, Manfred Wendisch, Frank Werner, Heini Wernli, Martin Wirth, Andreas Zahn, Helmut Ziereis, Martin Zöger, ML-CIRRUS: The airborne experiment on natural cirrus and contrail cirrus with the high-altitude long-range research aircraft HALO, *Bull. Am. Meteorol. Soc.* (ISSN: 0003-0007, 1520-0477) 98 (2) (2017) 271–288, <http://dx.doi.org/10.1175/BAMS-D-15-00213.1>.
- [251] Airbus, How Blue Condor will accelerate Airbus' first hydrogen-powered test flights, 2022, <https://www.airbus.com/en/newsroom/stories/2022-07-how-blue-condor-will-accelerate-airbus-first-hydrogen-powered-test-flights>. (Accessed 21 July 2022).